


Spiral Chip Inductor



Product may not
be to scale

FEATURES

- Wire bondable
- Small chip size: 0.050 inches square
- Alumina substrate
- Inductance up to 150 nH
- Inductor material: Thin film gold

The PSC Chip Inductors offer the best combination of size and value available. Generally custom built to specific value requirements, two versions are offered here.

These chips are manufactured using Vishay Electro-Films (EFI) sophisticated Thin Film equipment and manufacturing technology. The PSCs are 100 % electrically tested for inductance and Q.

APPLICATIONS

Primary application is in microwave circuits as resistant element or as choke in power supplies. High self-resonance is important for choke applications and achieved by reducing capacitance between turns by physically increasing space between spiral lines. Multi tap coils are available for wire bond tuning but since inductors are very sensitive to pattern width/spacing and metallization thickness almost all are custom built to specification desired.

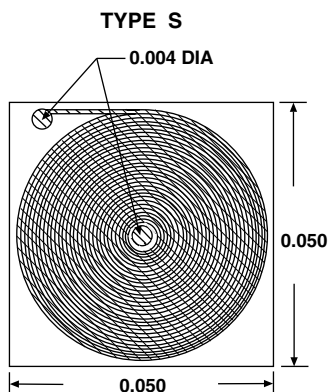
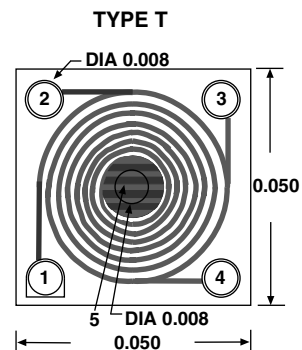
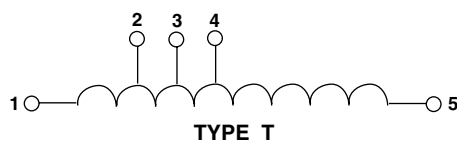
VALUES AND TOLERANCES

	TYPE S Single Bond	TYPE T Tunable
Q at 1 MHz	0.05	0.08
Tolerances	± 5 % to ± 25 %	± 10 % to ± 25 %
Steps		3 x 9 %

Custom values/sizes available. Quartz substrate available for higher Q.
Consult Application Engineer

STANDARD ELECTRICAL SPECIFICATIONS

PARAMETER	
Operating Temperature Range	- 55 °C + 125 °C
Dielectric Constant	9.8 for alumina
Coil Resistance	< 5 Ω
Insulation Resistance	10 ¹² Ω min.

CONFIGURATIONS in inches**SCHEMATIC****MECHANICAL SPECIFICATIONS** in inches

PARAMETER	
Chip Size	0.050 x 0.050 ± 0.003 (1.32 x 1.32 ± 0.076 mm)
Chip Thickness	0.015 ± 0.002 (0.38 ± 0.05 mm)
Chip Substrate Material	99.6 alumina, quartz available
Bonding Pad Size	TYPE S 4 mil diameter typ. TYPE T 8 mil diameter typ.
Pad Material	Gold

ORDERING INFORMATION

Example: PSC TYPE S, 140 nH, ± 10 %

P/N: PSC**S/T
TYPE**
140
 INDUCTANCE
 VALUE
 3 significant digits

0
 MULTIPLIER
 CODE
B = 0.01
A = 0.1
0 = 1
1 = 10

K
 TOLERANCE
 CODE
J = 5.0 %
K = 10 %
M = 20 %
L = 25 %



Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.