

150 WATT SWITCHING POWER SUPPLIES

DESCRIPTION

The PU150 series comprises single and multiple output models for 150 watts of continuous output power. Auto-ranging input allows them to operate from any line voltage throughout the world without a selector strap. All auxiliary outputs are with magnetic amplifier to keep regulation. The units are constructed on a printed circuit board with a U-bracket for mechanical support and heat sinking, in 1U height.

FEATURES

- Auto-ranging input
- Overvoltage protection
- Short-circuit protection with auto-recovery
- Power Fail Detect (PFD) signal on models With 5V output
- 100 % burn-in at full rated load

INPUT SPECIFICATIONS

Input voltage :	85 to 132 VAC, or 170 to 264 VAC (auto-ranging)
Input frequency :	47 to 63 Hz
Input current :	3.4A (rms) for 115VAC 2.0A (rms) for 230VAC
Leakage current :	0.4mA max. @ 115VAC, 60Hz 0.8mA max. @ 230VAC, 50Hz

OUTPUT SPECIFICATIONS

Output voltage/current :	See rating chart
Total output power :	150 watts maximum at 30 CFM forced air cooling or 110 watts maximum at convection cooling
Ripple and noise :	1 % peak to peak maximum
Overvoltage protection :	Provided on output #1 only; set at 112-136 % of its nominal output voltage
Overcurrent protection :	All outputs protected to short circuit conditions
Temperature coefficient :	All outputs ± 0.04 % /°C maximum
Transient response :	Maximum excursion of 4 % or better on all models, recovering to 1 % of final value within 500us after a 25 % step load change

ENVIRONMENTAL SPECIFICATIONS

Operating temperature :	0°C to +70°C
Storage temperature :	-40°C to +85°C
Relative humidity :	5 % to 95% non-condensing
Derating :	Derate from 100 % at +50°C Linearly to 50 % at +70°C

PU150 SERIES



Safety Standard Approvals :



UL 60950-1
File No. E137410



CSA C22.2 No. 60950-1
File No. LR93632



TÜV EN60950-1
Certificate No. R9954992

GENERAL SPECIFICATIONS

Switching frequency :	120KHz ± 15 %
Efficiency :	70 % typical on all models
Hold-up time :	15 msec minimum at 115VAC
Line regulation :	± 0.5 % maximum at full load
Inrush current :	20 amps @ 115VAC, or 40 amps @ 230VAC, at 25°C cold start
Withstand voltage :	3000VAC from input to output 1500VAC from input to ground 500VAC from output to ground
MTBF :	300,000 hours minimum at full load at 25°C ambient, calculated per MIL-HDBK-217F

EMC performance (EN55024)

EN55022:	Class B conducted, Class B radiated
FCC:	Class B conducted, Class B radiated
VCCI:	Class B conducted, Class B radiated
EN61000-3-2:	Harmonic distortion, Class A
EN61000-3-3:	Line flicker
EN61000-4-2:	ESD, ± 8 KV air and ± 4 KV contact
EN61000-4-3:	Radiated immunity, 3V/m
EN61000-4-4:	Fast transient/burst, ± 1 KV
EN61000-4-5:	Surge, ± 1 KV diff., ± 2 KV com.
EN61000-4-6:	Conducted immunity, 3Vrms
EN61000-4-8:	Magnetic field immunity, 1A/m
EN61000-4-11:	Voltage dips, 30 % reduction for 500ms and >95 % reduction for 10ms


OUTPUT VOLTAGE/CURRENT RATING CHART

(1)(2)	Output #1 (3)					Output #2					Output #3				Output #4					Output
Model	Vnom	Imin	Imax.	Ipeak	Tol.	Vnom	Imin	Imax.	Ipeak	Tol.	Vnom.	Imin.	Imax.	Tol.	Vnom	Imin.	Imax.	Ipeak	Tol.	Power
PU150-10B	5V	0A	30A	35A	2%	(N/A)					(N/A)				(N/A)					150W
PU150-12B	12V	0A	12.5A	14.5A	2%	(N/A)					(N/A)				(N/A)					150W
PU150-13B	15V	0A	10A	11.6A	2%	(N/A)					(N/A)				(N/A)					150W
PU150-13-1B	18V	0A	8.3V	9.7A	2%	(N/A)					(N/A)				(N/A)					150W
PU150-14B	24V	0A	6.3A	7.3A	2%	(N/A)					(N/A)				(N/A)					150W
PU150-16B	30V	0A	5.0A	6.0A	2%	(N/A)					(N/A)				(N/A)					150W
PU150-17B	36V	0A	4.2A	4.8A	2%	(N/A)					(N/A)				(N/A)					150W
PU150-18B	48V	0A	3.1A	3.6A	2%	(N/A)					(N/A)				(N/A)					150W
PU150-23B	+5V	2.0A	22A	30A	2%	+12V	0A	8A	10A	3%	(N/A)				(N/A)					150W
PU150-24B	+5V	2.0A	22A	30A	2%	+15V	0A	6.4A	8A	3%	(N/A)				(N/A)					150W
PU150-25B	+5V	2.0A	22A	30A	2%	+24V	0A	4.5A	5A	3%	(N/A)				(N/A)					150W
PU150-30B	+5V	2.0A	22A	30A	2%	+12V	0A	8A	10A	3%	-5V	0A	2.5A	3%	(N/A)					150W
PU150-31B	+5V	2.0A	22A	30A	2%	+12V	0A	8A	10A	3%	-12V	0A	2.5A	3%	(N/A)					150W
PU150-32B	+5V	2.0A	22A	30A	2%	+15V	0A	6.4A	8A	3%	-15V	0A	2A	3%	(N/A)					150W
PU150-33B	+5V	2.0A	22A	30A	2%	+15V	0A	6.4A	8A	3%	-12V	0A	2.5A	3%	(N/A)					150W
PU150-40B	+5V	2.0A	22A	30A	2%	+12V	0A	8A	10A	3%	-12V	0A	2.5A	3%	5V	0A	5A	5A	3%	150W
PU150-41B	+5V	2.0A	22A	30A	2%	+15V	0A	6.4A	8A	3%	-15V	0A	2A	3%	24V	0A	4.5A	5A	3%	150W
PU150-42B	+5V	2.0A	22A	30A	2%	+12V	0A	8A	10A	3%	-12V	0A	2.5A	3%	12V	0A	4.5A	5A	3%	150W
PU150-44B	+5V	2.0A	22A	30A	2%	+12V	0A	8A	10A	3%	-15V	0A	2A	3%	15V	0A	4A	4.5A	3%	150W
PU150-45B	+5V	2.0A	22A	30A	2%	+12V	0A	8A	10A	3%	-12V	0A	2.5A	3%	24V	0A	4.5A	5A	3%	150W

Notes: (1) Safety agency approvals are for the above listed models in U-braket format. To order model with a matallic cover, change suffix "B" to "C" for enclosed format (mechanical details shown in page7-3). e.g. PU150-45C
 (2) Output #1 can be built for one-wire current sharing. Add suffix "Z", e.g. PU150-45B-Z for this requirement.
 (3) The maximum current of each output shall be derated to 75% if no forced air is provided by user.
 (4) The output #1 of all multiple output models needs a minimum load of 2A to support the other outputs at their maximum rated loads.

MECHANICAL SPECIFICATIONS


Single Output models

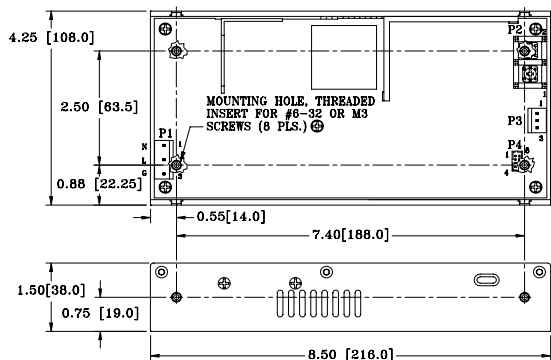

NOTES:

1. Dimensions shown in inch [mm]
2. Tolerance 0.02 [0.5] maximum
3. Input connector P1 mates with Molex housing 09-50-3051 and Molex 2878 series crimp terminal.
4. Output connector P3 mates with Molex housing 09-50-3031 and Molex 2878 series crimp terminal.
5. Connector P4 mates with Molex housing 51110-0851 and pins 50394-8100.
6. Weight: 0.84 kgs (1.86 Lbs.) approx.

Multiple Output models

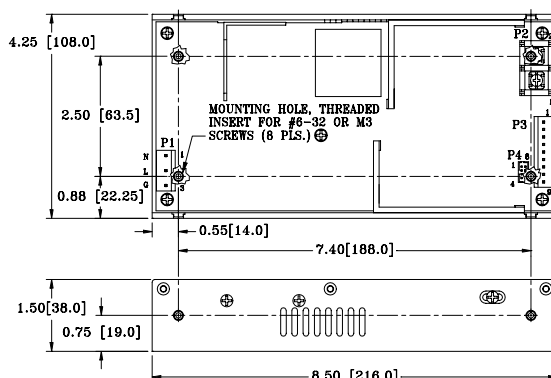

NOTES:

1. Dimensions shown in inch [mm]
2. Tolerance 0.02 [0.5] maximum
3. Input connector P1 mates with Molex housing 09-50-3051 and Molex 2878 series crimp terminal.
4. Output connector P3 mates with Molex housing 09-50-3091 and Molex 2878 series crimp terminal.
5. Connector P4 mates with Molex housing 51110-0851 and pins 50394-8100.
6. Weight: 0.84 kgs (1.86 Lbs.) approx.

PIN CHART

Single Output Models

CONN PIN MODEL		P1			P2		P3		
		1	2	3	1	2	1	2	3
PU150-10		AC NEUTRAL	AC LIVE	AC GROUND	COM. RET.	OUTPUT #1	PFD	N.C.	COM. RET.
PU150-12	PU150-13	AC NEUTRAL	AC LIVE	AC GROUND	COM. RET.	OUTPUT #1	N.C.	N.C.	N.C.
PU150-13-1	PU150-14								
PU150-16	PU150-17								
PU150-18									

CONN PIN MODEL		P4							
		1	2	3	4	5	6	7	8
PU150-10	PU150-12	COM RET INHIBIT -Ve	INHIBIT +Ve	N.C.	N.C.	COM. RET.	-SENSE	+SENSE	CURRENT SHARE
PU150-13	PU150-13-1								
PU150-14	PU150-16								
PU150-17	PU150-18								

Multiple Output Models

CONN MODEL PIN		P1			P2		P3															
		1	2	3	1	2	1	2	3	4	5,6,7	8,9										
PU150-23	PU150-24	AC	AC	AC	COM.	OUTPUT	N.C.	N.C.	PFD	N.C.	COM.	OUTPUT										
PU150-25		NEUTRAL	LIVE	GROUND	RET.	#1							RET.	#2								
PU150-30	PU150-31	AC	AC	AC	COM.	OUTPUT	N.C.	N.C.	PFD	OUTPUT	COM.	OUTPUT										
PU150-32	PU150-33	NEUTRAL	LIVE	GROUND	RET.	#1							RET.	#3	#2							
PU150-40	PU150-41	AC	AC	AC	COM.	OUTPUT	OUTPUT #4	OUTPUT	PFD	OUTPUT	COM.	OUTPUT										
PU150-42	PU150-44												NEUTRAL	LIVE	GROUND	RET.	#1	RETURN	#4	#3	RET.	#2
PU150-45																						

CONN PIN MODEL		P4							
		1	2	3	4	5	6	7	8
PU150-23	PU150-30	INHIBIT -Ve	INHIBIT +Ve	+12V (FAN)	N.C.	COM RET.	-SENSE	+SENSE	CURRENT SHARE
PU150-31	PU150-40								
PU150-42	PU150-44								
PU150-45									
PU150-24	PU150-32	INHIBIT -Ve	INHIBIT +Ve	+15V (FAN)	N.C.	COM. RET.	-SENSE	+SENSE	CURRENT SHARE
PU150-33	PU150-41								
PU150-25		INHIBIT -Ve	INHIBIT +Ve	+24V (FAN)	N.C.	COM. RET.	-SENSE	+SENSE	CURRENT SHARE