


LTR	REVISION	DATE	APPD
-	RELEASED	08-03-07	MM

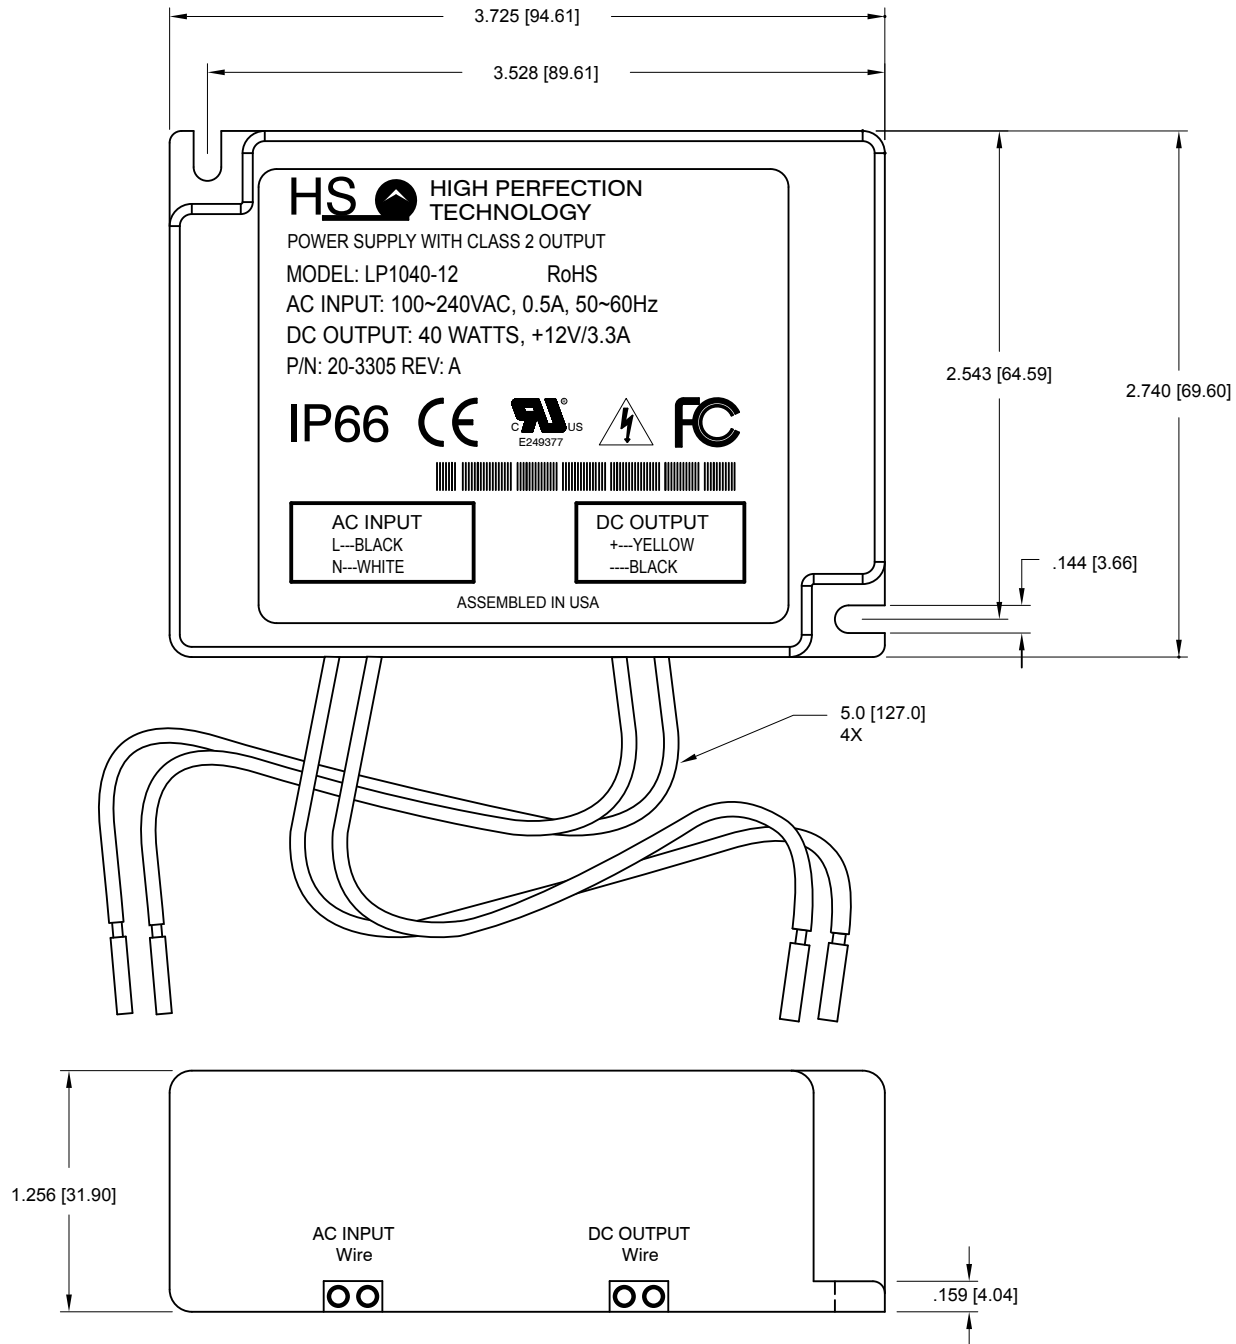

SPECIFICATIONS

1. AC INPUT: 90~264Vac/0.5A/47~63Hz.
2. INPUT INRUSH CURRENT: <10A/115Vac, <20A/230Vac
3. POWER FACTOR: Max. >0.92 AT FULL LOAD, 115Vac, 230Vac
4. CURRENT CREST FACTOR: 1.5 MAX
5. TOTAL HARMONIC DISTORTION: 20% MAX
6. EFFICIENCY: 85% Typical
7. PROTECTION: OCP, OVP, SCP-Auto Recovery.
8. OPERATION TEMP: -30°C~+60°C, Tc:90°C
9. STORAGE TEMP: -40°C~+85°C.
10. MTBF (@25°C): >100,000 Hours. MIL-217F.
11. SAFETY: UL1310 CLASS 2, UL48, cUL
12. WEIGHT: 370 GRAMS TYPICAL

PWR-12V-3.3A-3.3A-PF	7-12V	3.3±5%	40W
LEDTRONICS PART NO.	DC OUTPUT VOLTAGE	DC OUTPUT CURRENT (A)	WATTS MAX.
ELECTRICAL TEST			

RoHS
COMPLIANT
2002/95/EC

LED[®]
LEDTRONICS, INC.[®]
23105 KASHIWA COURT
TORRANCE, CA 90505

-PROPRIETARY-
This document contains Proprietary
information of LEDTRONICS, INC.[™]
It may not be copied, used or disclosed
for any purpose without the prior express
written consent of LEDTRONICS, INC.[™]

XXX ± .010 TOLERANCE PER ANSI-Y14.5
.XX ± .025 (UNLESS OTHERWISE STATED)
ANGLES ± 0°, 30°
FRACT. ± 1/32

TITLE			
PWR-12V-3.3A-3.3A-PF			
DWG NO	SCALE	SHEET	DATE
CMMS0384	1:1	1 OF 1	08-03-07
CODE IDENT NO.	DWG BY	CHK BY	QA
8Z410	MM	PL 08-15-07	JCH 08-09-07
MNFG		CUSTOMER	