



Precision Voltage References

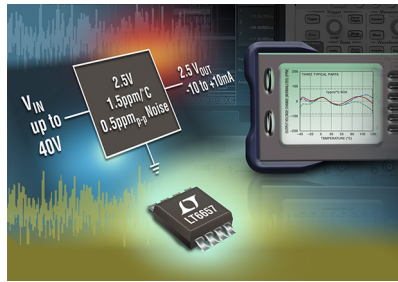


LT®6657

- 1.5ppm/°C Max
- Low Noise: 0.5ppm_{P-P} (0.1Hz to 10Hz)
- Wide Supply Range to 40V
- Sinks and Sources $\pm 10\text{mA}$
- Fully Specified from -40°C to 125°C
- MSOP-8 Package

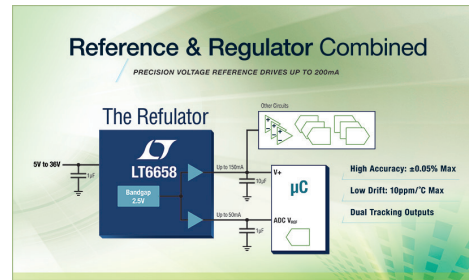


LT6658

- 0.05%, 10ppm/°C Max
- Low Noise: 1.5ppm_{P-P} (0.1Hz to 10Hz)
- Wide Supply Range to 36V
- Dual Tracking Outputs Source 150mA, 50mA
- Load Regulation: 0.1ppm/mA
- Independently Adjustable Output Voltage

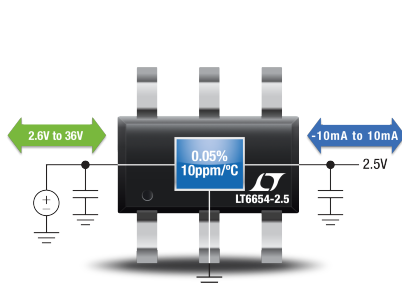


LT6654

- 0.05%, 10ppm/°C Max
- Wide Supply Range to 36V
- Low Noise: 1.6ppm_{P-P} (0.1Hz to 10Hz)
- Sinks and Sources $\pm 10\text{mA}$
- Fully Specified from -55°C to 125°C
- SOT-23 Package

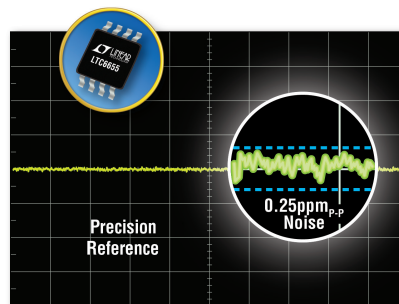

LTC®6655

- Ultralow Noise: 0.25ppm_{P-P} (0.1Hz to 10Hz)
- 0.025%, 2ppm/°C Max
- 100% Tested at -40° , 25°C , and 125°C
- V_S Up to 13.2V
- Low Power Shutdown: $<20\mu\text{A}$
- 8-Lead MSOP Package

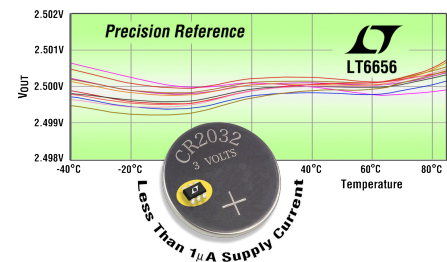


LT6656

- Ultralow Supply Current: 0.85 μA
- 0.05%, 10ppm/°C Max
- 10mV Dropout Voltage
- Fully Specified from -40°C to 85°C
- V_S Up to 18V
- Low Power Shutdown: $<20\mu\text{A}$
- Reverse Input/Output Protection
- SOT-23 Package

1.25V • 2.048V • 2.5V • 3V • 3.3V • 4.096V • 5V

A voltage reference functions as an independent standard in measurement and detection circuits, and often determines the accuracy of the entire electronic system. For help in understanding which factors will impact your design, read "How To Choose a Voltage Reference" at linear.com/vrefselect. This article discusses the most critical reference specifications and how they impact overall accuracy. It also covers the differences between bandgap and Zener architectures as well as series vs shunt references.



www.linear.com/vrefselect

Series

Reference Family	Initial Accuracy	Temperature Drift (Max) ppm/°C	0.1Hz - 10Hz Noise ppm	Output Current mA	I _Q /I _{SHUNT} mA	Dropout Headroom V	Package	Temperature Grades	1.25V	2.048V	2.5V	3V	3.3V	4.096V	4.5V	5V	7V	10V
LTC6655B	0.025%	2	0.25	±10	7	0.5	MS-8	H	•									
LT1461A	0.04%	3	8	50	0.05	0.3	SO-8	C, I			•	•	•	•		•		
LT6658A	0.05%	10	1.5	-20 to 150 -20 to 50	3	2.5	MS-16	I, H	1.2V, 1.8V		•	•	•			•		
LT1027B	0.05%	2	0.6	-10 to +15	3.1	3	DIP-8	C								•		
LT1027C	0.05%	3	0.6	-10 to +15	3.1	3	DIP-8 SO-8	C								•		
LT1019A	0.05%	5	2.5	±10	1	1.1	DIP-8 SO-8	C, I			•					•		•
LT1031B	0.05%	5	0.6	±10	1.7	1	TO-39	C, M								•		•
LT1236A	0.05%	5	0.6	±10	1.2	2.2	DIP-8 SO-8	C, I								•		•
LTC6652A	0.05%	5	2.8	±5	0.56	0.3	MS-8	H	•	•	•	•	•	•		•		
LTC6655C	0.05%	5	0.25	±10	7	0.5	MS-8	H	•	•	•	•	•	•		•		
LT1027D	0.05%	5	0.6	-10 to +15	2.7	3	DIP-8 SO-8	C								•		
LT6654A	0.05%	10	0.8 to 2.2	±10	0.6	0.1	SOT-23	H, M	•	•	•	•	•	•		•		
LT6656A	0.05%	10	24	-0.1 to 10	0.001	0.01	SOT-23, DFN	C, I	•	•	•	•	•	•		•		
LT1790A	0.05%	10	16	-3 to 5	0.06	0.1	SOT-23	C, I	•	•		•	•	•		•		
LT1021C	0.05%	20	0.6	±10	1.2	2.2	TO-5 DIP-8	C, I, M								•		•
LT1461B	0.06%	7	8	50	0.05	0.3	SO-8	C, I			•	•	•	•		•		
LT1460A	0.075%	10	4	-1 to 20	0.175	0.9	DIP-8 SO-8	C			•					•		•
LT1461C	0.08%	12	8	50	0.05	0.3	SO-8	C, I			•	•	•	•		•		
LT1027E	0.10%	7.5	0.6	-10 to +15	2.7	3	DIP-8 SO-8	C								•		
LT6657A	0.10%	1.5	0.5	±10	1.8	0.05	MS-8	H	•		•	•		•		•		
LT6657B	0.10%	3	0.5	±10	1.8	0.05	MS-8	H	•		•	•		•		•		
LT1236B	0.10%	10	0.6	±10	1.2	2.2	DIP-8 SO-8	C, I								•		•
LTC6652B	0.10%	10	2.1	±5	0.56	0.3	MS-8	H	•	•	•	•	•	•		•		
LT1460B	0.10%	10	4	-1 to 20	0.175	0.9	DIP-8 SO-8	I			•					•		•
LT1031C	0.10%	15	0.6	±10	1.7	1	TO-39	C								•		•
LT1236C	0.10%	15	0.6	±10	1.2	2.2	DIP-8 SO-8	C, I								•		•
LT1460C	0.10%	15	4	-1 to 20	0.175	0.9	MS-8	C			•					•		•
LT6658B	0.10%	20	1.5	-20 to 150 -20 to 50	3	2.5	MS-16	I, H	1.2V, 1.8V		•	•	•			•		
LT6654B	0.10%	20	0.8 to 2.2	±10	0.6	0.1	SOT-23	H, M	•	•	•	•	•	•		•		
LT6656B	0.10%	20	24	-0.1 to 10	0.001	0.01	SOT-23, DFN	C, I	•	•	•	•	•	•		•		
LT1460D	0.10%	20	4	-1 to 20	0.175	0.9	DIP-8 SO-8	C			•	•	•	•		•		•
LT1790B	0.10%	25	16	-3 to 5	0.06	0.1	SOT-23	C, I	•	•		•	•	•		•		
LT1460E	0.125%	20	4	-1 to 20	0.175	0.9	DIP-8 SO-8	I			•					•		•
LT1461D	0.15%	20	8	10	0.05	0.3	SO-8	H			•	•	•	•		•		
LT1460F	0.15%	25	4	-1 to 20	0.175	0.9	MS-8	C			•					•		•
LTC1798	0.15%	40	8	-2 to 10	0.0065	0.1	SO-8	C			•	•		•		•		
LTC1258	0.15%	40	8	-2 to 10	0.0065	0.1	MS-8	C			•	•		•		•		
LT1019	0.20%	20	2.5	±10	1.2	1.1	DIP-8 SO-8	C, I			•	•			•	•		•
LT1460H	0.20%	20	4	-1 to 20	0.175	0.9	SOT-23	C			•	•	•			•		•
LT1460L	0.20%	20	4	-1 to 20	0.175	0.9	SO-8	I, H			•					•		
LT6660H	0.20%	20	4	-1 to 20	0.2	0.9	2 x 2mm DFN	C			•	•	•			•		•
LT1031D	0.20%	25	0.6	±10	1.7	1	TO-39	C, M								•		•
LT1460M	0.20%	50	4	-1 to 20	0.175	0.9	SO-8	H			•					•		
LT1460G	0.25%	25	4	-1 to 20	0.175	0.9	TO-92	C, I			•					•		•
LT1460J	0.40%	20	4	-1 to 20	0.175	0.9	SOT-23	C			•	•	•			•		•
LT6660J	0.40%	20	4	-1 to 20	0.2	0.9	2 x 2mm DFN	C			•	•	•			•		•
LT6650	0.5%	30 Typ	50	±0.2	0.011	0.1	SOT-23	C, I, H						Adjustable				
LT1460K	0.5%	50	4	-1 to 20	0.175	0.9	SOT-23	C			•	•	•			•		
LT6660K	0.5%	50	4	-1 to 20	0.2	0.9	2 x 2mm DFN	C			•	•	•			•		•
LT1021B	1%	5	0.6	±10	1.2	2.2	TO-5 DIP-8	C, M								•	•	•
LT1021D	1%	20	0.6	±10	1.2	2.2	SO-8 DIP-8	C, I								•	•	•
LT580xH	0.4%	10	4	10	1	2	TO-52				•							
LT581xH	0.3%	10	1	5	1	3	TO-39	-55°C to 200°C										•
LT582xH	0.3%	10		5	1	3	TO-39									•		

Shunt

LT1389A	0.05%	10	20	Shunt	0.006 to 2	N/A	SO-8	C	•									
LT1634A	0.05%	10	7	Shunt	0.008 to 20	N/A	SO-8	C, I	•		•			•		•		
LT1389B	0.05%	20	20	Shunt	0.006 to 2	N/A	SO-8	C	•		•					•		
LT1634B	0.05%	25	7	Shunt	0.008 to 20	N/A	SO-8 MS-8	C, I	•		•			•		•		
LT1389B	0.075%	50	20	Shunt	0.006 to 2	N/A	SO-8	C					•			•		
LT1029A	0.2%	20		Shunt	0.6 to 10	N/A	TO-92	C								•		
LT1009	0.2%	25		Shunt	0.4 to 10	N/A	SO-8 MS-8 TO-92	C, I			•							
LT1634C	0.2%	25	7	Shunt	0.007 to 30	N/A	TO-92	C	•		•			•		•		
LT1004	0.3%	20 typ		Shunt	0.01 to 20	N/A	SO-8 TO-92	C, I	•		•							
LTC1431	0.4%	30 Typ	10	Shunt	1 to 100	N/A	DIP-8 TO-92	C, I						Adjustable				
LT1029	1%	34		Shunt	0.6 to 10	N/A	TO-92	C								•		
LT1034B	1.2%	20	2.4	Shunt	0.02 to 20	N/A	TO-92	C, I	•		•							
LT1034	1.2%	40	2.4	Shunt	0.02 to 20	N/A	SO-8 TO-92	C, I	•		•							
LTZ1000	4%	0.05	0.17	Shunt	N/A	N/A	TO-5	M									•	
LM399A	5%	1	1.4	Shunt	N/A	N/A	TO-46	C									•	
LM399	5%	2	1.4	Shunt	N/A	N/A	TO-46	C									•	

*Some parameters vary between package, voltage and temperature versions. For a complete list of products and full specifications visit www.linear.com

Best Better Good