tyco Electronics


HARTMAN Aerospace Power Products

AC Current Sensor

QR-50AF SPST, .25 Amp, 115 VAC




Features:
- SPST Main Contacts
- Current Indicator
- Epoxy Encapsulated
- 115 VAC
- .25 Amp
- High Reliability
- Meets many requirements of MIL-R-6106
- Light Weight Construction

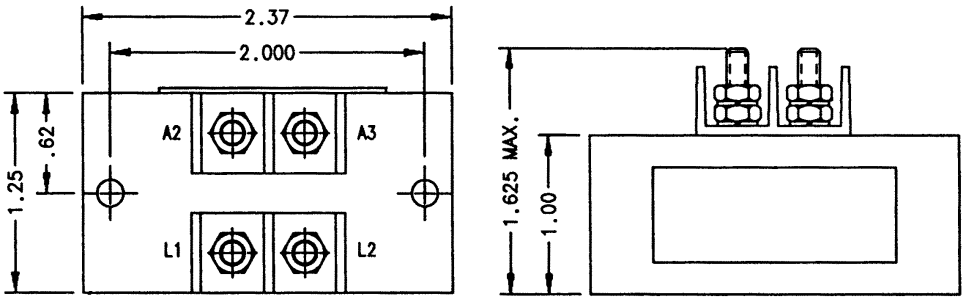

Dimensions for this product are expressed in inches.
Multiply values by 25.4 for millimeters.

CONTACTOR CONFIGURATION

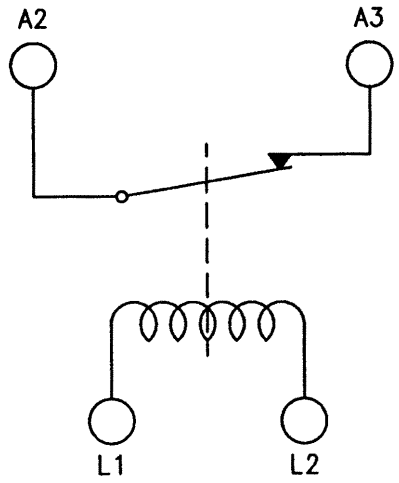

Notes:

PRODUCT SPECIFICATIONS	
Operating Characteristics	
Pick-Up	.5 Amp AC Maximum
Drop-Out	.1 Amp AC Minimum
Continuous	15 Amps AC Maximum
Weight Maximum	4 Oz.
Temperature	-55°C to +71°C
Vibration	10 G'S to 500 Hz
Altitude	50,000 Feet Maximum
Contact Rating	.25 Amp 28 VDC
Lamp Load	.080 Amp 28 VDC

For factory-direct application assistance, contact the HARTMAN product team at (419) 521-9500, Fax (419) 526-2749.

© 2004 by Tyco Electronics Corporation. All Rights Reserved.
HARTMAN and TYCO are trademarks.

Catalog (web doc only)
Revised 5-04

www.tycoelectronics.com

Dimensions are in inches and millimeters unless otherwise specified. Values in brackets are metric equivalents.

Dimensions are shown for reference purposes only. Specifications subject to change.

USA: 1-800-522-6752
Canada: 1-905-470-4425
Mexico: 01-800-733-8926
C. America: 52-55-5-729-0425
South America: 55-11-3611-1514
Hong Kong: 852-2735-1628
Japan: 81-44-844-8013
UK: 44-141-810-8967