R1200 THRU R2000

Reverse Voltage - 1200 to 2000 Volts Forward Current - 0.5/0.2 Ampere


HIGH VOLTAGE RECTIFIER

RoHS COMPLIANT


Features

- The plastic package carries Underwriters Laboratory Flammability Classification 94V-0
- Construction utilizes void-free molded plastic technique Low reverse leakage
- High forward surge current capability
- High temperature soldering guaranteed:
- 250°C/10 seconds,0.375”(9.5mm) lead length, 5 lbs. (2.3kg) tension

DO-41

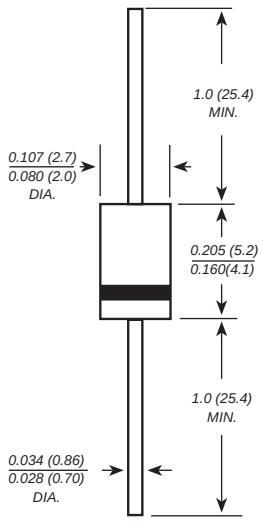

DO-15

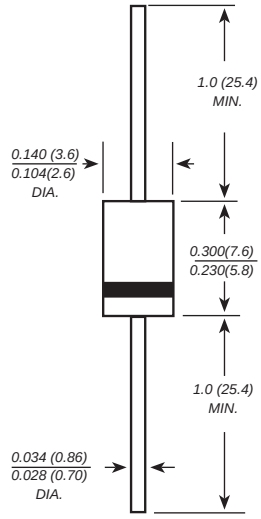

Dimensions in inches and (millimeters)

Mechanical Data

Case : JEDEC DO-41/DO-15 Molded plastic body
Terminals : Solder plated, solderable per MIL-STD-750,Method 2026
Polarity : Polarity symbol marking on body
Mounting Position : Any
Weight :0.012 ounce, 0.33 grams(DO-41)
0.014 ounce, 0.40 grams(DO-15)

Maximum Ratings And Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwisespecified.

Single phase half-wave 60Hz,resistive or inductive load,for capacitive load current derate by 20%.

Parameter	SYMBOLS	R1200	R1500	R1800	R2000	UNITS
Marking Code		MDD R1200	MDD R1500	MD R1800	MDD R2000	
Maximum repetitive peak reverse voltage	V_{RRM}	1200	1500	1800	2000	V
Maximum RMS voltage	V_{RMS}	840	1050	1260	1400	V
Maximum DC blocking voltage	V_{DC}	1200	1500	1800	2000	V
Maximum average forward rectified current 0.375”(9.5mm) lead length(see fig.1)	$I_{(AV)}$	0.5			0.2	A
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I_{FSM}	30.0				A
Maximum instantaneous forward voltage at 0.5/0.2A	V_F	2.0			3.0	V
Maximum DC reverse current T_A=25°C at rated DC blocking voltage T_A=100°C	I_R	5.0 50.0				μA
Typical junction capacitance (NOTE 1)	C_J	15.0				pF
Typical thermal resistance (NOTE 2)	$R_{\theta JA}$	50.0				°C/W
Operating junction and storage temperature range	T_J,T_{STG}	-65 to +150				°C

Note:1.Measured at 1MHz and applied reverse voltage of 4.0V D.C.
2.Thermal resistance from junction to ambient at 0.375”(9.5mm)lead length,P.C.B. mounted

Download from alldatasheet.com

Ratings And Characteristic Curves

FIG. 1- FORWARD CURRENT DERATING CURVE

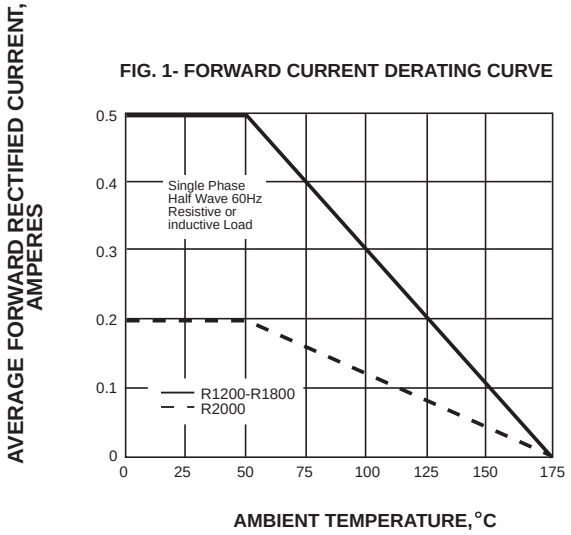


FIG. 2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

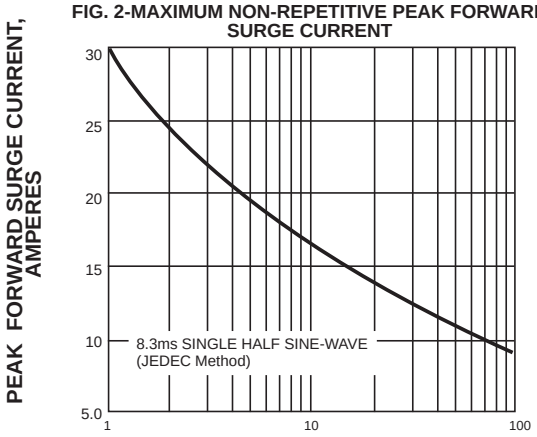


FIG. 3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

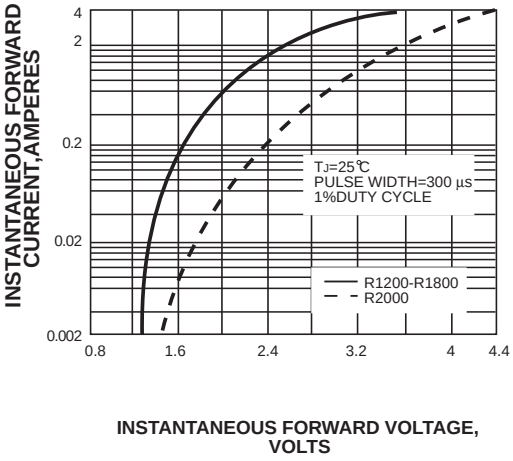


FIG. 4-TYPICAL REVERSE CHARACTERISTICS

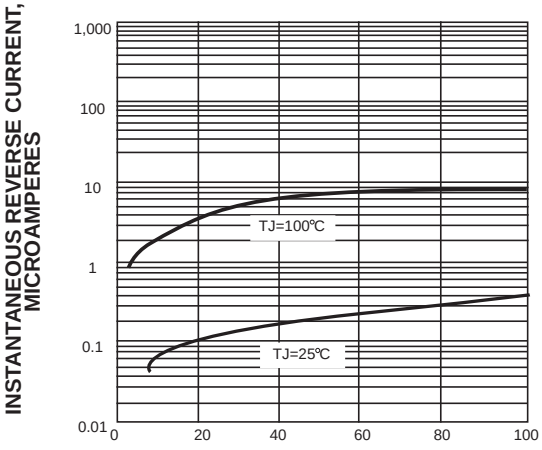


FIG. 5-TYPICAL JUNCTION CAPACITANCE


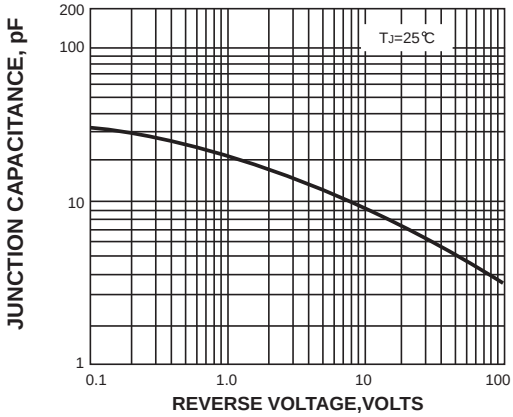


FIG. 6-TYPICAL TRANSIENT THERMAL IMPEDANCE

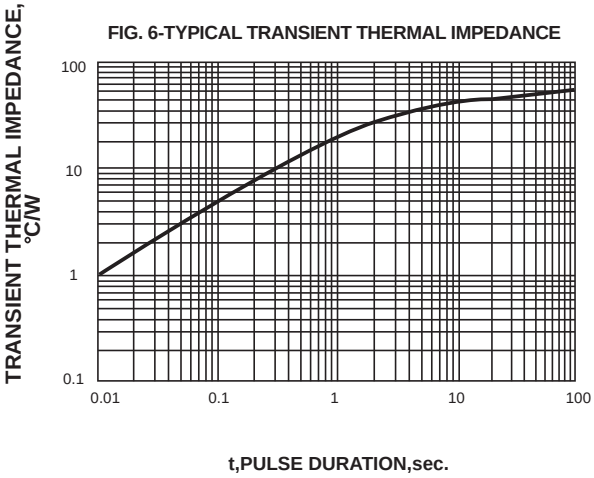

The curve above is for reference only.

Download from alldatasheet.com