



R200LD10

LINEAR INTEGRATED CIRCUIT


VOLTAGE REGULATOR

DESCRIPTION


The UTC **R200LD10** shows a high current, high accuracy, low-dropout voltage. The features are: low dropout voltage, very low ground current. Cause the series have been designed for high current loads, so they are also used in lower current, extremely low dropout-critical systems (in which their tiny dropout voltage and ground current values are important attributes).

FEATURES

- * Built-in ON/OFF function,
 - * Over current protection function,
 - * ASO protection function
 - * Overheat protection function
 - * 0.3A / 3.3V(R1=2K Ω)
- Output low dropout voltage regulator



TO-252-5




TO-252-4

ORDERING INFORMATION

Ordering Number		Package	Packing
Lead Free	Halogen Free		
R200LD10L-TN4-L	R200LD10G-TN4-L	TO-252-4	Tape Reel(Reserve Feed)
R200LD10L-TN4-R	R200LD10G-TN4-R	TO-252-4	Tape Reel(Standard Feed)
R200LD10L-TN4-T	R200LD10G-TN4-T	TO-252-4	Tube
R200LD10L-TN5-R	R200LD10G-TN5-R	TO-252-5	Tape Reel
R200LD10L-TN5-T	R200LD10G-TN5-T	TO-252-5	Tube

R200LD10L-TN4-R



- (1)Packing Type
- (2)Package Type
- (3)Lead Free

(1) R: Tape Reel(Standard Feed), T: Tube,
L: Tape Reel(Reserve Feed)


(2) TN4: TO-252-4, TN5: TO-252-5

(3) G: Halogen Free, L: Lead Free

■ PIN DESCRIPTIONS

PIN NO.	PIN NAME	PIN FUNCTION
1	V_{IN}	DC Input Voltage.
2	V_C	On/Off Control
3	V_{OUT}	DC Output Voltage.
4	V_{ADJ}	Output Voltage Adjustment
5	GND	Ground

■ BLOCK DIAGRAM

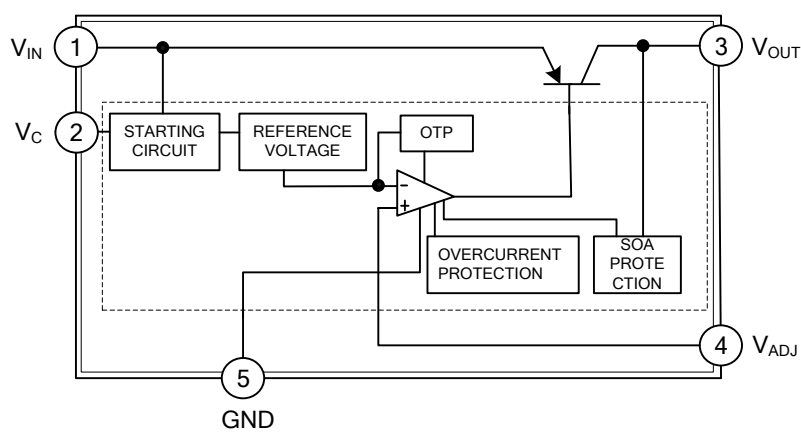

■ ABSOLUTE MAXIMUM RATINGS ($T_A=25^{\circ}\text{C}$)

PARAMETER	SYMBOL	RATINGS	UNIT
Input Voltage (Note 2)	V_{IN}	24	V
ON/OFF Control Terminal Voltage (Note 2)	V_C	24	V
Output Adjustment Pin Voltage (Note 2)	V_{ADJ}	5	V
Output Current	I_{OUT}	1	A
Power Dissipation (with infinite heat sink)	P_D	8	W
Junction Temperature	T_J	+150	$^{\circ}\text{C}$
Operating Temperature	T_{OPR}	-40 ~ +85	$^{\circ}\text{C}$
Storage Temperature	T_{STG}	-40 ~ +150	$^{\circ}\text{C}$

Note: 1. Absolute maximum ratings are those values beyond which the device could be permanently damaged.

Absolute maximum ratings are stress ratings only and functional device operation is not implied.

2. All are open except GND and applicable terminals.


■ ELECTRICAL CHARACTERISTICS

($V_{IN}=5\text{V}$, $V_{OUT}=3.3\text{V}$ ($R_1=2\text{k}\Omega$), $I_{OUT}=0.3\text{A}$, $V_C=2.7\text{V}$, $T_J=25^{\circ}\text{C}$, $C_I=0.33\mu\text{F}$, $C_O=10\mu\text{F}$, unless otherwise specified)

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNIT
Input Voltage	V_{IN}		3.5		24	V
Output Voltage	V_{OUT}		3.0		20	V
Load Regulation	$\Delta V_{OUT}/\Delta I_{OUT}$	$I_{OUT} = 5\text{mA} \sim 1\text{A}$			1.0	%
Line Regulation	$\Delta V_{OUT}/\Delta V_{IN}$	$V_{IN} = 4 \sim 10\text{V}$, $I_{OUT}=5\text{mA}$			1.0	
Ripple Rejection	RR	Refer to Fig 3		60		dB
Dropout Voltage	V_D	$V_{IN}=3.5\text{V}$			0.5	V
Reference Voltage	V_{REF}		2.583	2.65	2.717	
Temperature Coefficient of Reference Voltage	$T_C V_{REF}$	$T_J = 0 \sim 125^{\circ}\text{C}$, $I_{OUT} = 5\text{mA}$		± 1.0		%
On-State Voltage for Control	$V_{C(ON)}$	(Note)	2.0			V
On-State Current for Control	$I_{C(ON)}$				200	μA
On-State Voltage for Control	$V_{C(OFF)}$	$I_{OUT}=0\text{A}$			0.8	V
On-State Current for Control	$I_{C(OFF)}$	$I_{OUT}=0\text{A}$, $V_C=0.4\text{V}$			-2	μA
Quiescent Current	I_Q	$I_{OUT}=0\text{A}$			8	mA
Output Off-State Consumption Current	I_{QS}	$V_C=0.4\text{V}$			5	μA


Note: In case of V_C pin, output voltage turns OFF.

■ TYPICAL APPLICATION CIRCUIT

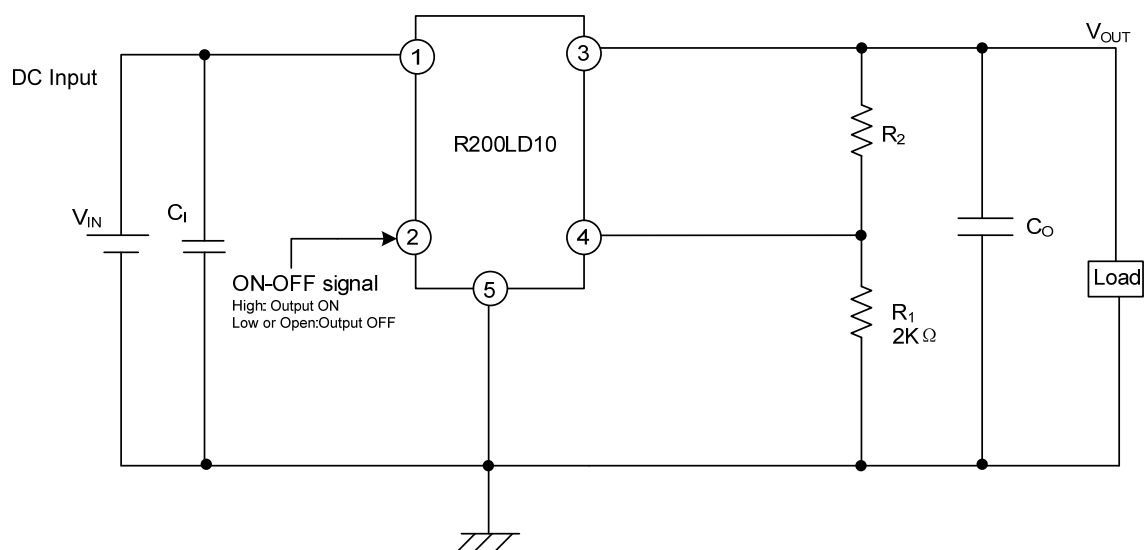


■ TEST CIRCUIT







For Standard Measuring Circuit of Regulation Portion

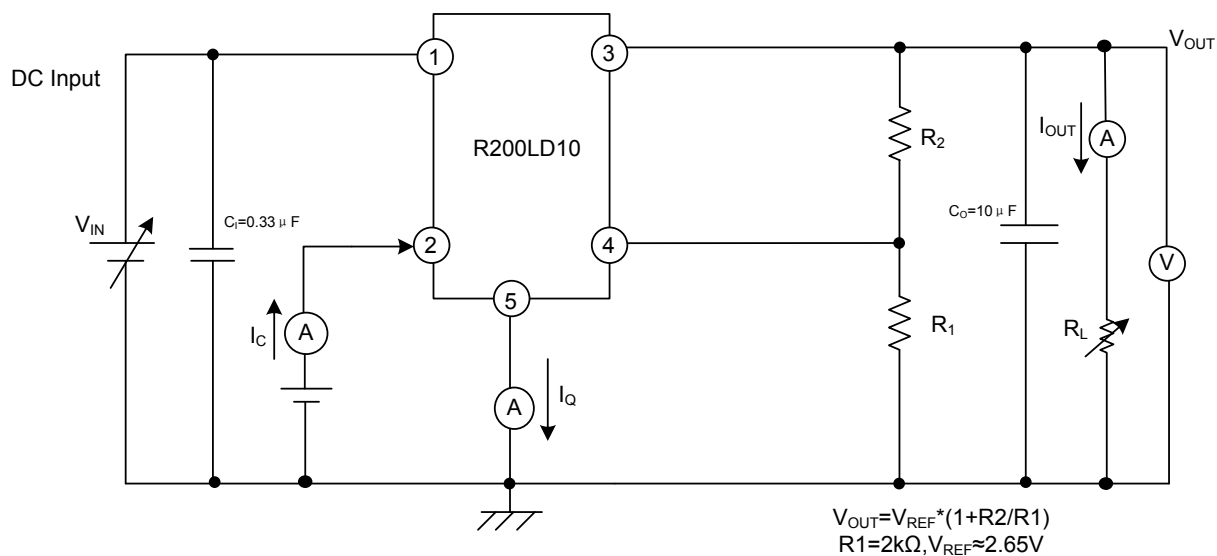







For Standard Measuring Circuit of Ripple Rejection Critical Rate

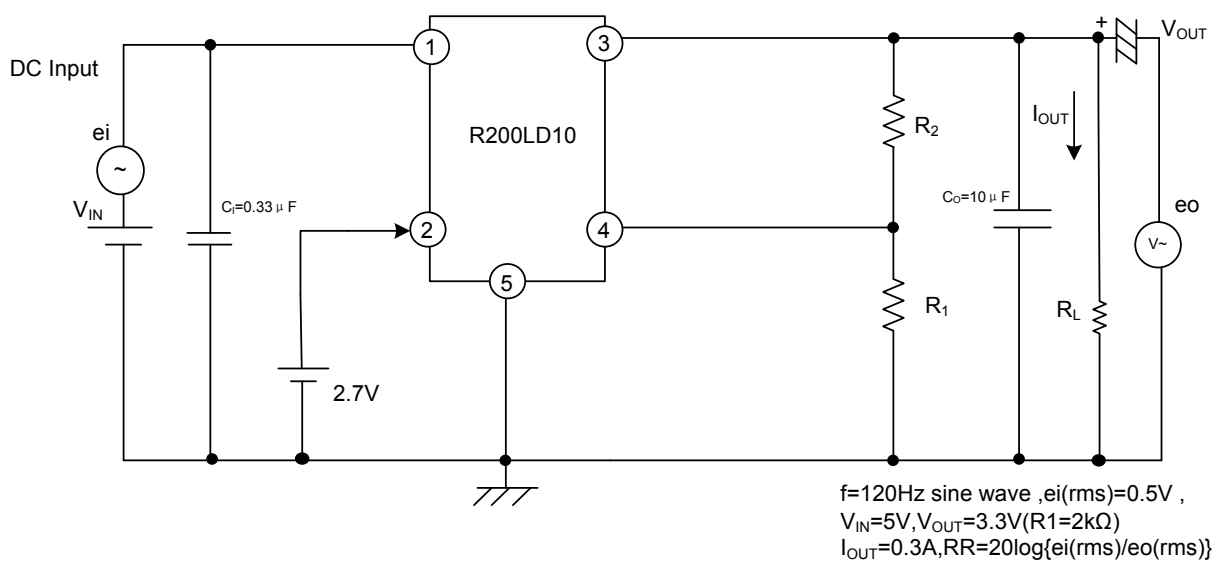

TYPICAL CHARACTERISTICS

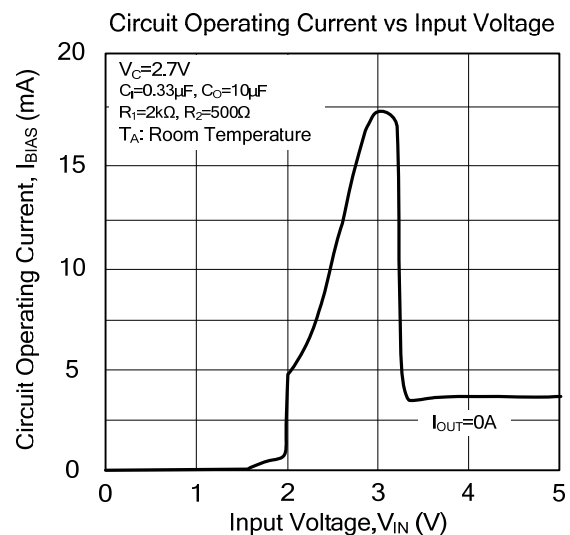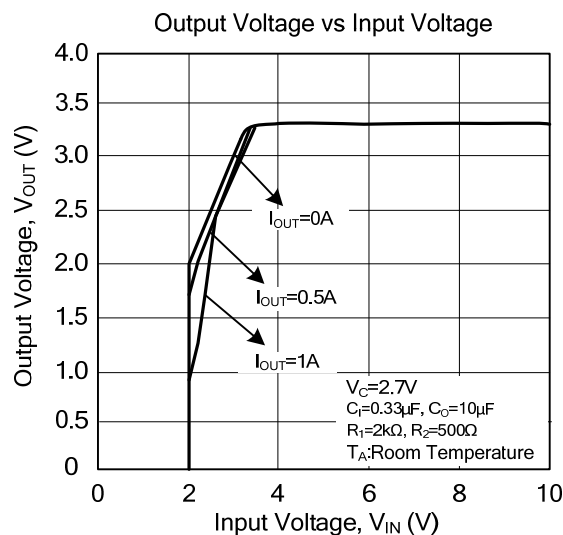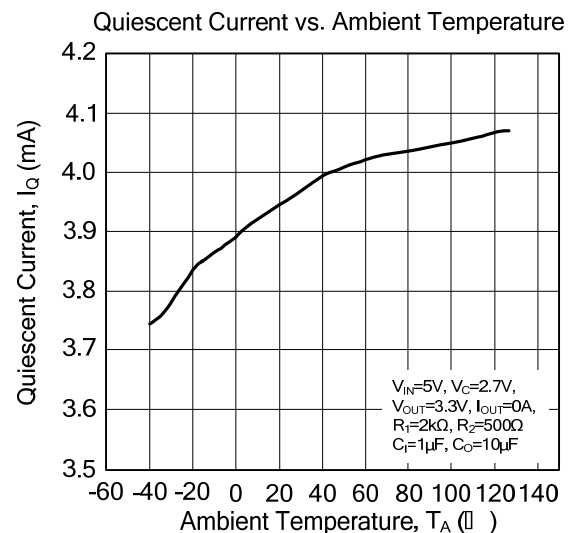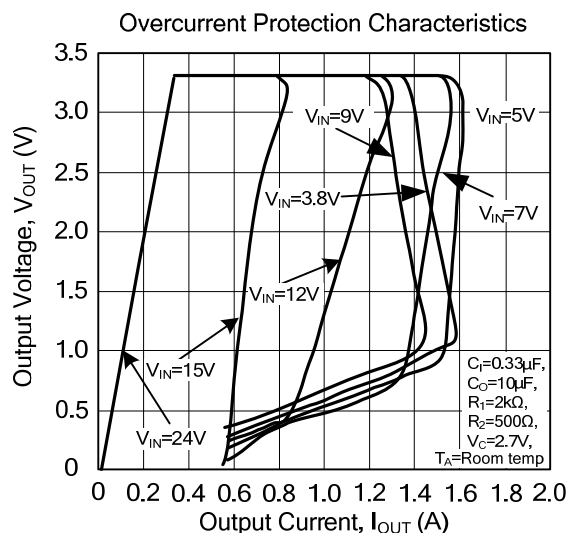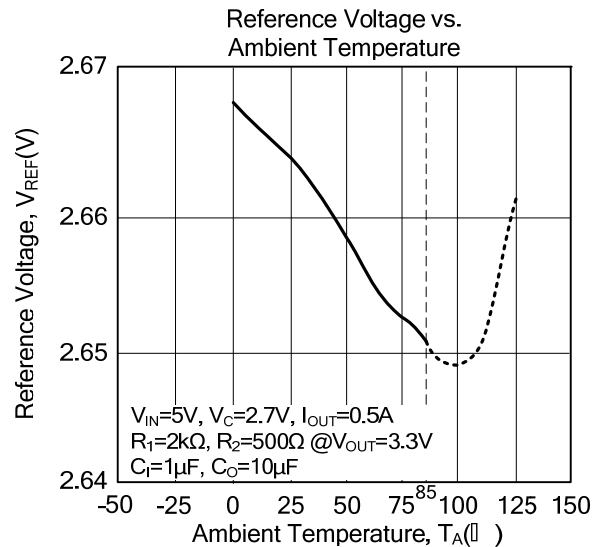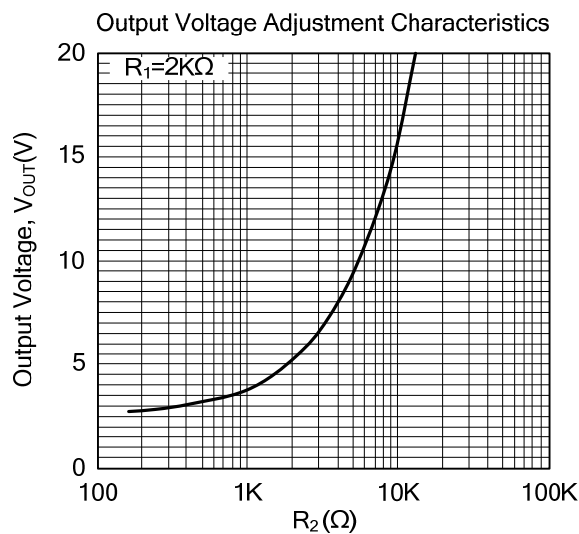

■ TYPICAL CHARACTERISTICS(Cont.)

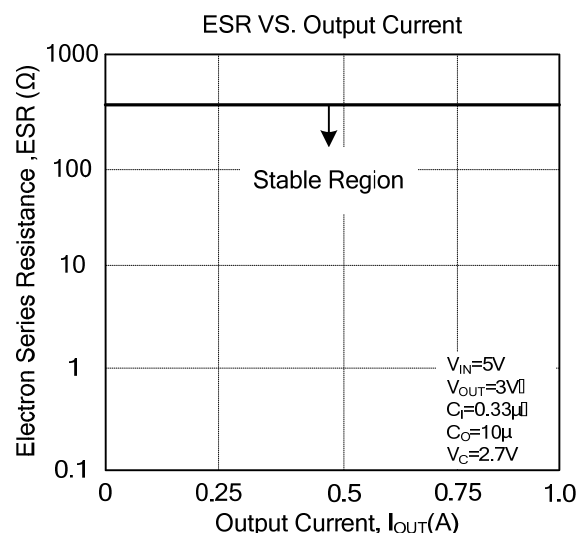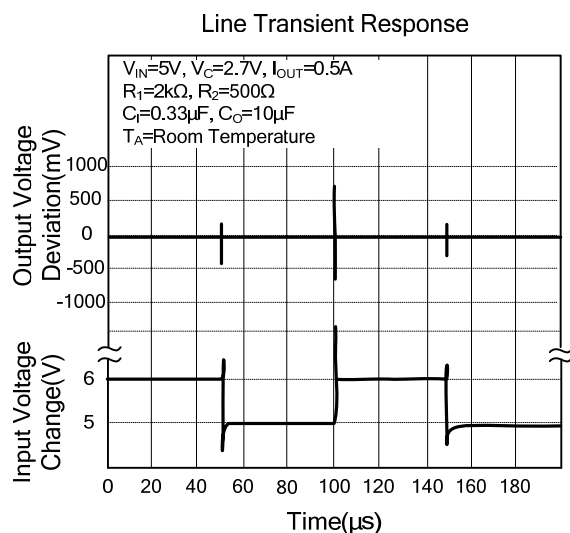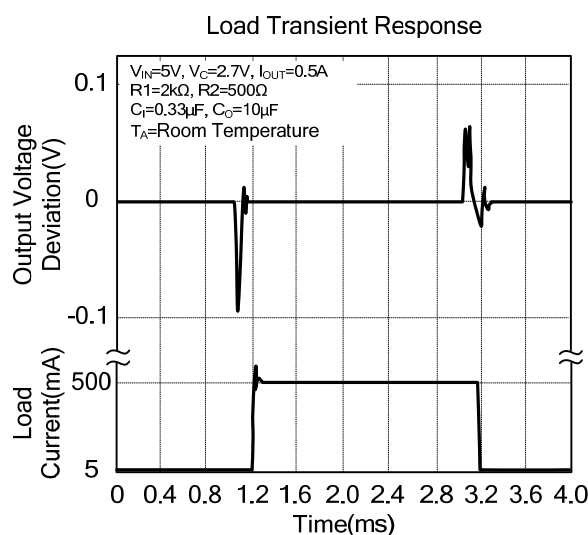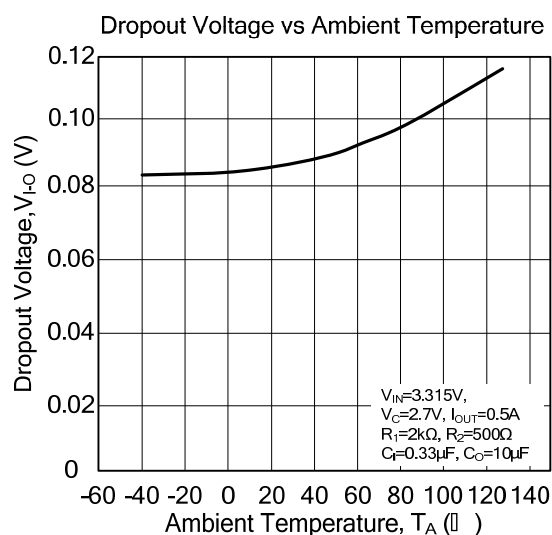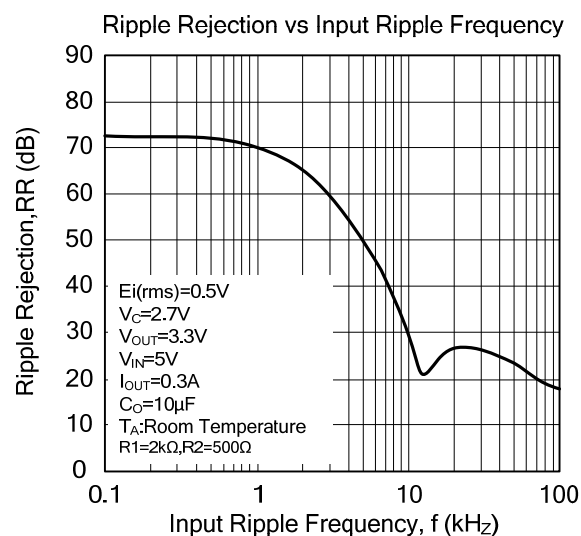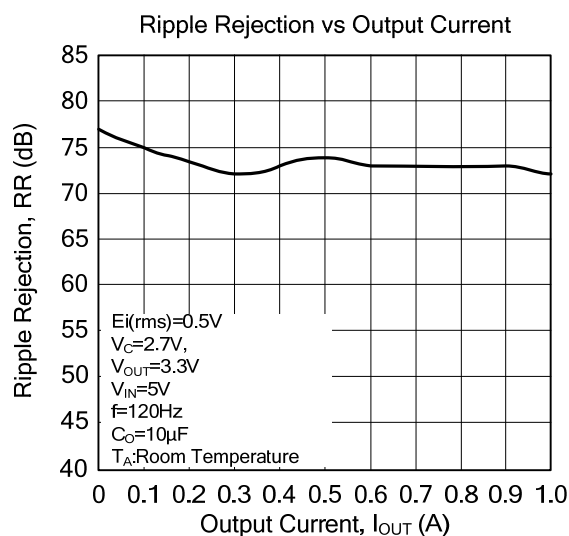

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.

