

● SPECIFICATIONS

PARAMETER	VALUE
NOMINAL FREQUENCY	32.768 kHz
FREQUENCY TOLERANCE AT 25°C, Max	±20 PPM
TURNOVER TEMPERATURE	25°C ± 5°C
PARABOLIC CURVATURE CONSTANT	-0.034 PPM/Δ°C ²
LOAD CAPACITANCE	12.5 pF
EQUIVALENT SERIES RESISTANCE, Max	35 kΩ
DRIVE LEVEL, Max	1.0 μW
SHUNT CAPACITANCE, typical	1.35 pF
AGING (FIRST YEAR)	±3 PPM FIRST YEAR MAX
QUALITY FACTOR	70000 TYPICAL
INSULATION RESISTANCE	500 MΩ MIN
OPERATING TEMPERATURE RANGE	-40°C to +85°C
STORAGE TEMPERATURE RANGE	-55°C to +125°C






Photo is not actual part

● MECHANICAL SPECIFICATION

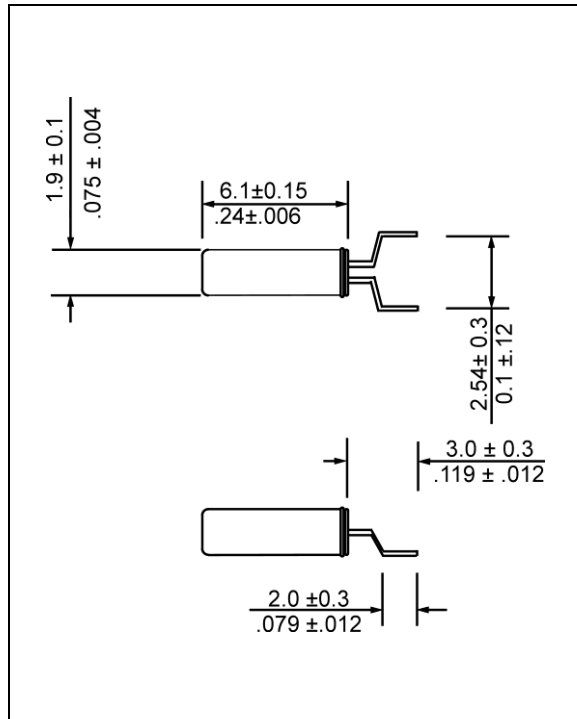

NOTE: Solder by terminals only max 245°C for ten seconds

● CARRIER TAPE DIMENSIONS

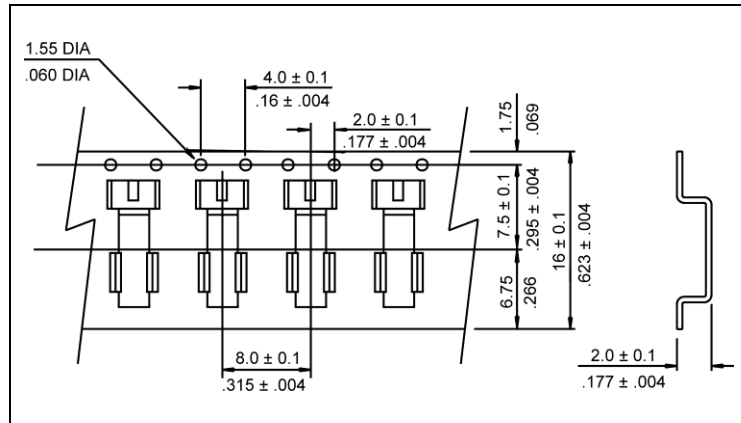


NOTE: REFER TO EIA-481 FOR DIMENSIONS

● PACKAGING

330 mm REEL DIAMETER
16 mm TAPE WIDTH, 8 mm PITCH
QUANTITY: 2000 PIECES PER REEL

IN ACCORDANCE WITH EIA-481

REFLOW PROFILE

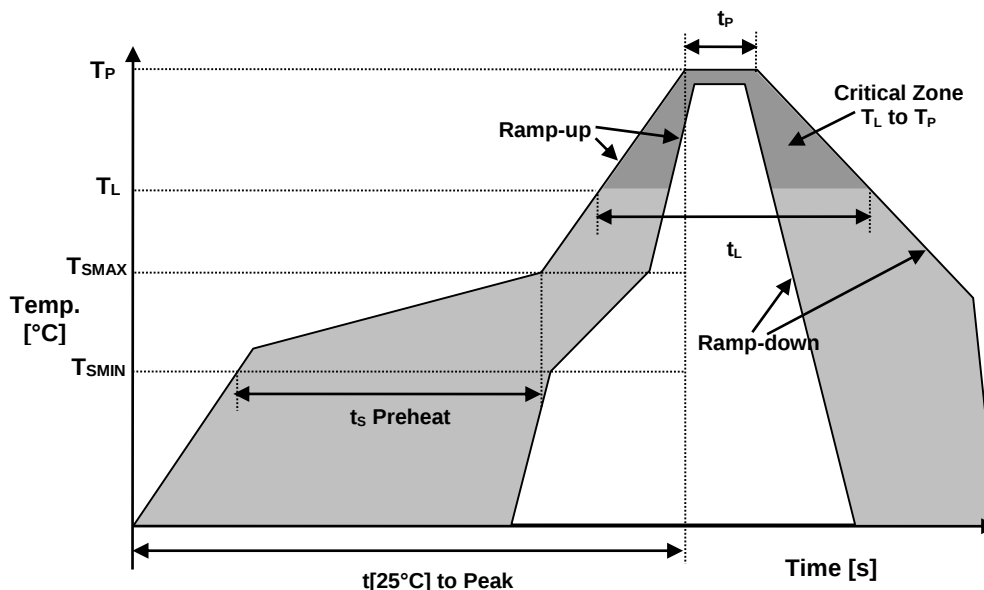

Reflow profile		
Temperature Min Preheat	T _{SMIN}	150°C
Temperature Max Preheat	T _{SMAX}	200°C
Time (T _{SMIN} to T _{SMAX})	t _s	60-180 sec.
Temperature	T _L	217°C
Peak Temperature	T _P	245°C
Ramp-up rate	R _{UP}	3°C/s max.
Ramp-down rate	R _{DOWN}	6°C/s max.
Time within 5°C of Peak Temperature	t _p	10 s
Time t[25°C] to Peak Temperature	t[25°C] to Peak	480 s
Time	t _L	60-150 s

ENVIRONMENTAL

PARAMETER	VALUE
MOISTURE SENSITIVITY LEVEL	1
RoHS-2	5/6 COMPLIANT, EXEMPTION 7a
REACH SVHC	COMPLIANT
HALOGEN-FREE	COMPLIANT
ESD CLASSIFICATION LEVEL	N/A
TERMINATION FINISH	Sn





A **RAMI TECHNOLOGY** Company

TUNING FORK CRYSTAL

Page 3 of 3

R26-32.768-12.5-EXT-SMD-TR

• MARKING

x3FmyR

x – Internal Production ID code

m – Month code

y – Year code

YEAR CODE	
Year	Code
2011	1
2012	2
2013	3
2014	4
2015	5
2016	6
2017	7
2018	8
2019	9

MONTH CODE	
MONTH	CODE
JANUARY	A
FEBRUARY	B
MARCH	C
APRIL	D
MAY	E
JUNE	F
JULY	G
AUGUST	H
SEPTEMBER	J
OCTOBER	K
NOVEMBER	L
DECEMBER	M

• APPROVAL

DRAWN BY:	KJackson, March 4, 2016
APPROVED BY:	KJackson, March 4, 2016
REVISION:	A, New Format Release