
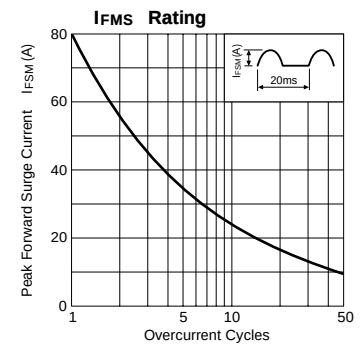
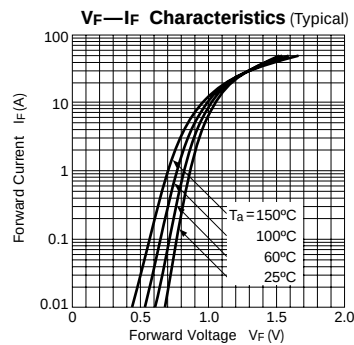


Bridge Diodes




Parameter Type No.	Absolute Maximum Ratings					Electrical Characteristics (Ta=25°C)				Others		
	V _{RM} (V)	I _{F(AV)} (A) With Heatsink	I _{FSM} (A)	T _J (°C)	Tstg (°C)	V _F (V)		I _R (μA)	I _R (H) (μA)	R _{th} (j-c)	Mass	Fig.
			50Hz Half-cycle Sinewave Single Shot			max per element	I _F (A)	V _R =V _{RM} max per element	V _R =V _{RM} , T _J =100°C max per element	(°C/W)	(g)	
RBV-401	100	4.0	80	-40 to +150		1.05	2.0	10	100	5.0	4.05	Ⓐ
RBV-402	200					1.10						
RBV-404	400											
RBV-406	600											
RBV-408	800		100			1.00						
RBV-40C	1000											
RBV-406M	600		120			0.92						
*RBV-406H	600								1.00			

★RBV-406H trr 5.0μs




RBV-401, 402



RBV-404, 406

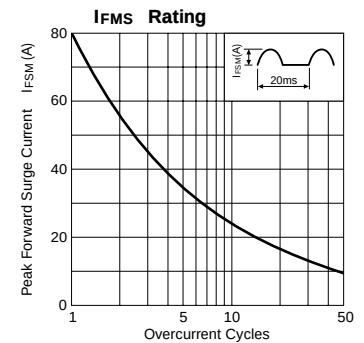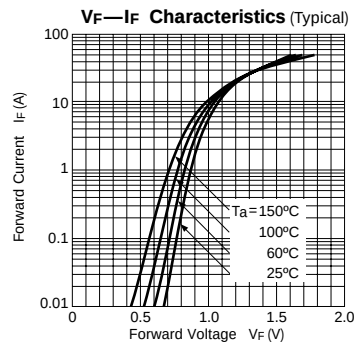

RBV-408, 40C

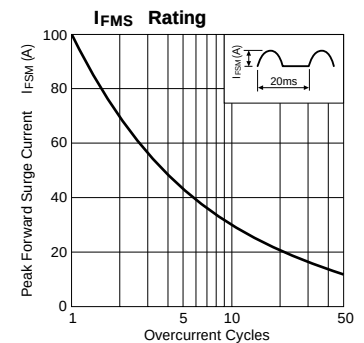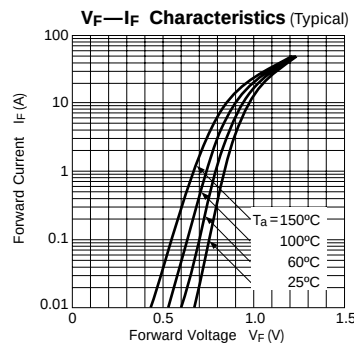






External Dimensions

(Unit: mm)

Flammability:
UL94V-0 or Equivalent

Fig. Ⓐ

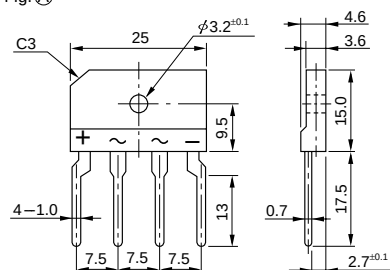

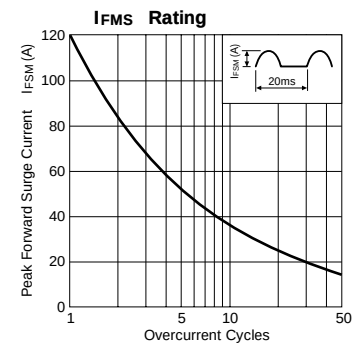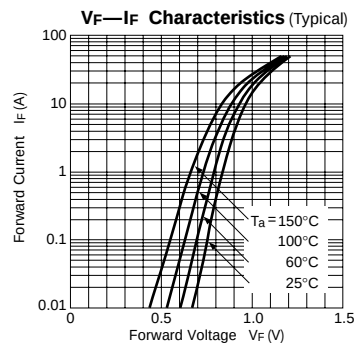RBV-406M**RBV-406H**