
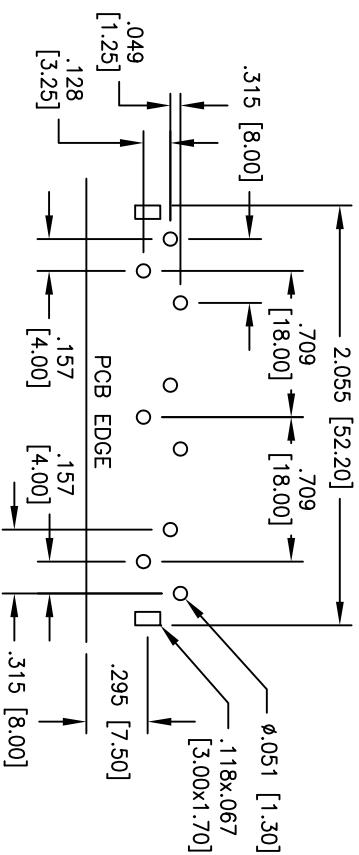
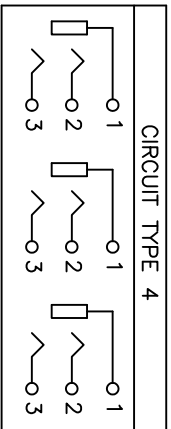
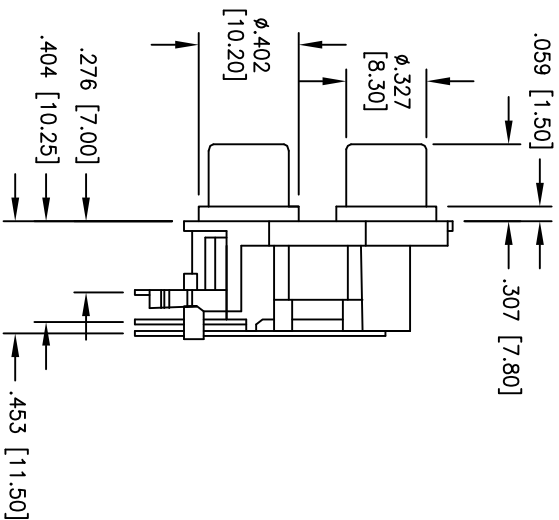


Rev	AWO #	Description	Date	Appr
-		RELEASED	10/21/09	

APPROVED: _____

DATE: _____ TITLE: _____

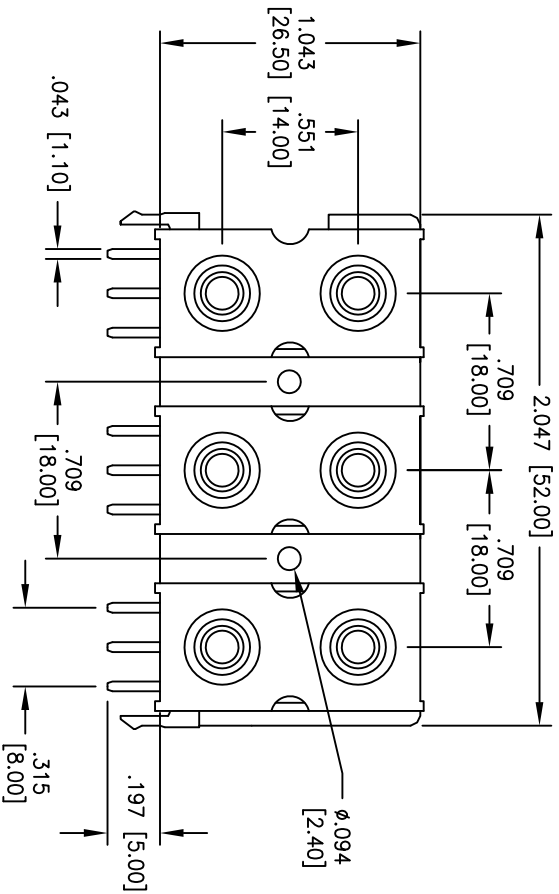

SPECIFICATIONS:

Material:

Insulator: PBT, Glass reinforced, rated UL 94V-0

Insulator color: Black

Inserts: PBT, Color Black

Bushing: Brass, Nickel plated

Contacts: Brass

Plating:

Tin or Silver over Copper underplate

Electrical:

Operating voltage: 12 VDC max.

Current rating: 1 Amp max.

Contact resistance: 30 mohms max. initial

Insulation resistance: 100 Mohms min.

Dielectric withstanding voltage: 500 VAC for 1 minute

Temperature Rating:

Operating temperature: -25°C to +85°C

Environmental:

Lead free, RoHS Compliant

Recommended soldering temp: 235°C for 5 seconds



ADAM TECH

909 Railway Avenue, Union, NJ 07083

Phone: 908-687-5000 Fax: 908-687-5710

RCA JACK, 6 PORTS, 2 X 3, LEFT/CENTER/RIGHT

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED				HOLE SIZES			
.X	± .10	ØXX	± .10	.X	± .10	ØXX	± .10
.XX	± .020	ØXX	± .015	.XX	± .020	ØXX	± .015
.XXX	± .015	ØXXX	± .010	.XXX	± .015	ØXXX	± .010
APPROVALS				DATE			
DRAWN	DY			10/21/09			
CHECKED							
APPROVED							
TITLE				REV.			
RCA JACK, 6 PORTS, 2 X 3, LEFT/CENTER/RIGHT				-			
SIZE				PART NO.			
X				RCA-11-4-B/B/B			
REF.				SCALE: NTS			
				SHEET 1 OF 1			