




Features

- Line to Line and Line to Ground combined protection.
- UL, CSA and CE safety approvals.
- Surge protection for both Single and Three-Phase applications.
- Compact size.





Safety Agency : Standard		File No., Report No.
UL	UL1449	E143446
CSA	C22.2 No.8	
TÜV	EN60099-1/A1:1999	J2150288


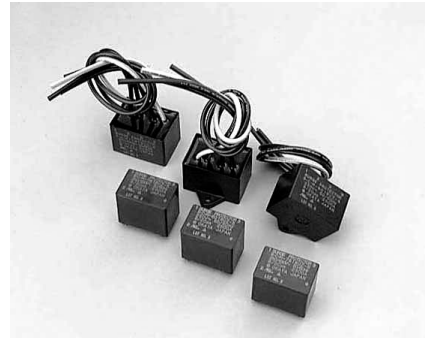


Rated Voltage

- Y connection



- Δ connection



Y connection— Single-Phase 430Vrm (L to L) : R • C • M-781BQZ-4
 Three-Phase 430Vrm (L to L) : R • C • M-781BUZ-4
 Three-Phase 500Vrm : R • C • M-801BUZ-4

Δ connection— Single-Phase 250Vrm : R • C • M-781BQZ-4
 Three-Phase 250Vrm : R • C • M-781BUZ-4
 Three-Phase 290Vrm : R • C • M-801BUZ-4

	Single-Phase series		Three-Phase series	
	Wire type	Lead type	Wire type	Lead type
601	RCM-601BQZ-4	RCM-601BQZ-5	RCM-601BUZ-4	RCM-601BUZ-5
781	RCM-781BQZ-4	RCM-781BQZ-5	RCM-781BUZ-4	RCM-781BUZ-5
801			RCM-801BUZ-4	RCM-801BUZ-5

Electrical Specifications

Model Number	Rated Voltage (V)	Power Frequency Sparkover Voltage (Ua)	Nominal Discharge Current (ins) 8/20μs	Impulse Sparkover Voltage(us) 1.2/50μs	Max. Impulse Sparkover Voltage (usa) 10kV/μs	Max. Residual Voltage (ur) 8/20μs (2500A)	Surge Current Life 8/20μs (500A)	Max. Peak Surge Current 8/20μs
RCM-601BQZ-4/5 (Single-Phase)	250	AC560V ±20%	2500A	2kV	3kV	2kV	300 times	5000A
RCM-601BUZ-4/5 (Three-Phase)	250							
RCM-781BQZ-4/5 (Single-Phase)	430	AC700V ±20%	2500A	2kV	3kV	2kV		
RCM-781BUZ-4/5 (Three-Phase)	250/430							
RCM-801BUZ-4/5 (Three-Phase)	290/500	AC800V ±20%	2500A	2.32kV	3.48kV	2.32kV		

*RCM-XXX-4: Wire type
 RCM-XXX-5: Lead type

		BQZ Series (Single-Phase)	BUZ Series (Three-Phase)
Dimensions	Wire terminal type (-4)		
	Solder lead type (-5)	Tolerances: ± 1.0 A: *1, *2 tolerance ± 0.5	Tolerances: ± 1.0 A: *1, *2 tolerance ± 0.5
Circuit			