

Features

Regulated Converters

- 3W DIP Package Isolated Dual Outputs Vout1 / Vout2
- Input / Output 2KVDC Isolation min.
- UL94V-0 Package Material
- Continuous Short Circuit Protection Auto-Restarting (V1)
- Wide Input 2:1
- Internal SMD design
- 100% Burned In

Selection Guide

Part Number	Input Voltage (VDC)	Output Voltage Vout1 (VDC)	Output Current at Vout1 (mA)	Output Voltage Vout2 (VDC)	Output Current at Vout2 (mA)
DIP24					
REC3-050505DRWI/A	4.5-9	5	300*	5	300
REC3-050509DRWI/A	4.5-9	5	300*	9	167
REC3-050512DRWI/A	4.5-9	5	300*	12	125
REC3-050515DRWI/A	4.5-9	5	300*	15	100
REC3-120505DRWI/A	9-18	5	300*	5	300
REC3-120509DRWI/A	9-18	5	300*	9	167
REC3-120512DRWI/A	9-18	5	300*	12	125
REC3-120515DRWI/A	9-18	5	300*	15	100
REC3-240505DRWI/A	18-36	5	300*	5	300
REC3-240509DRWI/A	18-36	5	300*	9	167
REC3-240512DRWI/A	18-36	5	300*	12	125
REC3-240515DRWI/A	18-36	5	300*	15	100
REC3-480505DRWI/A	36-72	5	300*	5	300
REC3-480509DRWI/A	36-72	5	300*	9	167
REC3-480512DRWI/A	36-72	5	300*	12	125
REC3-480515DRWI/A	36-72	5	300*	15	100

* V1 min. load 100mA to supply V2 well

* add suffix "M" for Metal Case, e.g. REC3-240505DRWI/AM

For alternative custom output voltage and power combinations, please contact Recom Technical Support

Specifications (Core Operating Area)

Input Voltage Range	2:1	
Output Voltage Accuracy	±2% max.	
Line Voltage Regulation	±0.4% max.	
Load Voltage Regulation (10% to 100% full load)	±0.6% max.	
Output Ripple and Noise (at 20MHz BW)	50mVp-p max.	
Operating Frequency	100kHz typ.	
No Load Power Consumption	300mW max.	
Isolation Voltage	Input / Output (tested for 1 second)	2000VDC min.
	Vout1 / Vout2 (tested for 1 second)	500VDC min.
Rated Working Voltage	(long term isolation)	see Application Notes
Isolation Capacitance	40pF typ.	
Isolation Resistance	1 GΩ min.	
Short Circuit Protection (V1)	Continuous	
Operating Temperature Range	Vin=5V	-40°C to +80°C (see Graph)
(free air convection)	Vin=12, 24, 48V	-40°C to +85°C (see Graph)
Storage Temperature Range	-55°C to +125°C	


continued on next page

ECONOLINE

DC/DC-Converter

REC3-DRWI/A Series

**3 Watt
DIP24
Isolated
Dual Output**





**EN-60950-1 Certified
EN-60601-1 Certified
UL-60950-1 Certified**



Specifications (Core Operating Area)




Relative Humidity			95% RH
Case Material			Non-Conductive Plastic
Thermal Impedance		Natural convection	20°C/W for metal case
Package Weight			13g
MTBF (+25°C)	Detailed Information see	using MIL-HDBK 217F	877 x 10 ³ hours
(+80°C)	Application Notes chapter "MTBF"	using MIL-HDBK 217F	138 x 10 ³ hours

Derating-Graph (Ambient Temperature)

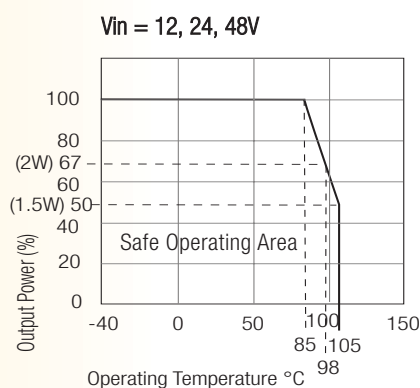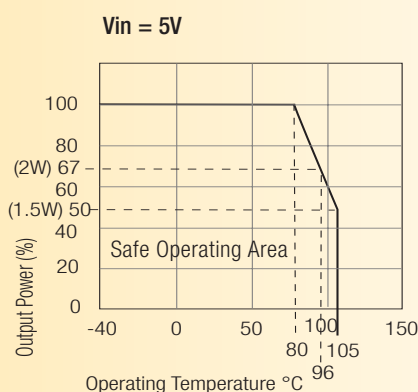


Package Style and Pinning (mm) Wide Input 2:1

24 PIN DIP Package

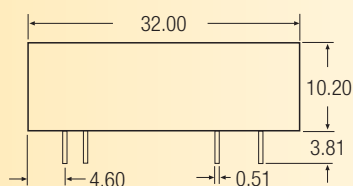

Recommended Footprint Details

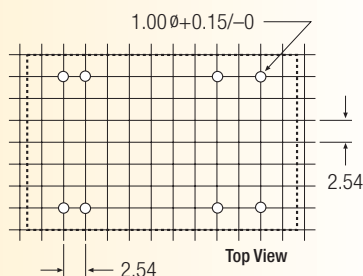

Pin Connections

Pin #	Dual
2	-V _{in}
3	-V _{in}
9	+V _{out} 2
11	-V _{out} 2
14	+V _{out} 1
16	-V _{out} 1
22	+V _{in}
23	+V _{in}

NC = No Connection

XX.X ± 0.5 mm

XX.XX ± 0.25 mm