Features

Unregulated Converters

- 1:1 Input Range
- Low Cost 1W Converter
- Efficiency to 76%
- -40°C to +85°C Operating Temperature Range
- UL Certified

ECONOLINE
DC/DC-Converter
with 3 year Warranty

RECOM

Selection Guide

Part Number SMD	Input Voltage (VDC)	Output Voltage (VDC)	Output Current (mA)	Efficiency (typ.)
REE-0505S	5	5	200	76%

1 Watt SIP7 Single Output

Specifications (measured at T_A = 25°C, nominal input voltage, full load and after warm-up)

Input Voltage Range		±10% max.
Output Voltage Accuracy		-2% typ., ±5% max.
Line Voltage Regulation	(low line to high line at max. load)	1.2%/1% of Vin typ.
Load Regulation	20% to 100% load (5V output)	10% max.
Output Ripple and Noise (20MHz BW limited)		55mVp-p typ. / 100mVp-p max.
Operating Frequency (Vin=nominal input)		50kHz min. / 82kHz typ. / 105kHz max.
Efficiency		76% typ. / 70% min.
Isolation Test Voltage	(tested for 1 second)	1000 VDC min.
	(rated for 1 minute*)	500VAC / 60Hz
Isolation Capacitance		75pF max.
Isolation Resistance	(Viso=500V)	1GΩ min.
Short-Circuit Protection		1 sec.
Operating Temperature Range		-40°C to +85°C
Storage Temperature		-55°C to +125°C
Relative Humidity		95% RH
Package Weight		2.2g
MTBF (+25°C) *Detailed Information see Application Notes chapter "MTBF"*	using MIL-HDBK 217F	2400 x 10^3 hours
MTBF (+85°C)	using MIL-HDBK 217F	650 x 10^3 hours
Certification		
UL General Safety	Report: E358085-A4 UL60950-1	

*Any data referred to in this datasheet are of indicative nature and based on our practical experience only. For further details, please refer to our Application Notes.




RoHS 2011/65/EU 6/6

E-358085

UL-60950-1 Certified

REE


Derating-Graph
(Ambient Temperature)

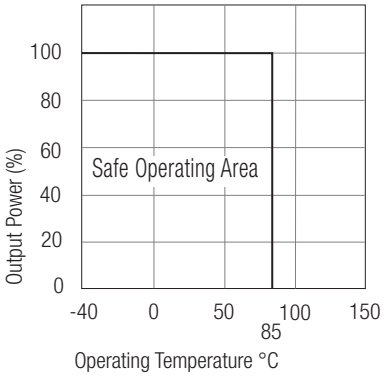

Refer to Application Notes


Typical Characteristics


Tolerance Envelope

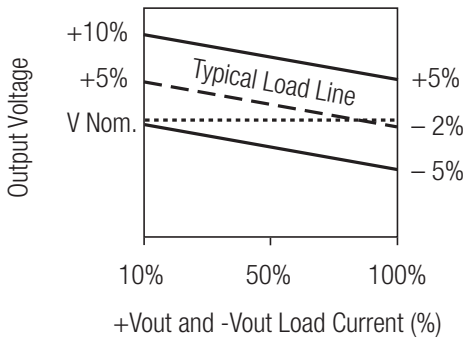

Typical Characteristics


REE-0505S

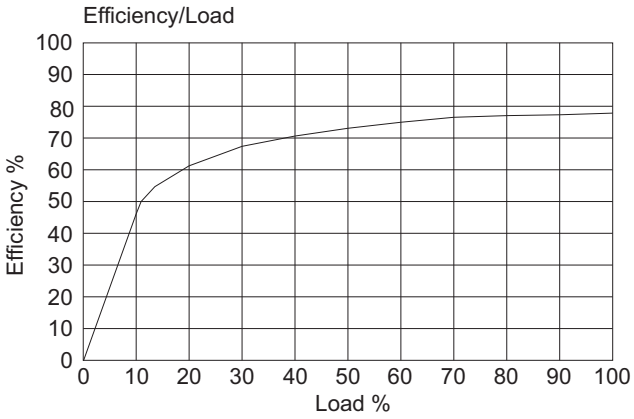


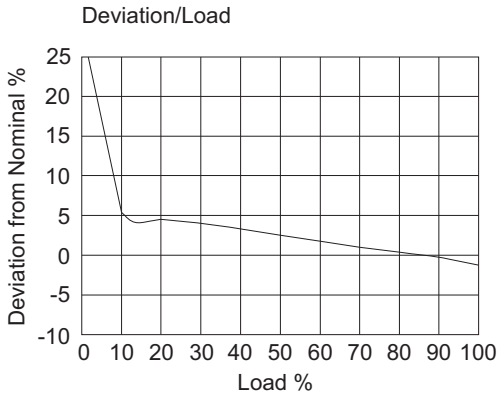

Package Style and Pinning


Single SIP 7PIN Package

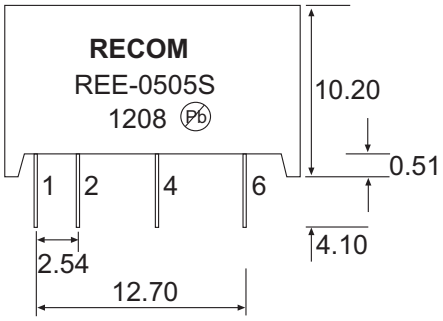


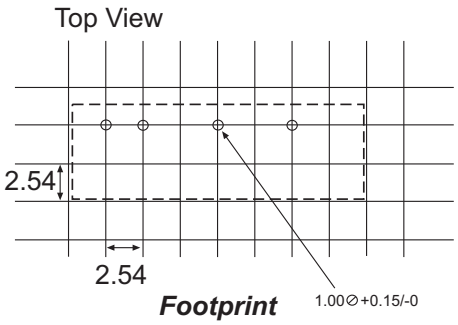

Pin Connections	
Pin #	**Function**
1	+Vin
2	-Vin
4	-Vout
6	+Vout

Unit: mm
Tolerance: ± 0.25 mm

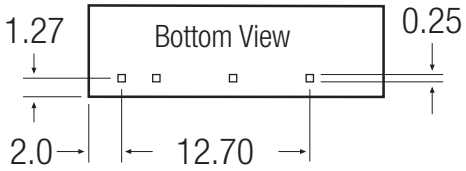

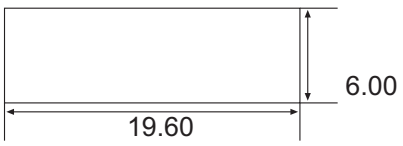

REE

The product information and specifications are subject to change without prior notice. RECOM products are not authorized for use in safety-critical applications (such as life support) without RECOM's explicit written consent. A safety-critical application is defined as an application where a failure of a RECOM product may reasonably be expected to endanger or cause loss of life, inflict bodily harm or damage property. The buyer shall indemnify and hold harmless RECOM, its affiliated companies and its representatives against any damage claims in connection with the unauthorized use of RECOM products in such safety-critical applications.