
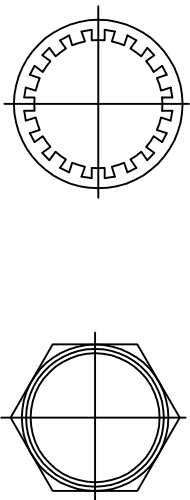


Rev	AWO #	Description	Date	Appr
-		RELEASED	12/27/05	


APPROVED: _____

DATE: _____ TITLE: _____

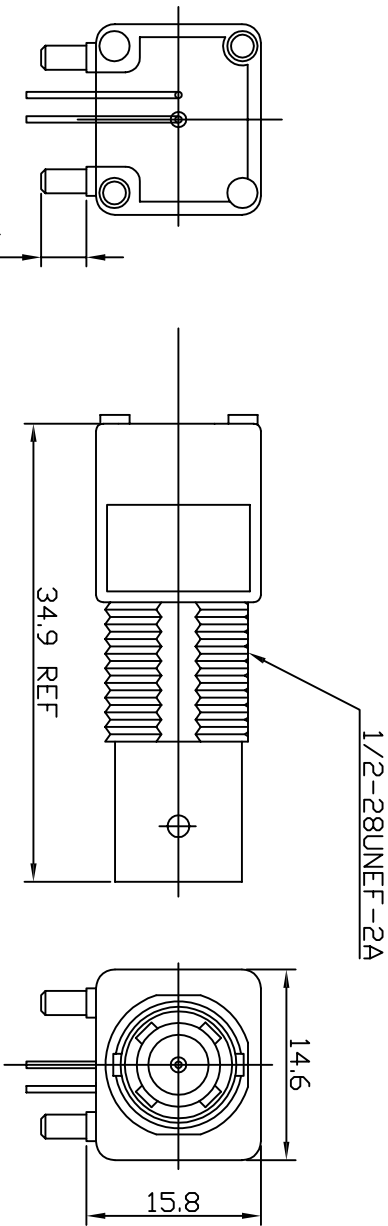


LOCK WASHER

1/2-28 UNEF-2B
CLAMP NUT



RECOMMENDED MOUNTING HOLE
MAXIMUM PANEL THICKNESS: 5.5MM
RECOMMENDED MOUNTING TORQUE:
12 INCH-POUNDS MAX

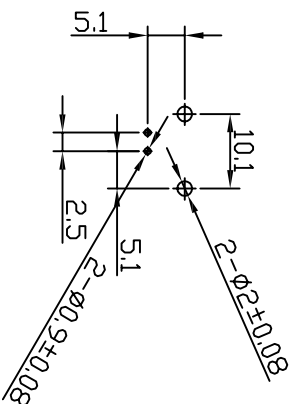

7	NUT	BRASS	NICKEL	
6	WASHER	IRON	NICKEL	1
5	PIN	COPPER	TIN	1
4	PIN	COPPER	TIN	1
3	INSULATOR	POM	NONE	1
2	BODY	ZINC ALLOY	NICKEL	1
1	CENTER CONTACT	PHOSPHOR BRONZE	GOLD	1
ND	DESCRIPTION	MATERIAL	FINISH	QTY

SPECIFICATIONS:
Environmental:
Lead free, RoHS compliant.
Recommended soldering temp: 260° for 5 sec.



ADAM TECH

909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-0214

TITLE
RF CONNECTOR, TYPE BNC, HI-TEMP
RIGHT ANGLE, PCB, 75 OHM,

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE MM [INCHES] TOLERANCES: EXCEPT AS NOTED			
.X .XX .XXX	± .10 ± .020 ± .015	ØXX ØXXX ØXXX	± .10 ± .015 ± .010
APPROVALS	DATE		
DRAWN	SLS	12/27/05	
CHECKED			
APPROVED			
SIZE	PART NO.	REV.	
X	RF1-01A-D-00-75-M-HT	-	
REF:	SCALE: NTS	SHEET 1 OF 1	