
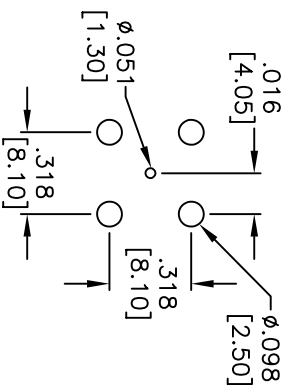



Rev	AWO #	Description	Date	Appr
-	7959	RELEASED	7/12/07	

APPROVED: _____

DATE: _____ TITLE: _____

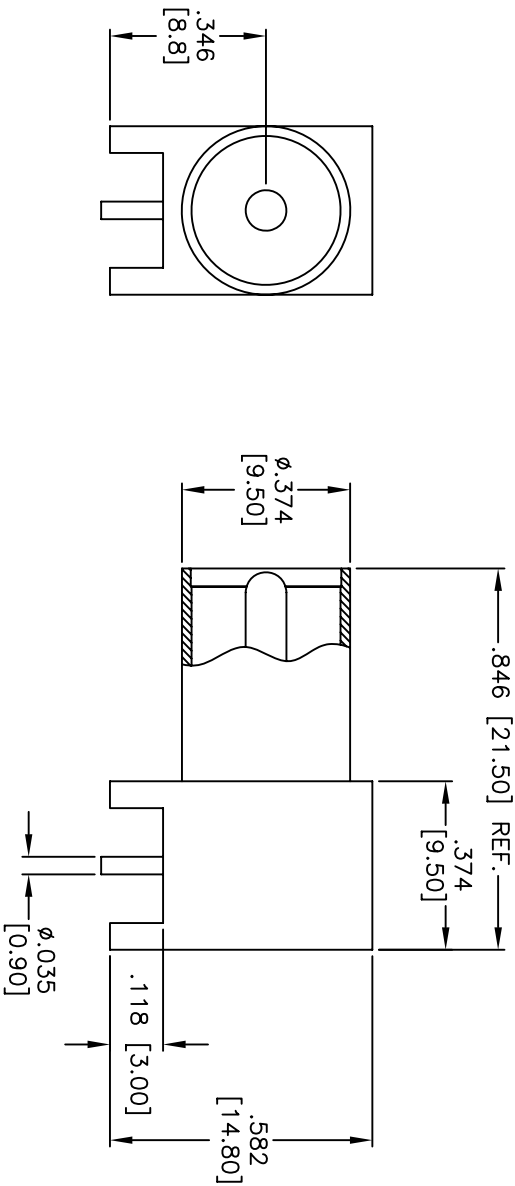

RECOMMENDED
PCB LAYOUT

SPECIFICATIONS:

Material:

Body: Brass, Nickel plated

Pin: Brass, Nickel plated

Dielectric: Teflon

Electrical:

Nominal Impedance: 75 ohms

Frequency range: 0—4 GHz

Maximum peak voltage: 500V

Insulation resistance: 5000 Mohm min @ 500 VDC

Dielectric withstanding voltage: 1500 VAC rms

Environmental:

Lead free, RoHS compliant.

Recommended soldering temp: 235° for 5 sec.

RoHS
COMPLIANT

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-0214

PAL CONNECTOR, MALE, R/A
PCB MOUNT, 75 OHM

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE MM [INCHES] TOLERANCES: EXCEPT AS NOTED				TITLE			
INCHES				Holes			
.X	± .10	ØX	± .10	.X	± .10	ØX	± .10
.XX	± .020	ØXX	± .015	.XX	± .020	ØXX	± .015
.XXX	± .015	ØXXX	± .010	.XXX	± .015	ØXXX	± .010
APPROVALS				DATE			
DRAWN	SS		7/12/07	SIZE	PART NO.	REV.	
CHECKED				X	RF34-01-T-00-75	-	
APPROVED				REF:	SCALE: NTS	SHEET 1 OF 1	