RFMD
rfmd.com

RFHA1000

50MHz TO 1000MHz, 15W GaN WIDEBAND POWER AMPLIFIER

Package: AlN Leadless Chip Carrier / SO8




Features

- Advanced GaN HEMT Technology
- Output Power of 15W
- Advanced Heat-Sink Technology
- 50MHz to 1000MHz Instantaneous Bandwidth
- Input Internally Matched to 50Ω
- 28V Operation Typical Performance
  - Output Power 41.5dBm
  - Gain 17dB
  - Power Added Efficiency 60%
- -40°C to 85°C Operating Temperature
- Large Signal Models Available

Applications

- Class AB Operation for Public Mobile Radio
- Power Amplifier Stage for Commercial Wireless Infrastructure
- General Purpose Tx Amplification
- Test Instrumentation
- Civilian and Military Radar

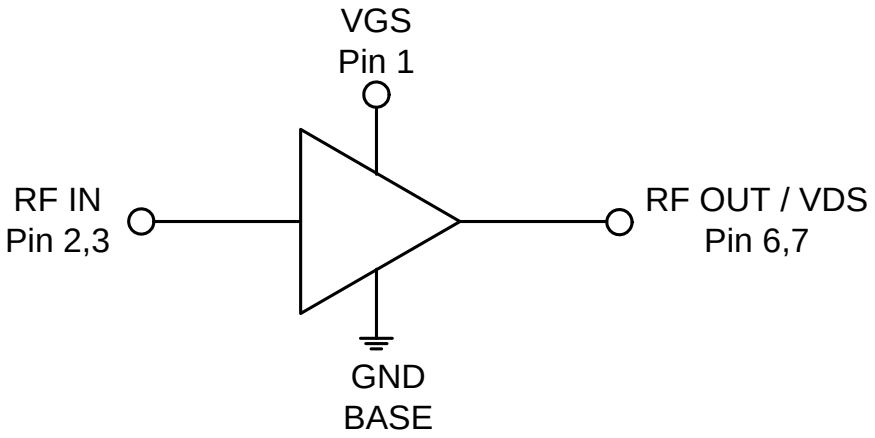

Functional Block Diagram

Product Description

The RFHA1000 is a wideband Power Amplifier designed for CW and pulsed applications such as wireless infrastructure, RADAR, two way radios and general purpose amplification. Using an advanced high power density Gallium Nitride (GaN) semiconductor process, these high-performance amplifiers achieve high efficiency, flat gain, and large instantaneous bandwidth in a single amplifier design. The RFHA1000 is an input matched GaN transistor packaged in an air cavity ceramic package which provides excellent thermal stability through the use of advanced heat sink and power dissipation technologies. Ease of integration is accomplished through the incorporation of optimized input matching network within the package that provides wideband gain and power performance in a single amplifier. An external output match offers the flexibility of further optimizing power and efficiency for any sub-band within the overall bandwidth.

Ordering Information

RFHA1000S2	2-Piece sample bag
RFHA1000SB	5-Piece bag
RFHA1000SQ	25-Piece bag
RFHA1000SR	100 Pieces on 7" short reel
RFHA1000TR7	750 Pieces on 7" reel
RFHA1000PCBA-410	Fully assembled evaluation board 50MHz to 1000MHz; 28V operation

Optimum Technology Matching® Applied

☐ GaAs HBT	☐ SiGe BiCMOS	☐ GaAs pHEMT	☑ GaN HEMT
☐ GaAs MESFET	☐ Si BiCMOS	☐ Si CMOS	☐ BiFET HBT
☐ InGaP HBT	☐ SiGe HBT	☐ Si BJT	

RF MICRO DEVICES®, RFMD®, Optimum Technology Matching®, Enabling Wireless Connectivity™, PowerStar®, POLARIS™ TOTAL RADIO™ and UltimateBlue™ are trademarks of RFMD, LLC. BLUETOOTH is a trademark owned by Bluetooth SIG, Inc., U.S.A. and licensed for use by RFMD. All other trade names, trademarks and registered trademarks are the property of their respective owners. ©2012, RF Micro Devices, Inc.

7628 Thorndike Road, Greensboro, NC 27409-9421 · For sales or technical support, contact RFMD at (+1) 336-678-5570 or customerservice@rfmd.com.

RFMD
rfmd.com

Absolute Maximum Ratings

Parameter	Rating	Unit
Drain Voltage (V_D)	150	V
Gate Voltage (V_G)	-8 to +2	V
Gate Current (I_G)	10	mA
Operational Voltage	32	V
RF- Input Power	31	dBm
Ruggedness (VSWR)	12:1	
Storage Temperature Range	-55 to +125	°C
Operating Temperature Range (T_L)	-40 to +85	°C
Operating Junction Temperature (T_J)	200	°C
Human Body Model	Class 1C	
MTTF (T_J < 200°C, 95% Confidence Limits)*	3 x 10^6	Hours
Thermal Resistance, R_{TH} (junction to case) measured at T_C = 85 °C, DC bias only	6	°C/W

Caution! ESD sensitive device.

Exceeding any one or a combination of the Absolute Maximum Rating conditions may cause permanent damage to the device. Extended application of Absolute Maximum Rating conditions to the device may reduce device reliability. Specified typical performance or functional operation of the device under Absolute Maximum Rating conditions is not implied.

The information in this publication is believed to be accurate and reliable. However, no responsibility is assumed by RF Micro Devices, Inc. ("RFMD") for its use, nor for any infringement of patents, or other rights of third parties, resulting from its use. No license is granted by implication or otherwise under any patent or patent rights of RFMD. RFMD reserves the right to change component circuitry, recommended application circuitry and specifications at any time without prior notice.

RoHS (Restriction of Hazardous Substances): Compliant per EU Directive 2002/95/EC.

* MTTF - median time to failure for wear-out failure mode (30% I_{DSS} degradation) which is determined by the technology process reliability. Refer to product qualification report for FIT(random) failure rate.
Operation of this device beyond any one of these limits may cause permanent damage. For reliable continuous operation, the device voltage and current must not exceed the maximum operating values specified in the table on page two.
Bias Conditions should also satisfy the following expression: $P_{DISS} < (T_J - T_C)/R_{TH}$ J - C and $T_C = T_{CASE}$

Parameter	Specification			Unit	Condition
	Min.	Typ.	Max.		
Recommended Operating Conditions					
Drain Voltage (V_{DSQ})		28	32	V	
Gate Voltage (V_{GSQ})	-5	-3	-2	V	
Drain Bias Current		88		mA	
RF Input Power (P_{IN})			30	dBm	
Input Source VSWR			10:1		
RF Performance Characteristics					
Frequency Range	50		1000	MHz	Small signal 3dB bandwidth
Linear Gain		17.5		dB	P_{OUT} = 30dBm, 100MHz
Power Gain		14.5		dB	P3DB, 100MHz
Gain Flatness		3		dB	P_{OUT} = 30dBm, 50MHz to 1000MHz
Gain Variation with Temperature		-0.02		dB/ °C	
Input Return Loss (S_{11})			-10	dB	
Output Power (P_{3dB})		41.5		dBm	50MHz to 1000MHz
Power Added Efficiency (PAE)		60		%	50MHz to 1000MHz


7628 Thorndike Road, Greensboro, NC 27409-9421 · For sales or technical support, contact RFMD at (+1) 336-678-5570 or customerservice@rfmd.com.

Parameter	Specification			Unit	Condition
	Min.	Typ.	Max.		
RF Functional Tests					[1], [2]
$V_{GS(Q)}$		-3		V	
Gain	14.8	16		dB	P_{IN} = 10dBm
Power Gain	13.2	14.3		dB	P_{IN} = 27dBm
Input Return Loss		-12	-10	dB	
Output Power	40.2	41.3		dBm	
Power Added Efficiency (PAE)	46	53		%	


[1] Test Conditions: V_{DSQ} = 28V, I_{DQ} = 88mA, CW, f = 500MHz, T = 25°C.
[2] Performance in a standard tuned test fixture.

Typical Performance in Standard Fixed Tuned Test Fixture Matched for 50MHz to 1000MHz (T = 25°C, unless noted)


Small Signal s-parameters versus Frequency
(V_D = 28V, I_{DQ} = 88mA)

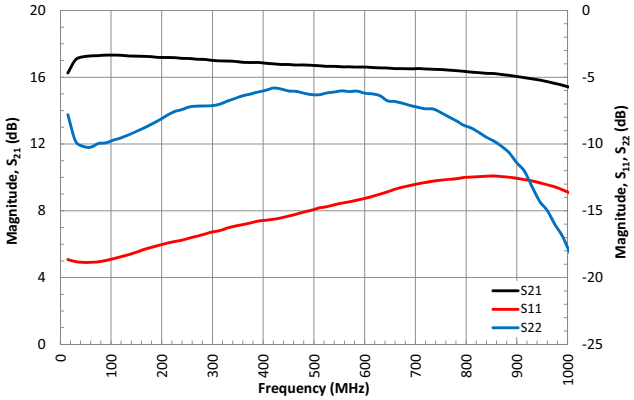


Gain versus Frequency, P_{IN} = 27dBm
(CW , V_D = 28V, I_{DQ} = 88mA)

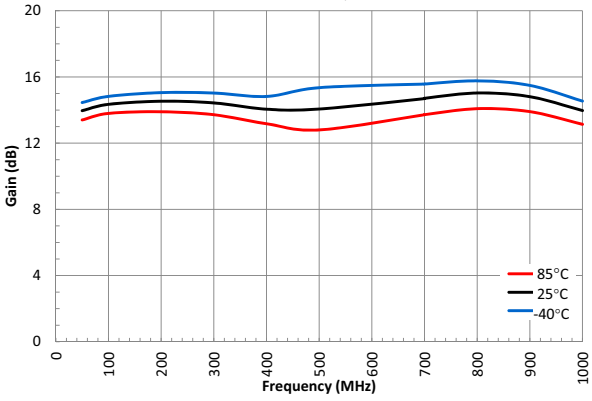


PAE versus Frequency, P_{IN} = 27dBm
(CW, V_D = 28V, I_{DQ} = 88mA)

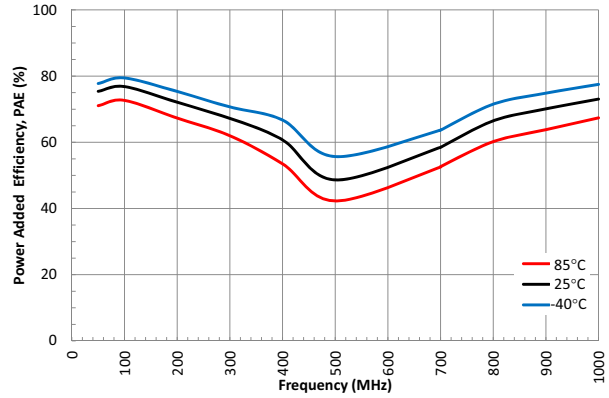


Input Return Loss versus Frequency, P_{IN} = 27dBm
(CW, V_D = 28V, I_{DQ} = 88mA)

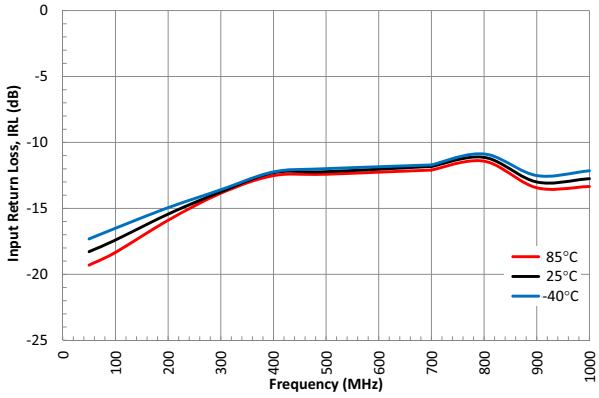

Gain/IRL versus Frequency, P_{OUT} = 41dBm
(CW, V_D = 28V, I_{DQ} = 88mA)

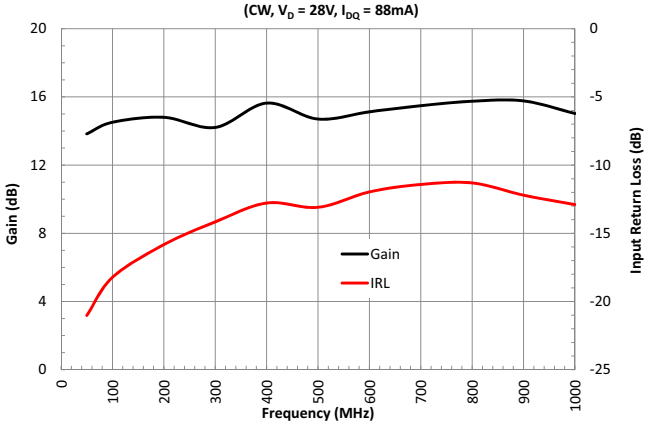


PAE versus Frequency, P_{OUT} = 41dBm
(CW, V_D = 28V, I_{DQ} = 88mA)

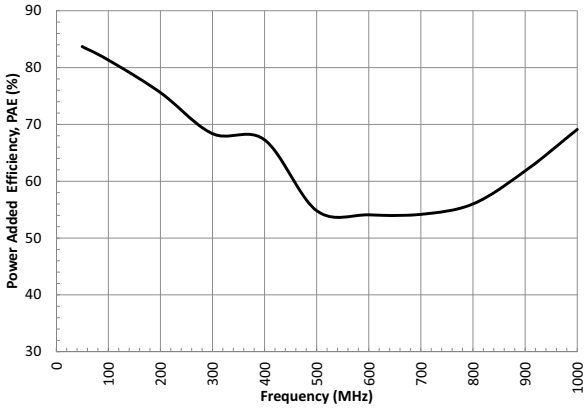


7628 Thorndike Road, Greensboro, NC 27409-9421 · For sales or technical support, contact RFMD at (+1) 336-678-5570 or customerservice@rfmd.com.

Typical Performance in Standard Fixed Tuned Test Fixture Matched for 50MHz to 1000MHz (T = 25°C, unless noted)


Gain versus Frequency
(CW, V_D = 28V, I_{DQ} = 88mA)

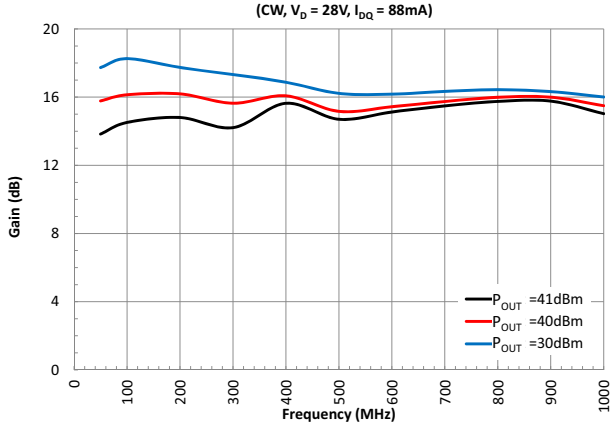


Power Added Efficiency versus Frequency
(CW, V_D = 28V, I_{DQ} = 88mA)

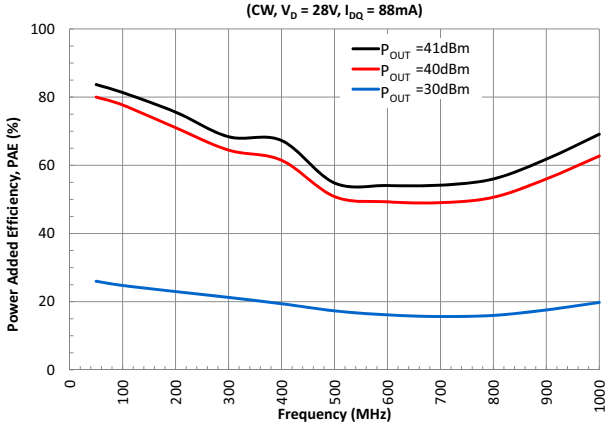


Input Return Loss versus Frequency
(CW, V_D = 28V, I_{DQ} = 88mA)

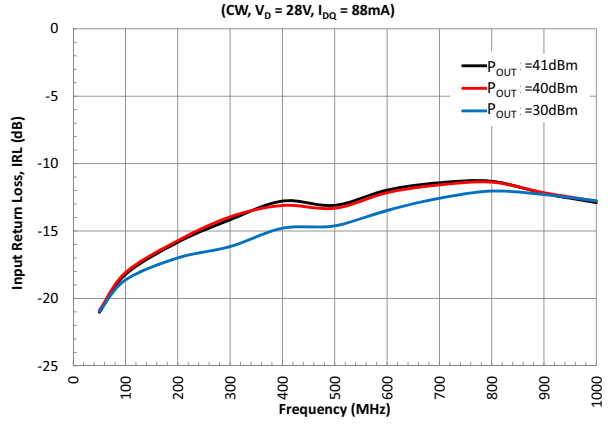


Gain versus Output Power
(CW, V_D = 28V, I_{DQ} = 88mA)

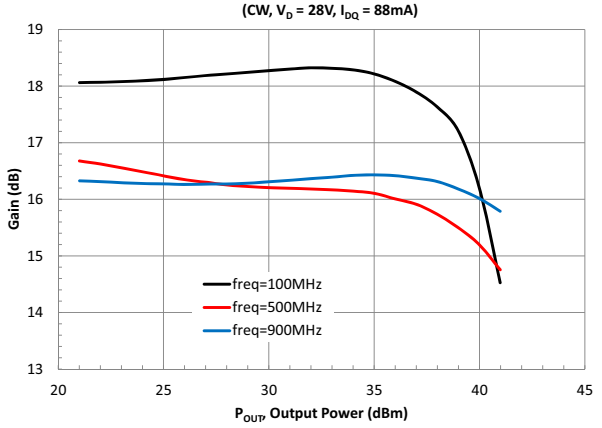

Power Added Efficiency versus Output Power
(CW, V_D = 28V, I_{DQ} = 88mA)

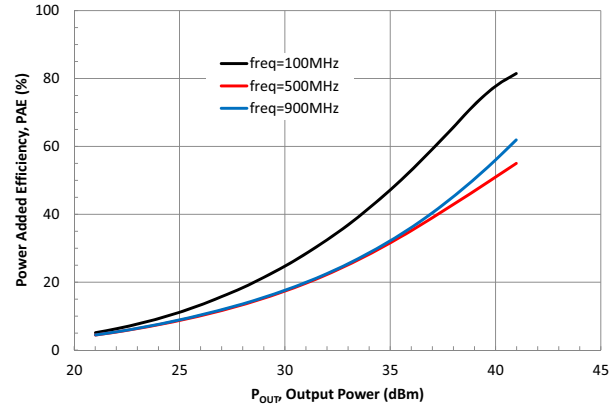


Input Return Loss versus Output Power
(CW, V_D = 28V, I_{DQ} = 88mA)

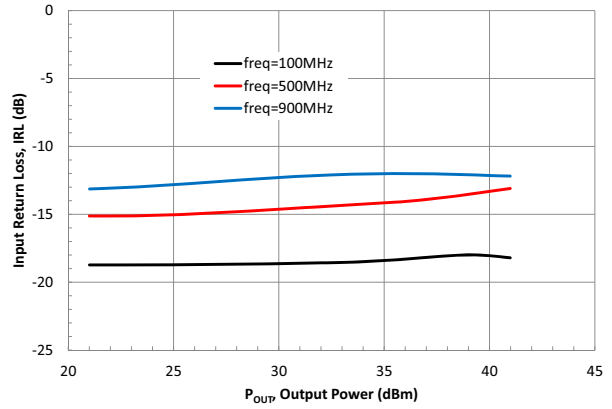


Typical Performance in Standard Fixed Tuned Test Fixture Matched for 50MHz to 1000MHz (T = 25°C, unless noted)


IMD versus Output Power
(V_D = 28V, I_{DQ} = 132mA, f1 = 449.5MHz, f2 = 450.5MHz)

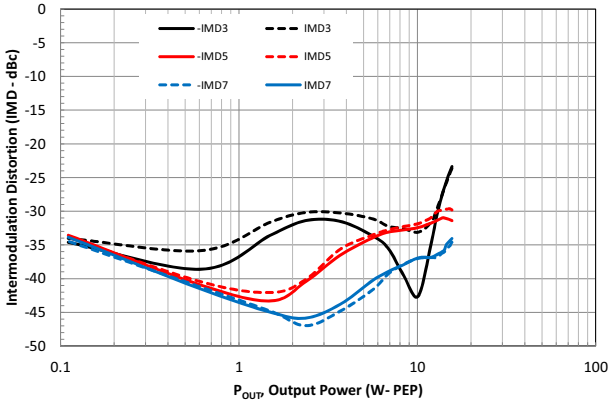


IMD versus Tone Spacing
(P_{OUT} = 12.5W PEP, V_D = 28V, I_{DQ} = 132mA)

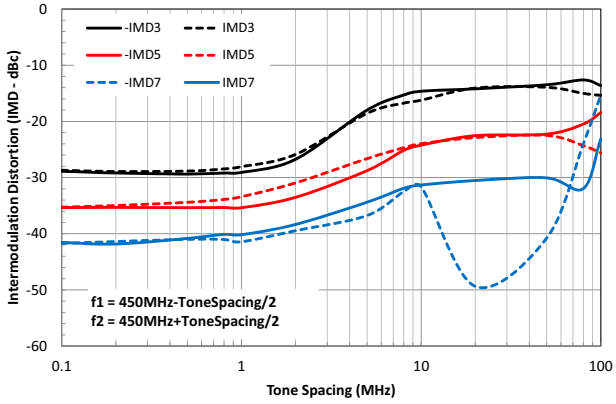


Gain versus Output Power
(2-Tone 1MHz Separation, V_D = 28V, I_{DQ} varied, fc =450MHz)

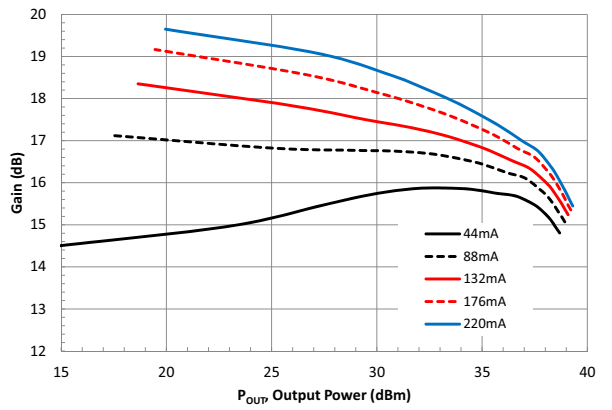

IMD3 versus Output Power
(2-Tone 1MHz Separation, V_D = 28V, I_{DQ} varied, fc = 450MHz)

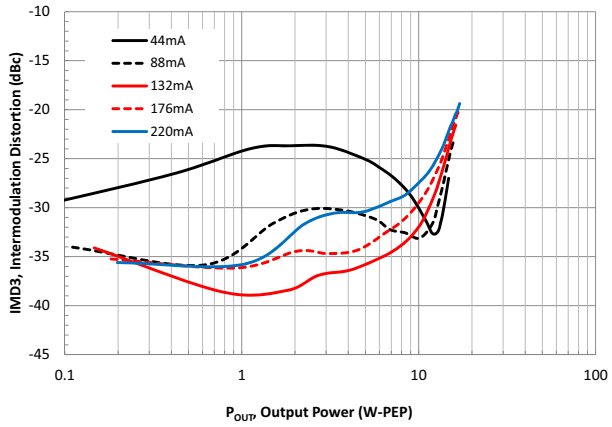


Power Dissipation De-rating Curve
(Based on Maximum package temperature and R_{TH})

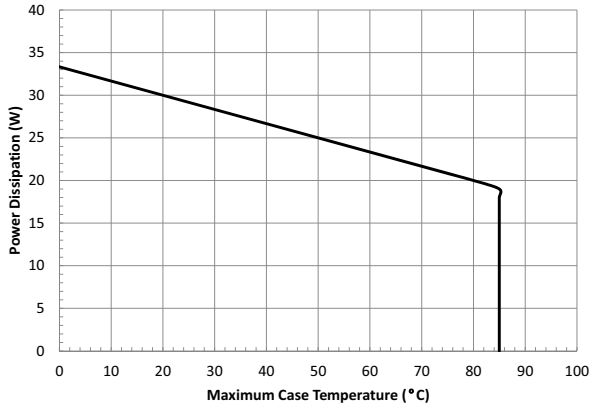

7628 Thorndike Road, Greensboro, NC 27409-9421 · For sales or technical support, contact RFMD at (+1) 336-678-5570 or customerservice@rfmd.com.

Package Drawing

(All dimensions in mm.)

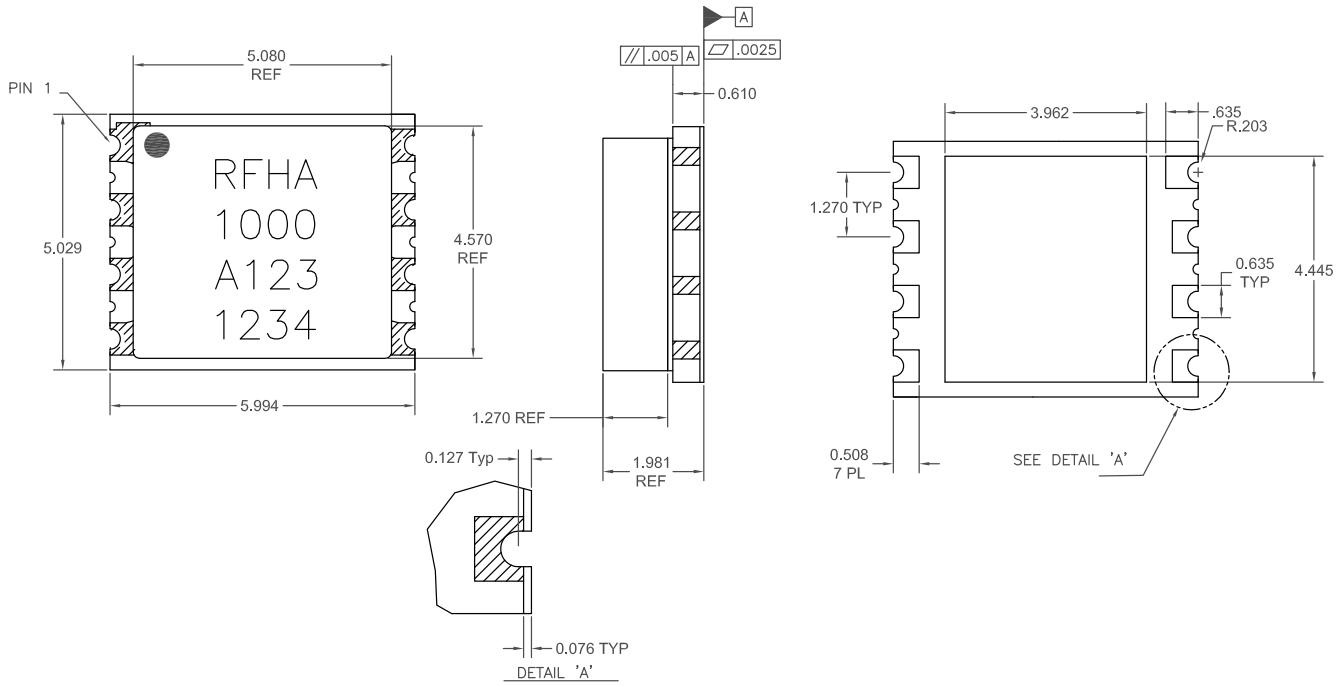

A123 : Trace Code
1234 : Serial Number
Package Style: Ceramic SO8

Pin Names and Descriptions

Pin	Name	Description
1	VGS	Gate DC Bias pin
2	RF IN	RF Input
3	RF IN	RF Input
4	N/C	No Connect
5	N/C	No Connect
6	RF OUT/VDS	RF Output / Drain DC Bias pin
7	RF OUT/VDS	RF Output / Drain DC Bias pin
8	N/C	No Connect
Pkg Base	GND	Ground


rfmd.com

Bias Instruction for RFHA1000 Evaluation Board

ESD Sensitive Material. Please use proper ESD precautions when handling devices of evaluation board. Evaluation board requires additional external fan cooling. Connect all supplies before powering evaluation board.


1. Connect RF cables at RFIN and RFOUT.
2. Connect ground to the ground supply terminal, and ensure that both the VG and VD grounds are also connected to this ground terminal.
3. Apply -5V to VG.
4. Apply 28V to VD.
5. Increase V_G until drain current reaches 88mA or desired bias point.
6. Turn on the RF input.

Typical test data provided is measured to SMA connector reference plane, and include evaluation board / broadband bias network mismatch and losses.

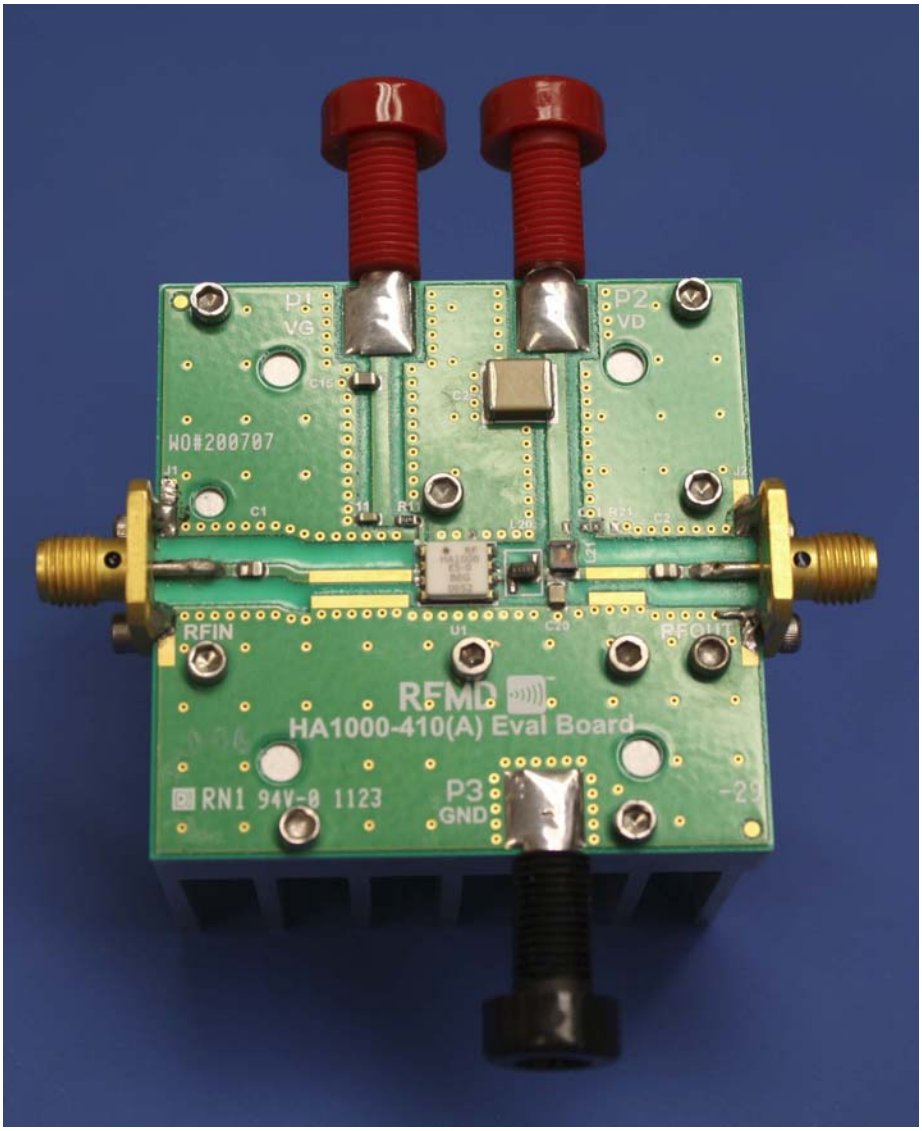

7628 Thorndike Road, Greensboro, NC 27409-9421 · For sales or technical support, contact RFMD at (+1) 336-678-5570 or customerservice@rfmd.com.


Evaluation Board Schematic

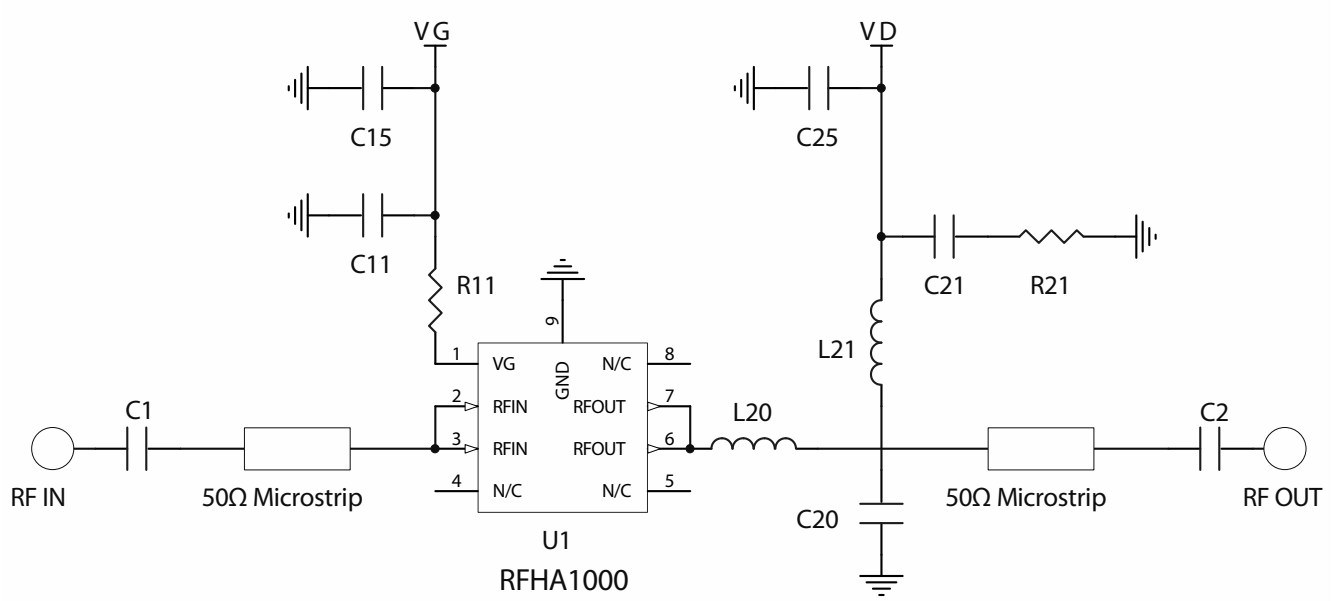

Evaluation Board Bill of Materials (BOM)

Component	Value	Manufacturer	Part Number
C1, C2	2400pF	Dielectric Labs Inc	C08BL242X-5UN-X0
C11	10000pF	Murata Electronics	GRM188R71H103KA01D
C15	10μF	Murata Electronics	GRM21BF51C106ZE15L
C20	3.3pF	ATC	100A3R3BW150XC
C25	4.7μF	Murata Electronics	GRM55ER72A475KA01L
R11	470Ω	Panasonic	ERJ-3GEYJ471
L20	5.4nH	Coilcraft	0906-5_LB
L21	0.9μH	Coilcraft	1008AF-901XJLC
C21, R21	NOT USED	-	-


Evaluation Board Layout

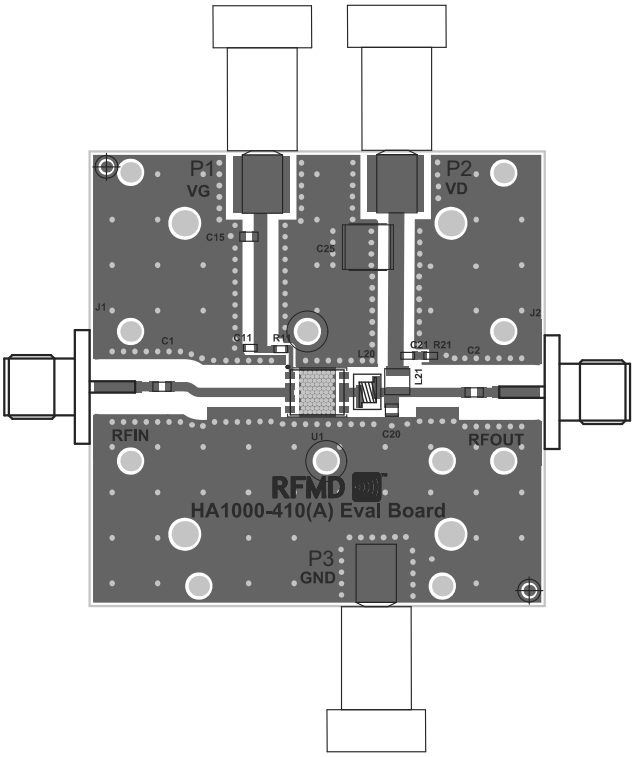

Device Impedances

Frequency (MHz)	RFHA1000PCBA-410 (50MHz to 1000MHz)	
	Z Source (Ω)	Z Load (Ω)
50	49.9 - j1.3	48.2 + j7.0
100	50.0 - j1.4	49.1 + j1.3
200	49.6 - j2.2	46.8 - j3.3
300	49.2 - j3.1	43.0 - j5.2
400	48.4 - j4.0	38.4 - j5.2
500	47.6 - j4.5	34.1 - j3.7
600	46.8 - j5.1	30.1 - j0.9
700	45.5 - j5.4	26.5 + j2.8
800	44.8 - j5.4	23.8 + j7.0
900	43.7 - j5.3	21.2 + j11.6
1000	43.0 - j5.0	19.3 + j16.6

NOTE: Device impedances reported are the measured evaluation board impedances chosen for a tradeoff of efficiency and peak power performance across the entire frequency bandwidth.

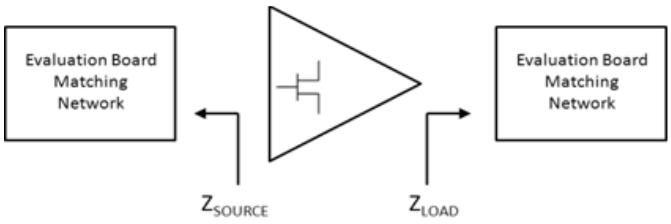

7628 Thorndike Road, Greensboro, NC 27409-9421 · For sales or technical support, contact RFMD at (+1) 336-678-5570 or customerservice@rfmd.com.

Device Handling/Environmental Conditions

RFMD does not recommend operating this device with typical drain voltage applied and the gate pinched off in a high humidity, high temperature environment.

GaN HEMT devices are ESD sensitive materials. Please use proper ESD precautions when handling devices or evaluation boards.

DC Bias

The GaN HEMT device is a depletion mode high electron mobility transistor (HEMT). At zero volts V_{GS} the drain of the device is saturated and uncontrolled drain current will destroy the transistor. The gate voltage must be taken to a potential lower than the source voltage to pinch off the device prior to applying the drain voltage, taking care not to exceed the gate voltage maximum limits. RFMD recommends applying V_{GS} = -5V before applying any V_{DS}.

RF Power transistor performance capabilities are determined by the applied quiescent drain current. This drain current can be adjusted to trade off power, linearity, and efficiency characteristics of the device. The recommended quiescent drain current (I_{DQ}) shown in the RF typical performance table is chosen to best represent the operational characteristics for this device, considering manufacturing variations and expected performance. The user may choose alternate conditions for biasing this device based on performance tradeoffs.

Mounting and Thermal Considerations

The thermal resistance provided as R_{TH} (junction to case) represents only the packaged device thermal characteristics. This is measured using IR microscopy capturing the device under test temperature at the hottest spot of the die. At the same time, the package temperature is measured using a thermocouple touching the backside of the die embedded in the device heat sink but sized to prevent the measurement system from impacting the results. Knowing the dissipated power at the time of the measurement, the thermal resistance is calculated.

In order to achieve the advertised MTTF, proper heat removal must be considered to maintain the junction at or below the maximum of 200°C. Proper thermal design includes consideration of ambient temperature and the thermal resistance from ambient to the back of the package including heat sinking systems and air flow mechanisms. Incorporating the dissipated DC power, it is possible to calculate the junction temperature of the device