RGBP101006-PCTC7

Multi-Wavelength SMD Type

Features

- Top view 1010 package
- Wide viewing angle
- RGB individual control
- High reliability
- RoHS compliance


Description

The RGBP101006-PCTC7 is a high brightness device designed for demanding applications in efficiency and reduced space. An ideal device in emphasizing visual effects, advertisement, decoration as well as general backlighting needs.


Applications

- General lighting
- Indoor signage display applications
- Switch light
- Decorative and Entertainment lighting

Package Outline

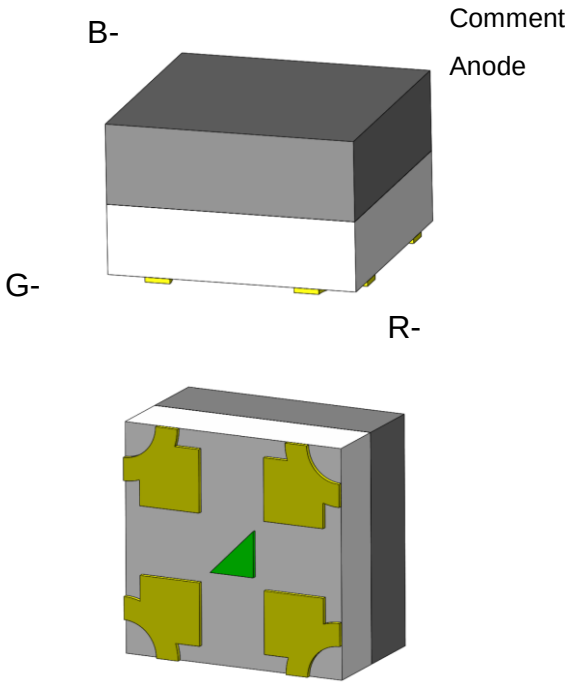

Schematic

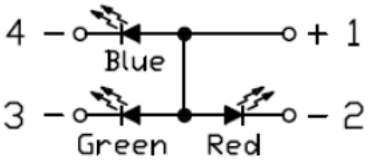

Absolute Maximum Rating at 25^{0}C

Symbol	Parameters		Ratings	Units	Notes
I_F	Continuous Forward Current	R	20	mA	
		G	20		
		B	20		
I_{FP}	Peak Forward Current	R	50	mA	1
		G	50		
		B	50		
V_R	Reverse Voltage		10	V	
T_{opr}	Operating Temperature		-40 ~ +85	^{0}C	
T_{stg}	Storage Temperature		-40 ~ +100	^{0}C	
T_{sol}	Soldering Temperature		260	^{0}C	2
P_D	Power Dissipation at(or below) 25℃ Free Air Temperature	R	50	mW	
		G	60		
		B	60		

Electro-Optical Characteristics *TA = 25°C (unless otherwise specified)*

Optical Characteristics (Red)

Symbol	Parameters	Test Conditions	Min	Typ	Max	Units	Notes
Iv	Luminous Intensity	I_F=5mA	16.0	-	29.2	mcd	3
λd	Dominant Wavelength	I_F=5mA	619.5	622.0	624.5	nm	4
θ1/2	Angle of Half Intensity	I_F=5mA	-	±57.5	-	deg	

Electrical Characteristics (Red)

Symbol	Parameters	Test Conditions	Min	Typ	Max	Units	Notes
V_F	Forward Voltage	I_F=5mA	1.7	-	2.3	V	
I_R	Reverse Current	V_R=10V	-	-	0.5	μA	

Optical Characteristics (Green)

Symbol	*Parameters*	*Test Conditions*	*Min*	*Typ*	*Max*	*Units*	*Notes*
Iv	Luminous Intensity	I_F=3mA	29.6	-	50.0	mcd	3
λd	Dominant Wavelength	I_F=3mA	522.0	529.0	537.0	nm	4
θ1/2	Angle of Half Intensity	I_F=3mA	-	±57.5	-	deg	

Electrical Characteristics (Green)

Symbol	*Parameters*	*Test Conditions*	*Min*	*Typ*	*Max*	*Units*	*Notes*
V_F	Forward Voltage	I_F=3mA	2.5	-	3.5	V	
I_R	Reverse Current	V_R=10V	-	-	0.5	μA	

Optical Characteristics (Blue)

Symbol	*Parameters*	*Test Conditions*	*Min*	*Typ*	*Max*	*Units*	*Notes*
Iv	Luminous Intensity	I_F=3mA	5.8	-	12.7	mcd	3
λd	Dominant Wavelength	I_F=3mA	459.5	467	474.5	nm	4
θ1/2	Angle of Half Intensity	I_F=3mA	-	±57.5	-	deg	

Electrical Characteristics (Blue)

Symbol	*Parameters*	*Test Conditions*	*Min*	*Typ*	*Max*	*Units*	*Notes*
V_F	Forward Voltage	I_F=3mA	2.5	-	3.5	V	
I_R	Reverse Current	V_R=10V	-	-	0.5	μA	

Notes:

1. I_{FP} Conditions--Pulse Width≦ 100μs and Duty≦ 10%.
2. Soldering time≦ 10 seconds.

3. Bin Range of Luminous Intensity

Red				
Bin Code	Min	Max	Unit	Condition
E0	16.0	21.6	mcd	I_F=5mA
F0	21.6	29.2		
F1	19.0	25.7		
Green				
L0	29.6	38.5	mcd	I_F=3mA
M0	38.5	50.0		
L1	34.0	44.2		
Blue				
Bin Code	Min	Max	Unit	Condition
A0	5.8	7.5	mcd	I_F=3mA
C0	7.5	9.8		
D0	9.8	12.7		
C1	9.0	11.7		

Tolerance of Luminous Intensity ±10%

4. Bin Range of Dominant Wavelength

Red				
Bin Code	Min	Max	Unit	Condition
R1	619.5	624.5	nm	I_F=5mA
Green				
G1	522	527	nm	I_F=3mA
G2	527	532		
G3	532	537		
G4	525	530		
Blue				
BA	459.5	464.5	nm	I_F=3mA
B1	464.5	469.5		
B2	469.5	474.5		
B4	467.5	472.5		

Tolerance of Dominant Wavelength: ±1nm.

Tolerance of Forward Voltage: ±0.1V.

Typical Characteristic Curves

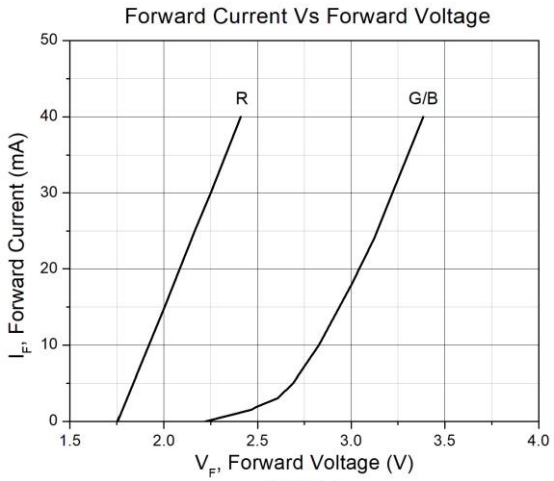


Figure 1

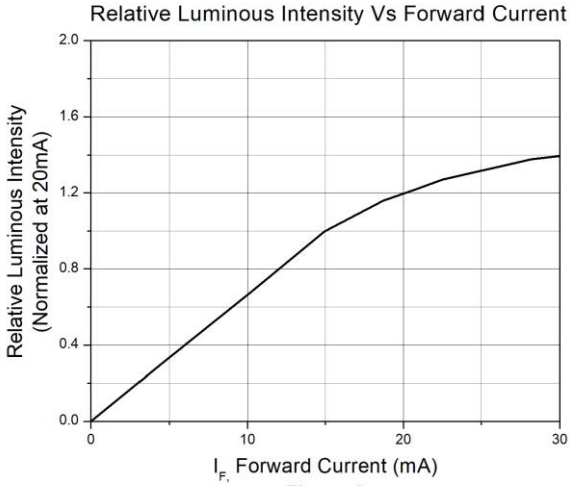


Figure 2

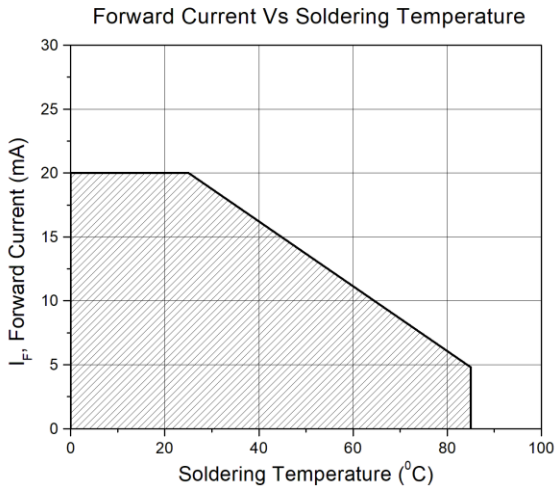


Figure 3

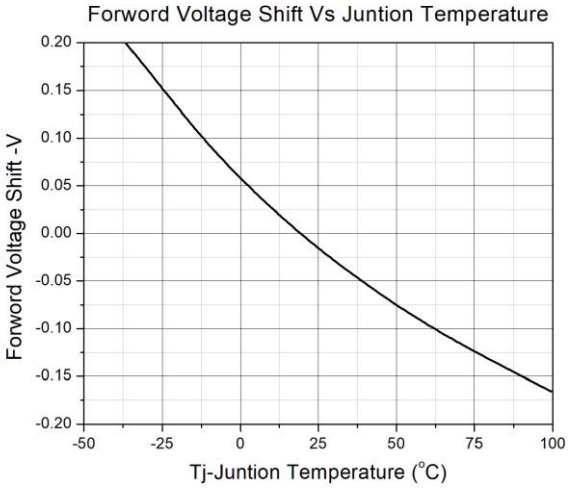


Figure 4

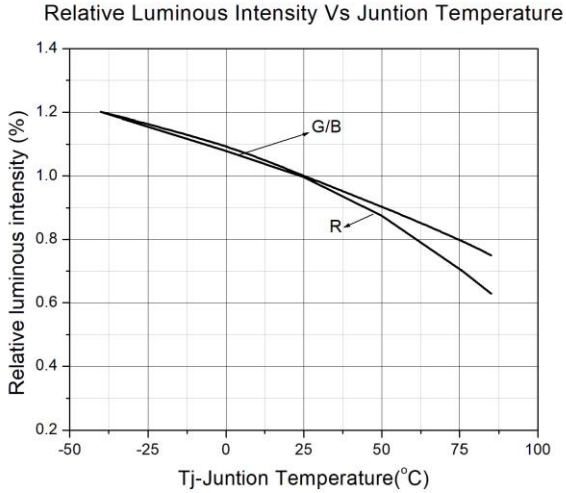


Figure 5

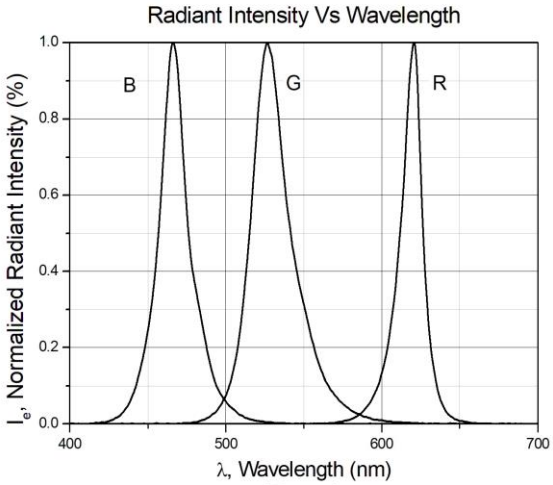


Figure 6

Typical Characteristic Curves


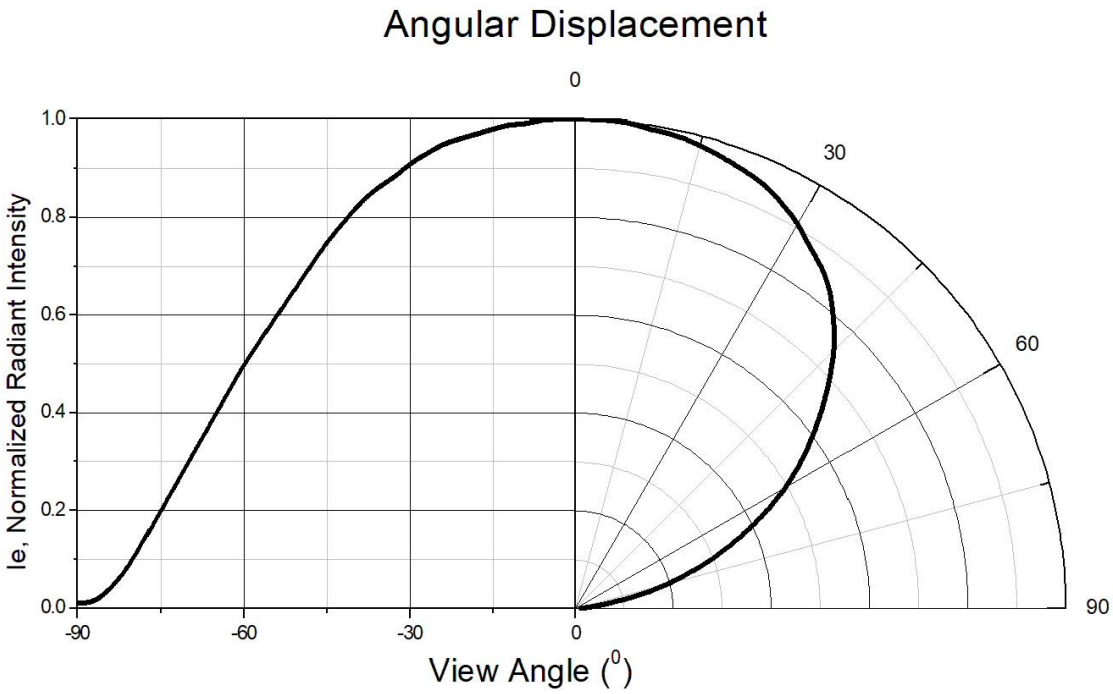



Figure 7

Package Dimension *All dimensions are in mm, unless otherwise stated*

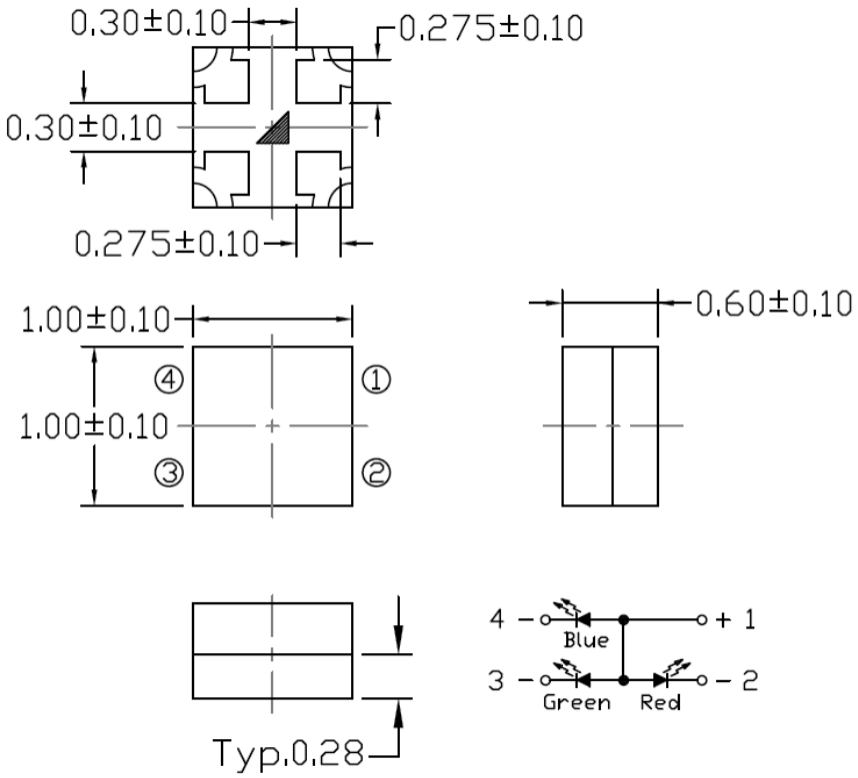

Note: Tolerance unless mentioned is ±0.1mm

Recommended Soldering Mask *All dimensions are in mm, unless otherwise stated*




Note: Tolerance unless mentioned is ±0.1mm


Ordering Information

Part Number	*Description*	*Quantity*
RGBP101006-PCTC7	Tape & Reel	18000 pcs

Reel Dimension *All dimensions are in mm, unless otherwise stated*

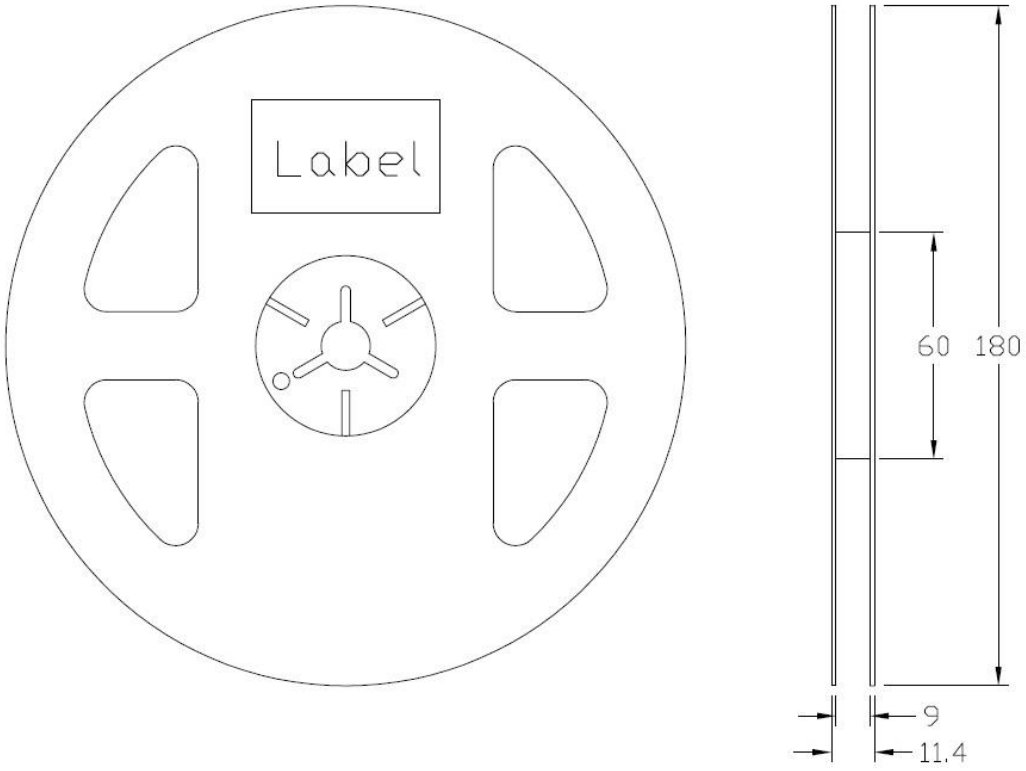


Tape Dimension *All dimensions are in mm, unless otherwise stated*

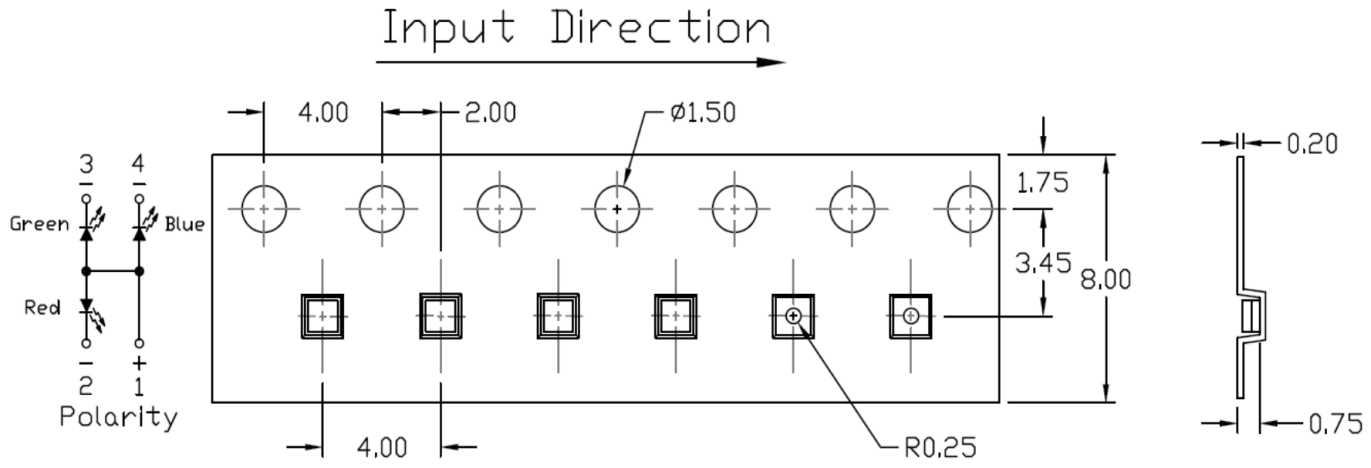

Note: Tolerance unless mentioned is ±0.1mm

Label Form Specification

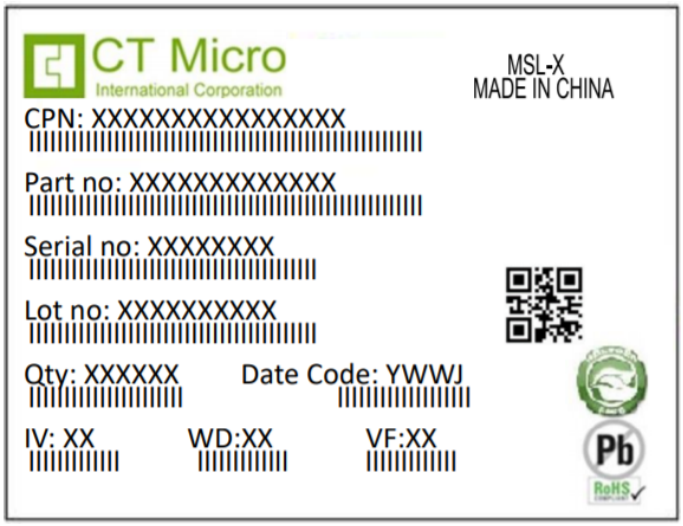

CPN : Customer Part Number

Part no: CTM Production Number

Serial no: Production Number

Lot no: Lot number

Q'ty: Packing Quantity

Date Code: Manufacture Date

IV : Bin Code of Luminous Intensity

WD : Bin Code of Dominant Wavelength


VF : Bin Code of Forward Voltage

MADE IN CHINA: Production Place

Storage Condition

1. Do not open moisture proof bag before the products are ready to use.
2. The moisture barrier bag should be stored at 30°C and 90%R.H. max. before opening. Shelf life of non-opened bag is 12 months after the bag sealing date.
3. After opening the moisture barrier bag floor life is 1 year at 30°C/60%RH. max. Unused LEDs should be resealed into moisture barrier bag. (Refer to J-STD-020 Standard)
4. If the moisture absorbent material has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the J-STD-033 Standard conditions.

Reflow Profile

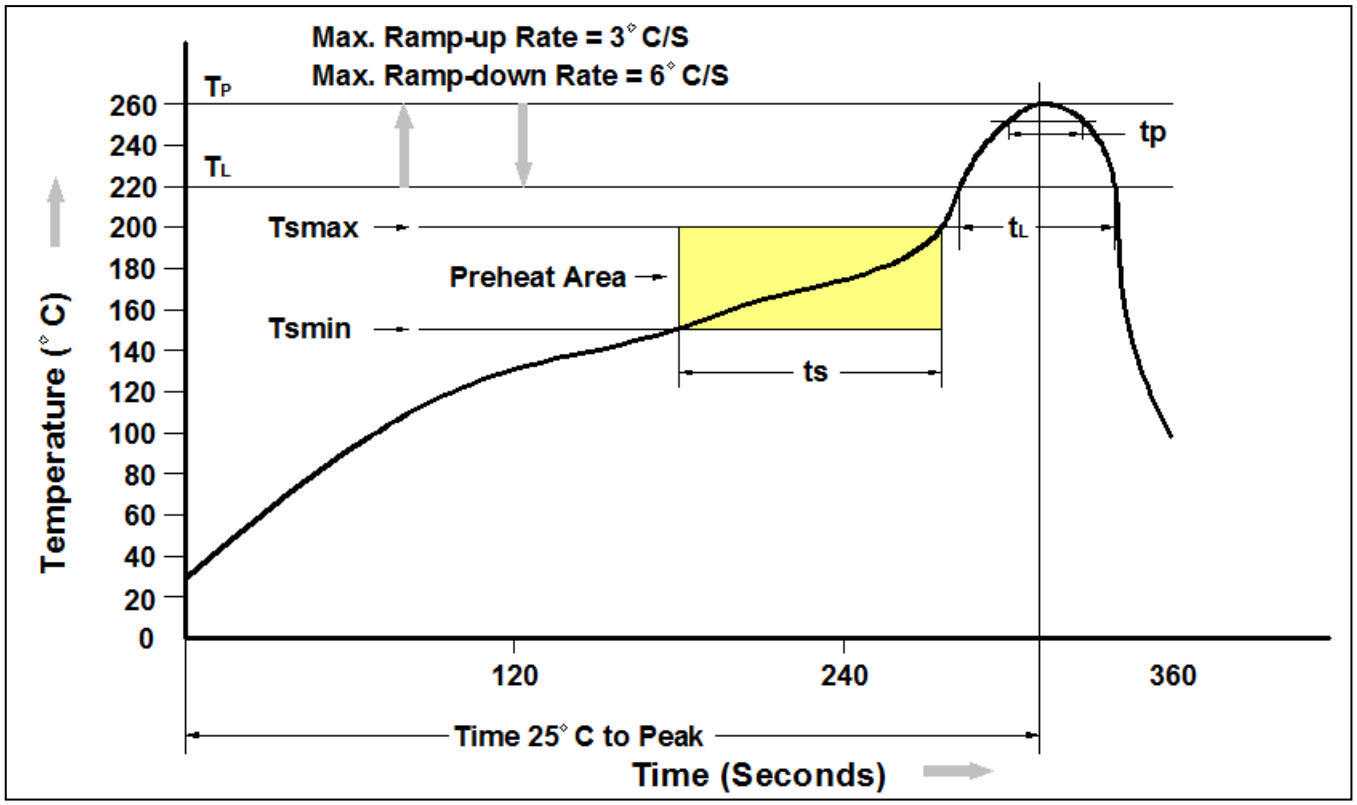

Profile Feature	Pb-Free Assembly Profile
Temperature Min. (Tsmin)	150°C
Temperature Max. (Tsmax)	200°C
Time (ts) from (Tsmin to Tsmax)	60-120 seconds
Ramp-up Rate (t_L to t_P)	3°C/second max.
Liquidous Temperature (T_L)	217°C
Time (t_L) Maintained Above (T_L)	60 – 150 seconds
Peak Body Package Temperature	260°C +0°C / -5°C
Time (t_P) within 5°C of 260°C	30 seconds
Ramp-down Rate (T_P to T_L)	6°C/second max
Time 25°C to Peak Temperature	8 minutes max.

DISCLAIMER

CT MICRO RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. CT MICRO DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

CT MICRO ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT EXPRESS WRITTEN APPROVAL OF CT MICRO INTERNATIONAL CORPORATION.

1. *Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, or (c) whose failure to perform when properly used in accordance with instruction for use provided in the labelling, can be reasonably expected to result in significant injury to the user.*
2. *A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.*