

## Low Profile Filtered Modular Jacks

# N Series



UL Recognized  
CSA Certified



Shield 3  
RJ11




Shield 4  
RJ45

## N Series

- Low profile SignalSentry filtered jack
- Available with sleeve or block inductors
- Available unshielded or shielded with board grounded shield or spring fingered panel ground interface

## Typical Impedance in Ohms

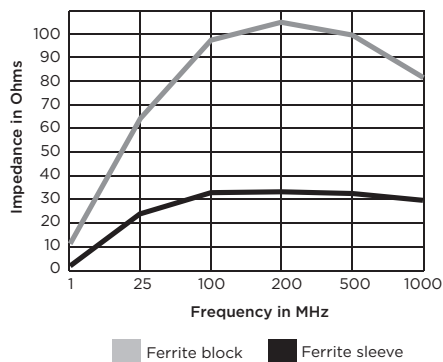

Unshielded  
Ferrite Block

## Specifications

### Contacts:

|                          |                        |
|--------------------------|------------------------|
| Material:                | Phosphor Bronze        |
| Plating:                 | 50 microinches gold    |
| Barrier underplating:    | 100 microinches nickel |
| Resistance:              |                        |
| Initial:                 | 20 mΩ max.             |
| After 500 mating cycles: | 30 mΩ max.             |

### Ferrites:

|          |                                       |
|----------|---------------------------------------|
| Type:    | High resistivity, nickel zinc ceramic |
| Sleeves: | Single-aperture cylinders             |
| Block:   | Multi-aperture rectangular prism      |

### Shield Material:

Tin-plated copper alloy

### Housing Material:

Black glass-filled polyamide  
(STANYL TE250F3)

### Dielectric Withstanding Voltage:

|                                  |                            |
|----------------------------------|----------------------------|
| Line to Line and Line to Ground: | 1000 VAC for<br>60 seconds |
|----------------------------------|----------------------------|

### Printed Circuit Board Retention:

|                   |                |
|-------------------|----------------|
| Before soldering: | 1 lb. minimum  |
| After soldering:  | 20 lb. minimum |

## Available Part Numbers


|            |            |
|------------|------------|
| RJ11-6N-B  | RJ45-8N-B  |
|            | RJ45-8N-S  |
| RJ11-6N3-B | RJ45-8N3-B |
|            | RJ45-8N3-S |
| RJ11-6N4-B | RJ45-8N4-B |
|            | RJ45-8N4-S |

Model dimensions and PC board layout on pages 255-259

## Model Dimensions


### L, LC, LCT and X Series RJ Jack Dimensions

#### RJ11 - No Shield

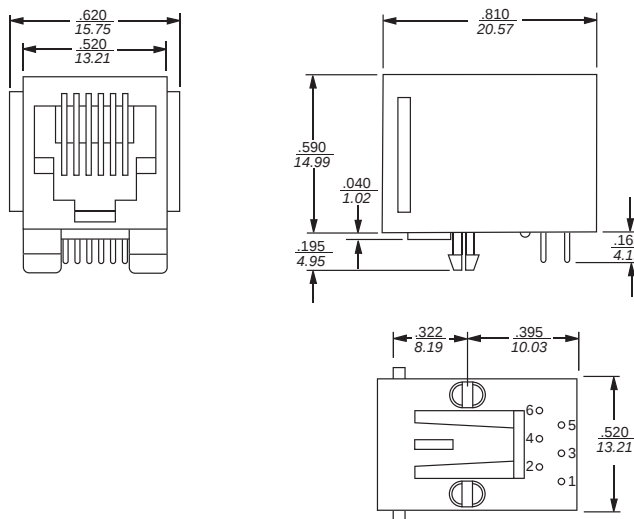


| Part No.  |           |         |
|-----------|-----------|---------|
| RJ11-2L-S | RJ11-2L-B | RJ11-2X |
| RJ11-4L-S | RJ11-4L-B | RJ11-4X |
| RJ11-6L-S | RJ11-6L-B | RJ11-6X |

#### RJ11 - Style 2 Shield

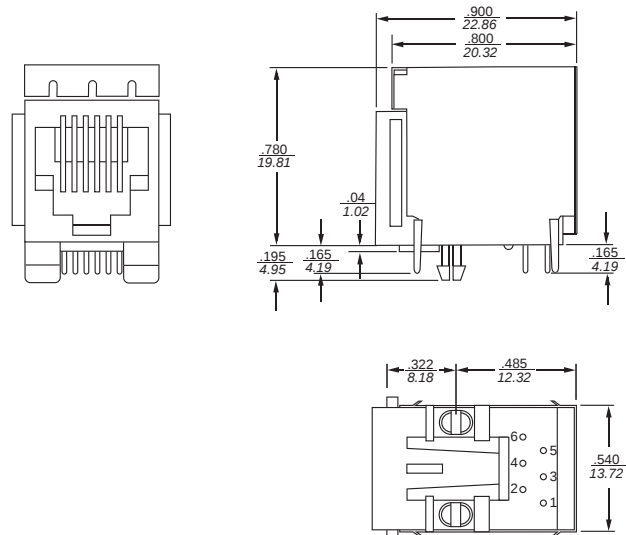


| Part No.    |             |            |              |
|-------------|-------------|------------|--------------|
| RJ11-2LC2-S | RJ11-2LC2-B | RJ11-4L2-S | RJ11-6L2-B   |
| RJ11-4LC2-S | RJ11-4LC2-B | RJ11-6L2-S | RJ11-6LCT2-S |
| RJ11-6LC2-S | RJ11-6LC2-B | RJ11-4L2-B | RJ11-6LCT2-B |

#### RJ11 - Style 1 Shield

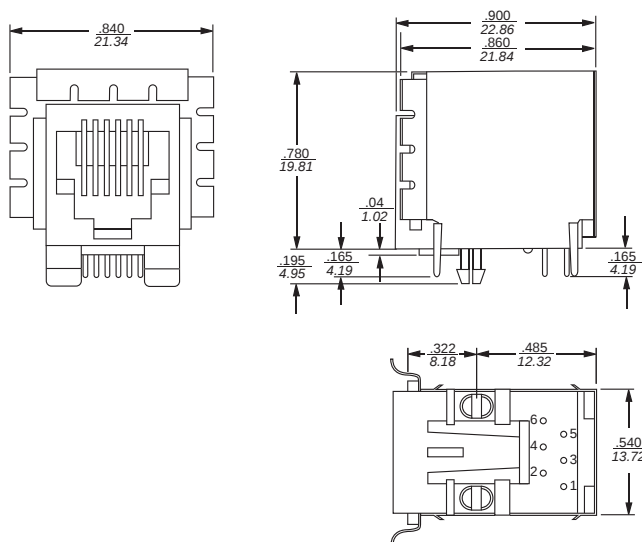

| Part No.    |             |            |              |
|-------------|-------------|------------|--------------|
| RJ11-2LC1-S | RJ11-2LC1-B | RJ11-4L1-S | RJ11-6L1-B   |
| RJ11-4LC1-S | RJ11-4LC1-B | RJ11-6L1-S | RJ11-6LCT1-S |
| RJ11-6LC1-S | RJ11-6LC1-B | RJ11-4L1-B | RJ11-6LCT1-B |

#### RJ11 - PC Board Layout

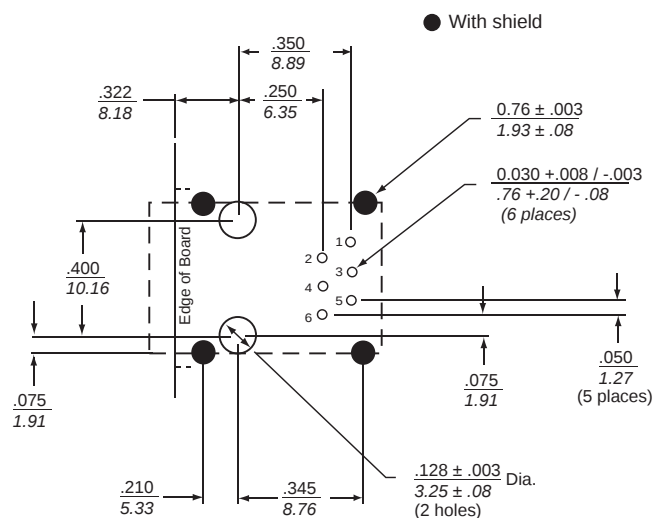

For all RJ11 L, LC, LCT and X Series Models  
Shown from Component Side


All tolerances ± 0.010 [0.25] unless otherwise noted

For email, phone or live chat, please go to  
**te.com/help**  
**corcom.com**


### Model Dimensions (continued)

### L, LC, LCT and X Series RJ Jack Dimensions *(continued)*

## RJH - No Shield

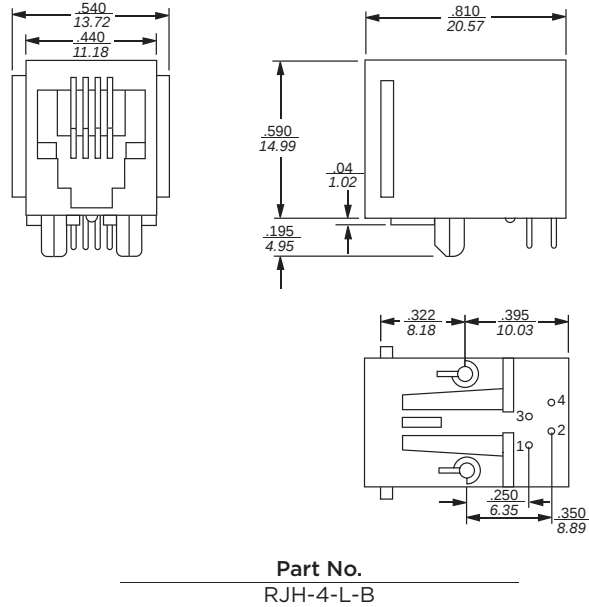


## RJH - PC Board Layout

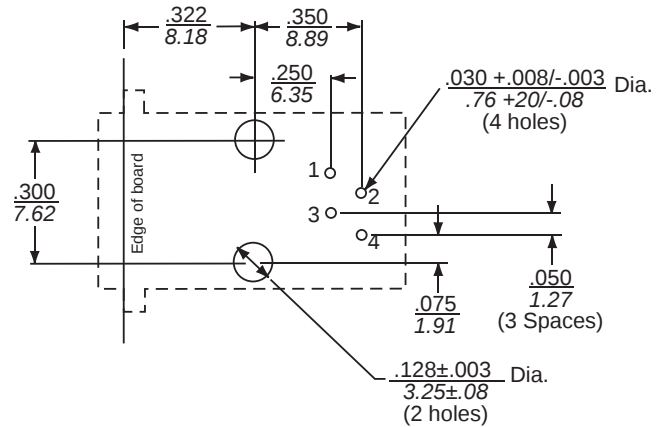


## N and Z Series RJ Jack Dimensions

## RJ11 – Low Profile, No Shield

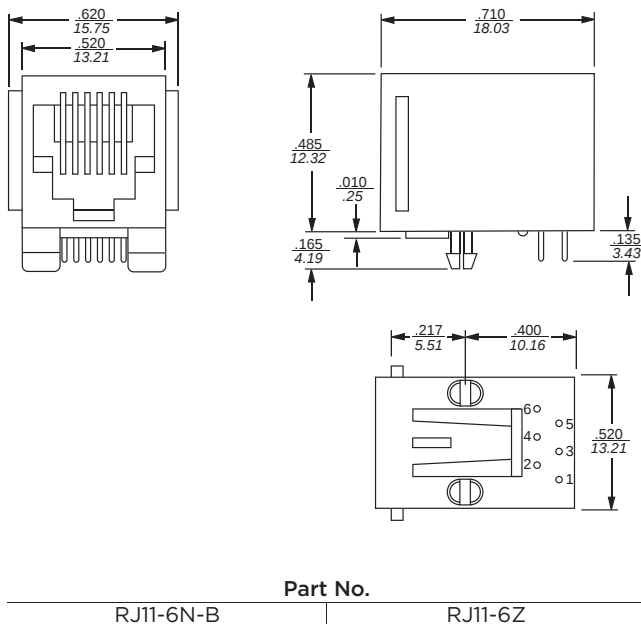

## RJ11 Low Profile, Style 3 Shield

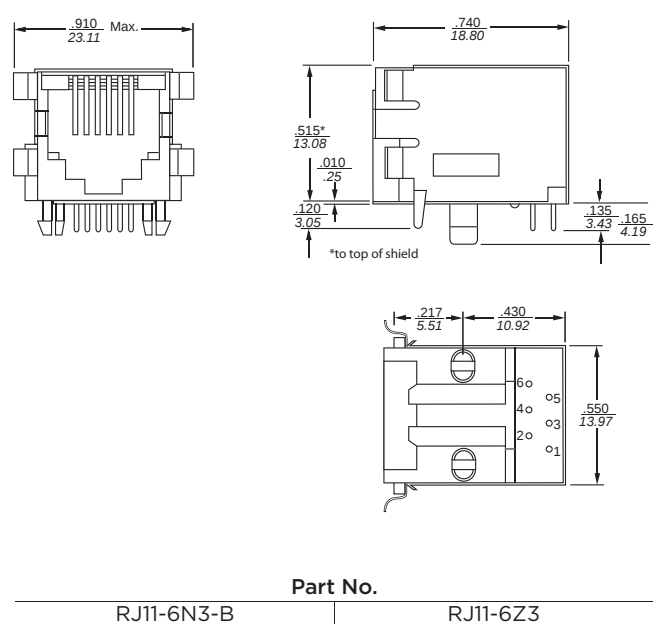


All tolerances  $\pm 0.010$  [0.25] unless otherwise noted



## Model Dimensions *(continued)*

### N and Z Series RJ Jack Dimensions *(continued)*


#### RJ45 Low Profile, Style 4 Shield

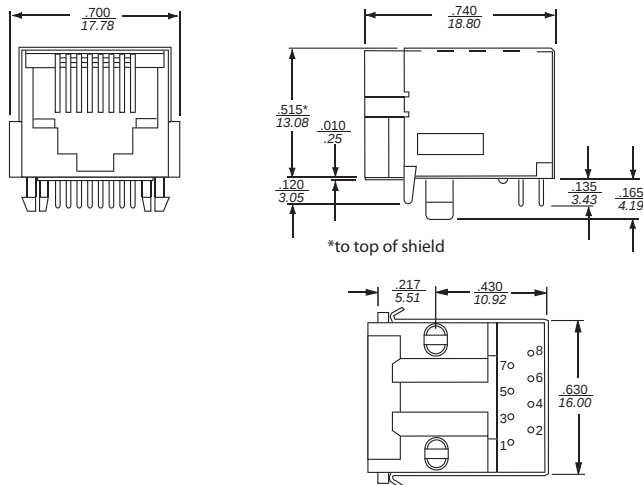

Part No.

|            |            |          |
|------------|------------|----------|
| RJ45-8N4-B | RJ45-8N4-S | RJ45-8Z4 |
|------------|------------|----------|

#### RJ45 Low Profile PC Board Layout

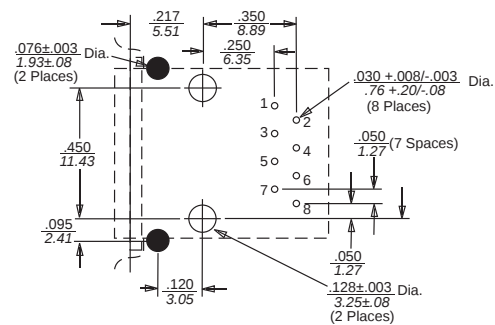

For all RJ45 N and Z Series Models  
Shown from Component Side

All tolerances  $\pm 0.010$  [0.25] unless otherwise noted