

Features

Unregulated Converters

- Safety standards and approvals: EN 60950, EN 60601 certified, rated for 250VAC
- Custom Solutions Available
- 3kVDC & 4kVDC Isolation
- UL94V-0 Package Material
- Optional Continuous Short Circuit Protected
- Efficiency to 84%

Selection Guide

Part Number	Input Voltage	Output Voltage	Output Current	Efficiency
SIP7	4kV (VDC)	(VDC)	(mA)	(%)
RKZ-xx3.3S (H)	5, 9, 12, 15, 24	3.3	606	70
RKZ-xx05S (H)	5, 9, 12, 15, 24	5	400	82-84
RKZ-xx09S (H)	5, 9, 12, 15, 24	9	222	78-84
RKZ-xx12S (H)	5, 9, 12, 15, 24	12	168	82-84
RKZ-xx15S (H)	5, 9, 12, 15, 24	15	132	82-84
RKZ-xx24S (H)	5, 9, 12, 15, 24	24	83	82-84
RKZ-xx3.3D (H)	5, 9, 12, 15, 24	±3.3	±303	70-82
RKZ-xx05D (H)	5, 9, 12, 15, 24	±5	±200	70-82
RKZ-xx09D (H)	5, 9, 12, 15, 24	±9	±111	82-84
RKZ-xx12D (H)	5, 9, 12, 15, 24	±12	±84	82-84
RKZ-xx15D (H)	5, 9, 12, 15, 24	±15	±66	82-84
RKZ-xx24D (H)	5, 9, 12, 15, 24	±24	±42	82-84

xx = Input Voltage

* add Suffix "P" for Continuous Short Circuit Protection, e.g. RKZ-0524D/P, e.g. RKZ-0524D/HP has 4kV Isolation and is Short Circuit Protected.

Description

The RKZ Series of DC/DC Converters are fully certified to EN 60950-1. This makes them ideal for all Telecom and safety applications where approved isolation is required.

EN 60950 is derived from IEC 950 and is equivalent to UL 1950 and CSA 950 standards.

Specifications (Core Operating Area)

Input Voltage Range			±10%
Output Voltage Accuracy			±5%
Line Voltage Regulation			1.2%/1% of Vin typ.
Load Voltage Regulation (10% to 100% full load)	3.3V output types		20% max.
	5V output type		15% max.
	12V, 15V, 24V output types		10% max.
Output Ripple and Noise (20MHz limited)			150mVp-p max.
Operating Frequency			35kHz min. / 50kHz typ. / 85kHz max.
Efficiency at Full Load			70% min. / 80% typ.
No Load Power Consumption			134mW min. / 212mW typ. / 350mW max.
Isolation Voltage		(tested for 1 second)	3000VDC min.
Rated Working Voltage		(long term isolation)	see Application Notes
Isolation Voltage	H-Suffix	(tested for 1 second)	4000VDC min.
Rated Working Voltage	H-Suffix	(long term isolation)	see Application Notes
Isolation Capacitance			30pF min. / 110pF max.
Isolation Resistance			15 GΩ min.
Short Circuit Protection			1 Second
P-Suffix			Continuous
Operating Temperature Range (free air convection)			-40°C to +85°C (see Graph)
continued on next page			

continued on next page

ECONOLINE

DC/DC-Converter

RKZ Series

2 Watt

SIP7

Single & Dual Output




EN-60950-1 Certified

EN-60601-1 Certified



Derating-Graph (Ambient Temperature)


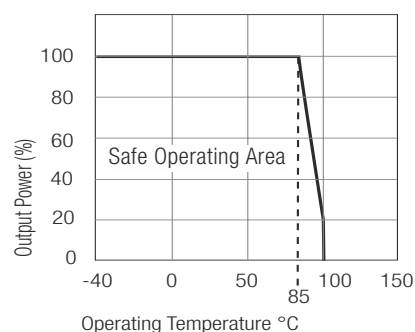


Specifications (Core Operating Area)



Storage Temperature Range	-55°C to +125°C		
Relative Humidity	95% RH		
Package Weight	2.8g		
MTBF (+25°C)	} Detailed Information see Application Notes chapter "MTBF"	using MIL-HDBK 217F	988 x 10 ³ hours
(+85°C)		using MIL-HDBK 217F	135 x 10 ³ hours

Typical Characteristics



RKZ-xx05S

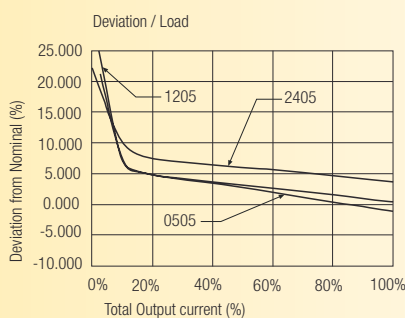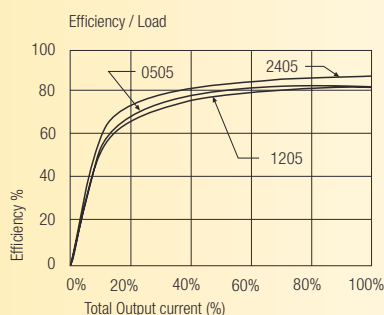



RKZ-xx09S

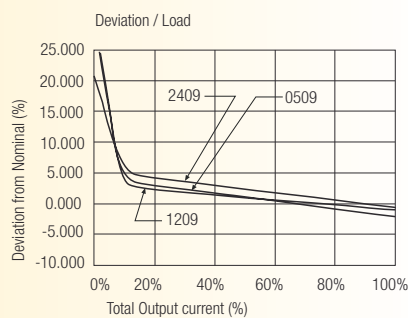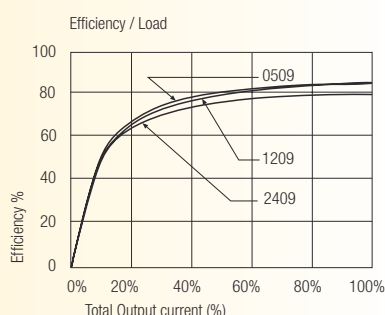



RKZ-xx12S

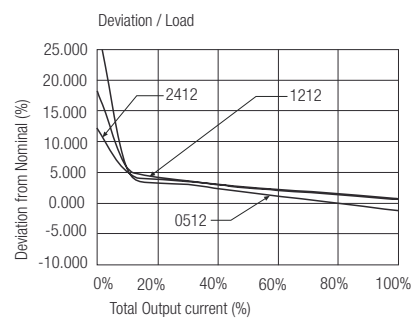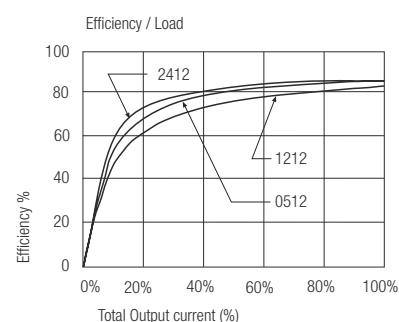



RKZ-xx15S

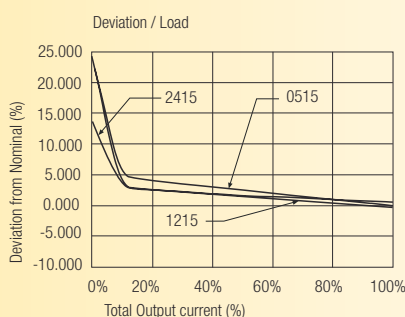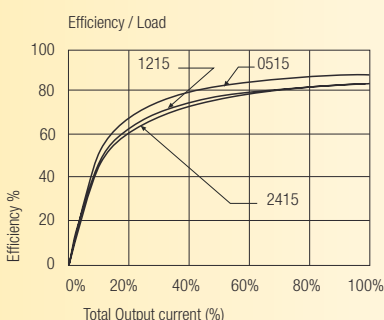

RKZ-xx05D

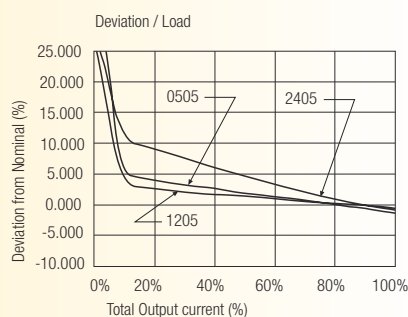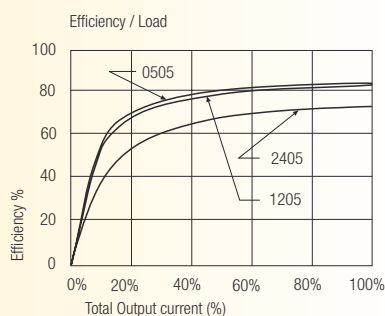


RKZ-xx09D

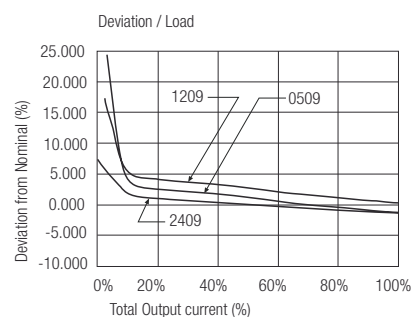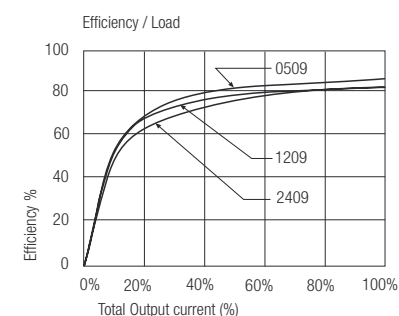


Typical Characteristics

RKZ-xx12D



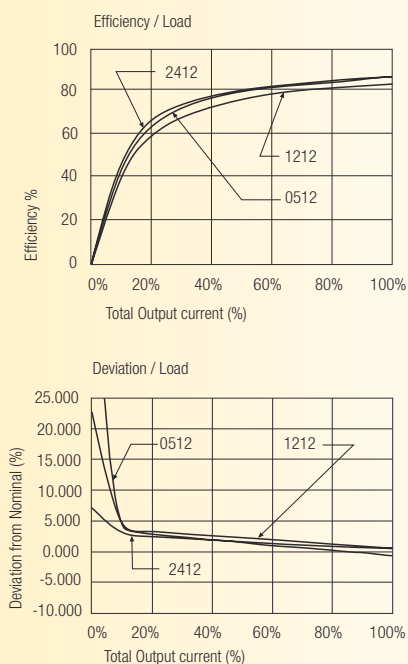


RKZ-xx15D


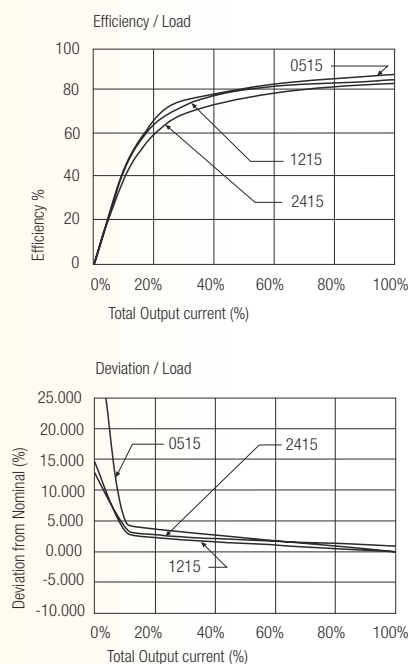


Package Style and Pinning (mm)

7 PIN SIP Package



Recommended Footprint Details



Pin Connections

Pin #	Single	Dual
1	+Vin	+Vin
2	-Vin	-Vin
5	-Vout	-Vout
6	No Pin	Com
7	+Vout	+Vout

NC = No Connection
XX.X ± 0.5 mm
XX.XX ± 0.25 mm