



RL-9750-2HL

THRU-HOLE AC LINE FILTER

DESCRIPTION

- Thru-Hole AC Line Filter

ENVIRONMENTAL DATA

- Storage temperature range: -55°C to +130°C
- Operating temperature range: -40°C to +130°C

PACKAGING INFORMATION

- Packaging information: pg. 495

FEATURES & APPLICATIONS

- Used in low to medium power AC-DC power supplies
- Designed for line to neutral safety clearance
- High impedance at applicable frequency
- Dielectric withstanding voltage rated at 2500 VAC line to line
- Low cost

Verify operation with sample in actual circuit. Order samples at www.rencousa.com.

MECHANICAL DIMENSIONS


U.S. Standard (mm)

PART NUMBER	A (MAX.)	B (MAX.)	C (TYP.)	D ± 0.02 (0.50)	E (MAX.)	F ± 0.02 (0.50)
RL-9750-2HL	1.12 (28.50)	1.08 (27.50)	0.20 (5.00)	0.65 (16.50)	0.75 (19.00)	0.39 (10.00)


PART NUMBER	PART WEIGHT
RL-9750-2HL	19.0g (0.67oz)

G ± 0.002 (0.05)	H ± 0.002 (0.05)
0.65 (16.50)	0.39 (10.00)


FRONT VIEW

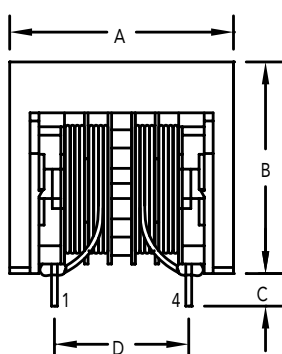

SIDE VIEW

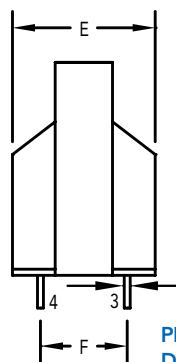


RECOMMENDED LAND PATTERN



PIN
DIAMETER
0.031 $\pm$ 0.004
(0.8 $\pm$ 0.1) (4PL)

SCHEMATIC



RENCO ELECTRONICS INC.



595 International Place, Rockledge, FL 32955-4200 USA • www.rencousa.com • ISO 9001 Certified
Toll Free Engineering Hot Line: 800.645.5828 • P: 321.637.1000 • F: 321.637.1600

RL-9750-2HL

Renco Part No. RL-9750-2HL	Inductance (mH) Min.	DCR (Ohms) ± 20%	I _{rms} (A) Max.
RL-9750-2HL-1.7	1.7	0.045	3.2
RL-9750-2HL-3.0	3.0	0.080	2.5
RL-9750-2HL-5.1	5.1	0.130	2.0
RL-9750-2HL-7.4	7.4	0.185	1.6
RL-9750-2HL-12.0	12.0	0.300	1.2
RL-9750-2HL-19.0	19.0	0.465	1.0
RL-9750-2HL-25.0	25.0	0.670	0.8
RL-9750-2HL-43.0	43.0	1.100	0.6
RL-9750-2HL-62.0	62.0	1.680	0.5
RL-9750-2HL-99.0	99.0	2.720	0.4

NOTES:

1. ELECTRICAL SPECIFICATIONS MEASURED AT 25°C
2. I_{rms} - CURRENT THAT CAUSES THE TEMPERATURE TO RISE APPROX. 40°C ABOVE AMBIENT OF 25°C
3. INDUCTANCE TESTED AT 10 kHz, 0.1 V_{rms}



RENCO ELECTRONICS INC.

595 International Place, Rockledge, FL 32955-4200 USA • www.rencousa.com • ISO 9001 Certified
Toll Free Engineering Hot Line: 800.645.5828 • P: 321.637.1000 • F: 321.637.1600

