

DWG. NO. RM36W4P-1003

REV	DESCRIPTION	BY DATE	APPD
E	ECN 2502	JWH 9/12/00	

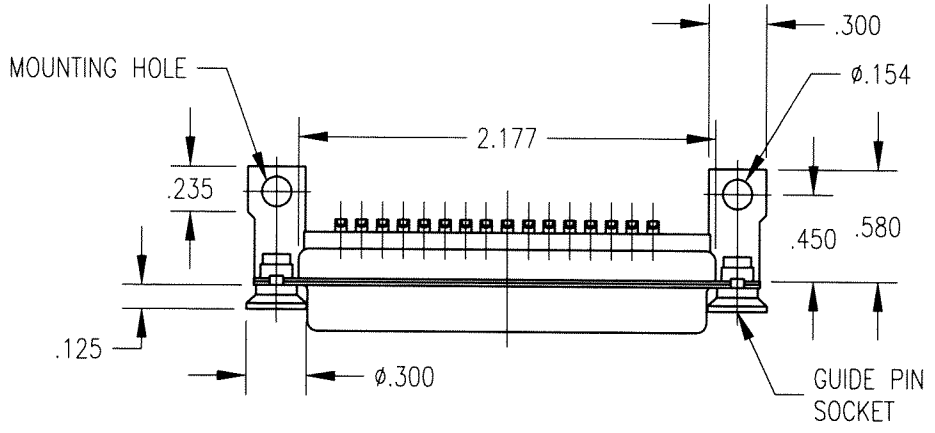

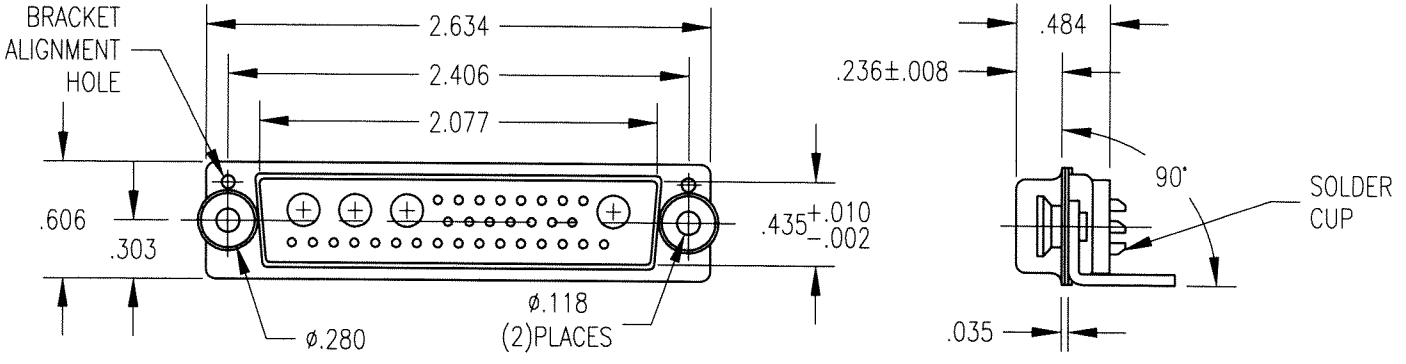

NOTES:

1. MATERIALS:
   - SHELL: STEEL PER ASTM A568
   - INSULATOR: GLASS FILLED POLYESTER, BLACK
   - CONTACT: COPPER ALLOY PER ASTM B140
2. PLATING:
   - CONTACTS: .000030 MIN. GOLD PER MIL-G-45204 OVER .000050 MIN. NICKEL PER QQ-N-290
   - SHELL: YELLOW CHROMATE OVER ZINC PER ASTM B633
3. CONTACT ARRANGEMENT:
   - (32) SOLDER CUP SIGNAL CONTACTS (SUPPLIED IN HOUSING)
   - (4) COAXIAL OR POWER CONTACTS (NOT SUPPLIED)
4. MAXIMUM INSERTION FORCE CONNECTOR: 18 LBS.

PER ASME Y14.5M-1994
UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES [MM]
TOLERANCES:
DECIMALS .XX ± .01/0.254
.XXX ± .005/0.127
ANGLES ± 2°
SCALE: 1:1

CUSTOMER DRAWING

DRAWN	DATE	CHECKED	DATE
KJT	03/08/00	JH	3/8/00
APPROVED	DATE	APPROVED	DATE
JMC	3/8/00	JED	3/8/00

Litton
Winchester/Retconn 400 Park Road Watertown, Connecticut 06795

TITLE: 36W4P D-SUB CONNECTOR WITH BRACKEWTS

A	RM36W4P-1003	SHT. 1 OF 1	REV. E

June 2006 - This drawing became the property of Winchester Electronics Corporation, Wallingford, CT.