



Metal thin film chip resistors (precision)

■ RR series

Features

- Excellent characteristics in resistance tolerance, temperature coefficient of resistance, current noise, and linearity

Applications


- Any electronics applications that require accuracy and reliability such as automotive electronics, industrial test and measurement, consumer electronics and many others.

Specifications

* Stocked items: E-24 series (TCR P and Q, resistance tolerance D), other E-24 and E-96 series are made to order.

Dimensions

unit : mm




Dimension (inch)	RR0306 (0201)	RR0510 (0402)	RR0816 (0603)	RR1220 (0805)	RR1632 (1206)	RR2632 (1210)
L	0.60±0.05	1.00±0.05	1.60±0.20	2.00±0.20	3.20±0.20	3.20±0.20
W	0.30±0.05	0.50±0.05	0.80±0.20	1.25±0.20	1.60±0.20	2.60±0.20
A	0.12±0.05	0.20±0.10	0.30±0.20	0.40±0.20	0.50±0.20	0.50±0.20
B	0.12±0.05	0.25±0.05	0.30±0.20	0.40±0.20	0.45±0.20	0.45±0.20
T	0.23±0.03	0.35±0.05	0.40±0.10	0.40±0.10	0.40±0.10	0.40±0.10

Electrical characteristics

Series name	RR0306	RR0510	RR0816	RR1220	RR1632	RR2632
power	1/20W	1/16W	1/16W	1/10W	1/8W	1/4W
E series offered	E-24	E-24, E-96				
Resistance range (Ω)	10~30, 33~22k	10~91, 100~100k	10~91, 100~360k	10~91, 100~1M	10~47, 51~1M, 100~200k	10~47, 51~1M, 100~200k
Resistance tolerance (%)	±0.1% (B), ±0.5% (D), ±1.0% (F)	—, —, —	—, —, —	—, —, —	—, —, —	—, —, —
Temperature coefficient of resistance (ppm/°C)	±5 (V), ±10 (N), ±25 (P), ±50 (Q), ±100 (R)	—, —, —	—, —, —	—, —, —	—, —, —	—, —, —
Maximum voltage	15V	25V	75V	100V	150V	200V
Operating temperature	-55°C ~ 125°C					
Packaging	5,000pcs, 10,000pcs	—, —	—, —	—, —	—, —	—, —

Contact us for the jumper resistor in RR0816 size (part number: RL0816-JMP)

Part numbering system

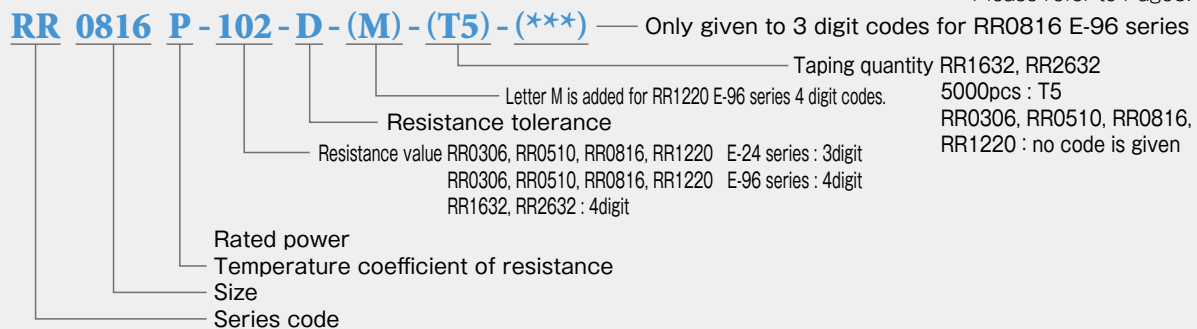

* Please refer to Page6.