



# RS.RSR series

## SLIDE TYPE DIP SWITCH



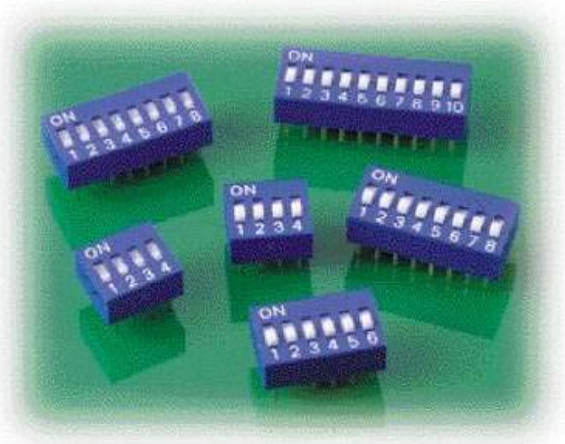


### RS & RSR CONSTRUCTION

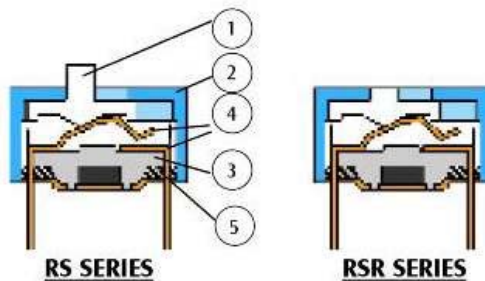


1. Terminal plating by gold gives excellent results when soldering.
2. RS series (raised actuator) and RSR series (recessed actuator)
3. Low contact resistance, and self-clean on contact area.
4. Double contacts offer high reliability.
5. All materials are UL94V-0 grade fire retardant plastics.

| ITEM | Description      | Materials                 | Treatment        |
|------|------------------|---------------------------|------------------|
| 1    | Actuator         | UL94V-0 PBT Thermoplastic | White            |
| 2    | Cover            | UL94V-0 PBT Thermoplastic | Blue, Red, Black |
| 3    | Base             | UL94V-0 PBT Thermoplastic | Black            |
| 4    | Terminal Contact | Phosphor bronze           | Gold Plating     |
| 5    | Potting          | Epoxy                     | Black            |

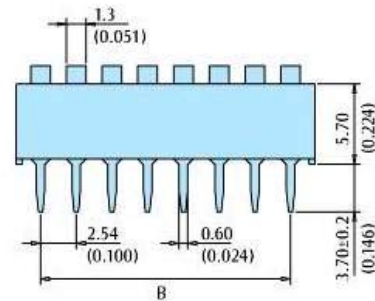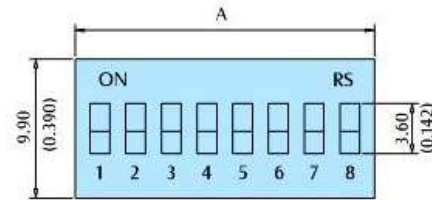


### P.C.B. LAYOUT



### CIRCUIT DIAGRAM

### TERMINAL TYPE

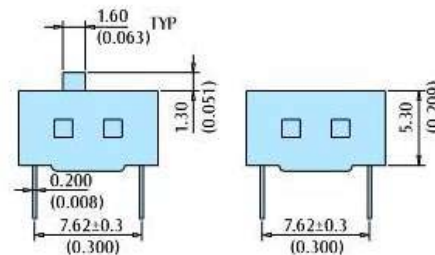


### RS SERIES

### RSR SERIES

## MODEL

| PART NO.  | NO. OF POS | DIM A       |
|-----------|------------|-------------|
| RSR/RS-01 | 01         | 3.84 0.151  |
| RSR/RS-02 | 02         | 6.08 0.239  |
| RSR/RS-03 | 03         | 8.92 0.351  |
| RSR/RS-04 | 04         | 11.16 0.439 |
| RSR/RS-05 | 05         | 13.70 0.539 |
| RSR/RS-06 | 06         | 16.24 0.639 |
| RSR/RS-07 | 07         | 19.08 0.751 |
| RSR/RS-08 | 08         | 21.32 0.839 |
| RSR/RS-09 | 09         | 24.16 0.951 |
| RSR/RS-10 | 10         | 26.40 1.039 |
| RSR/RS-12 | 12         | 31.48 1.239 |

## HOW TO ORDER

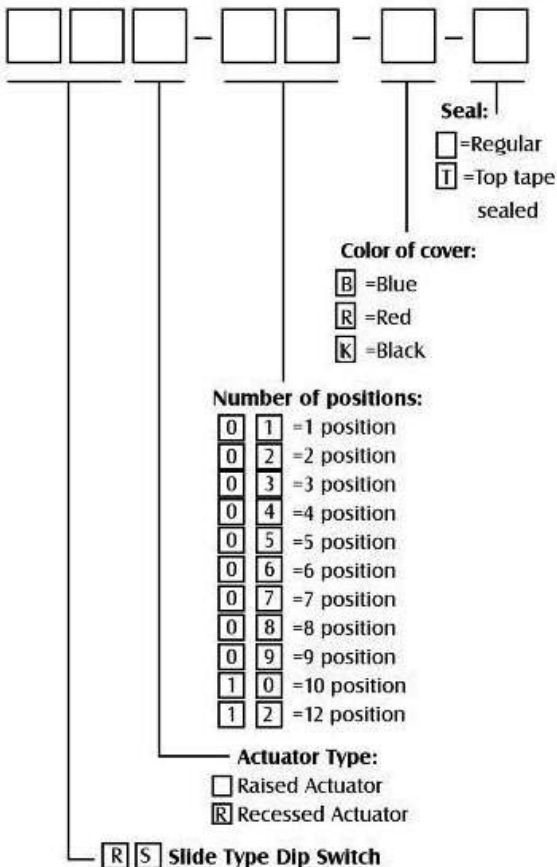

**Example:** RS-08-B-T is a slide type dip switch, raised actuator, 8 position, blue cover with top tape sealed.

## PACKING

All Dip Switches are shipped in standard IC tubes with all poles in "OFF" position.

## SPECIFICATION

### ELECTRICAL

Electrical life: 2000 operation cycles per switch 24VDC, 25mA.

Non-Switching Rating: 100mA, 50 VDC

Switching Rating: 25mA, 24VDC.

Contact resistance: (a) 50mΩ max. at initial

(b) 100mΩ max. after life test.

Insulation resistance: 100MΩ min. (at 500VDC)

Dielectric Strength: 500VAC/1 minute.

Capacitance: 5pF max.

Circuit: Single pole single throw

### MECHANICAL

Mechanical life: 2000 operations per cycle switch

Operation Force: 800gf max.

Stroke: 2.0mm

Operation Temp: -20° C to +70° C

Storage Temp: -40° C to +85° C

Vibration Test: MIL-STD-202F METHOD 201A

Frequency: 10-55-10Hz/1 min

Directions: X, Y, Z, three mutually perpendicular directions.

Time: 2 hours each direction.

High reliability.

Shock Test: MIL-STD-202F METHOD 213B.

CONDITION A

GRAVITY: 50G (peak value), 11 m/sec.

Direction and times: 6 sides and three times in each direction. High reliability.

### SOLDERING AND CLEANING PROCESSES

For best results, please follow these recommendations:

Keep all switch contacts in their "OFF" position for all operations.

**WAVE SOLDERING:** Recommended solder temperature at 500 F (260° C) max. 5 seconds.

**HAND SOLDERING:** Use a soldering iron of 30 watts, controlled at 608 F (320° C) approximately 2 seconds while applying solder.

**CLEANING PROCESS:** Flux clean using force rinse, high agitation or triple bath cleaning method. Freon TF or TE give excellent results. When vapor methods are used, do not subject the switch to solvents at temperatures above 125 F (51° C).