
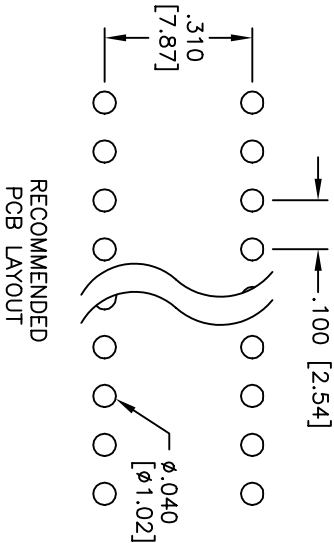


Rev	AWO #	Description	Date	Appr
-		RELEASED	11/17/04	

APPROVED: _____

DATE: _____ TITLE: _____

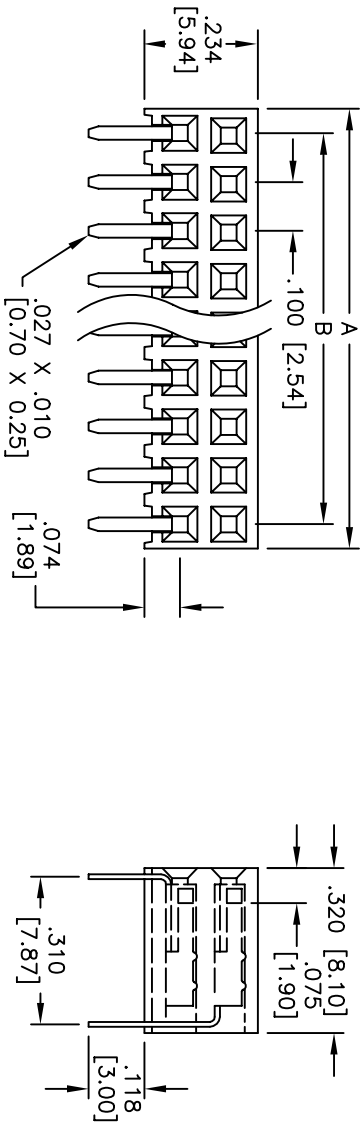

SPECIFICATIONS:

Material:

Insulator: PBT, glass reinforced, rated UL 94V-0

Insulator color: Black

Contacts: Phosphor Bronze

Plating:

5u" Gold nom. over Nickel underplate overall

Electrical:

Operating voltage: 250 VAC max

Current rating: 3 Amps max

Insulation resistance: 5000 Mohms min @ 500 VDC

Dielectric withstanding voltage: 1000 VAC for 1 minute

Temperature Rating:

Operating temperature: -40°C to +105°C

A = .100 [2.54] X No. of Positions
B = .100 [2.54] X No. of Spaces

RECOMMENDED
PCB LAYOUT

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED				ADAM TECH			
INCHES				909 Rahway Avenue, Union, NJ 07083			
Holes				Phone: 908-687-5000 Fax: 908-687-5710			
.X	± .10	ØXX	± .10	RECEPTACLE STRIP, 100 DUAL ROW SIDE ENTRY, 5u" GOLD PLATED			
.XX	± .020	ØXXX	± .015				
.XXX	± .015	ØXXXX	± .010				
APPROVALS				TITLE			
DRAWN	SS	11/17/04		SIZE			
CHECKED				PART NO.			
APPROVED				REV.			
REF:				SCALE: NTS			
				SHEET 1 OF 1			