
RZN 4408-K

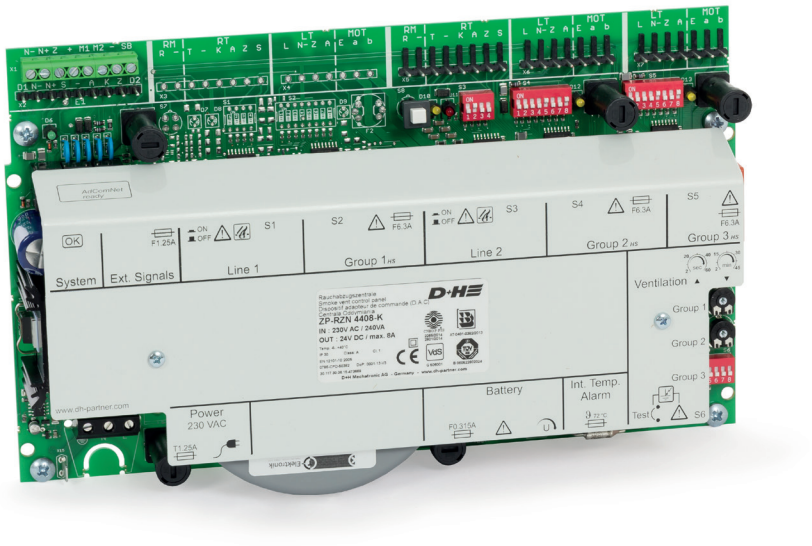

Performance features


- Compact SHEV control panel - AdComNet ready
- Up to 8 A total drive current
- Stabilised output voltage
- Switchable SHEV safety functions: Fault equal to alarm, SHEV retriggering function and smoke detector remote reset
- Option to combine SHEV / building alarm function
- Integrated comfort functions for daily ventilation
- 1 slot for an additional module
- Optional connection to rain detectors or wind / rain sensors without an additional module
- Connection of up to 8 SHEV operation panels and 14 fire detectors per line (Only detectors permitted by D+H may be used)
- Min. 72 hr battery backup supply

Accessories

Batteries	Sheet steel housing	Plastic housing	SHEV operation panels	Sensor systems
				

We reserve the right to make changes.
©2018 D+H Mechatronic AG, Ammersbek

Example of application

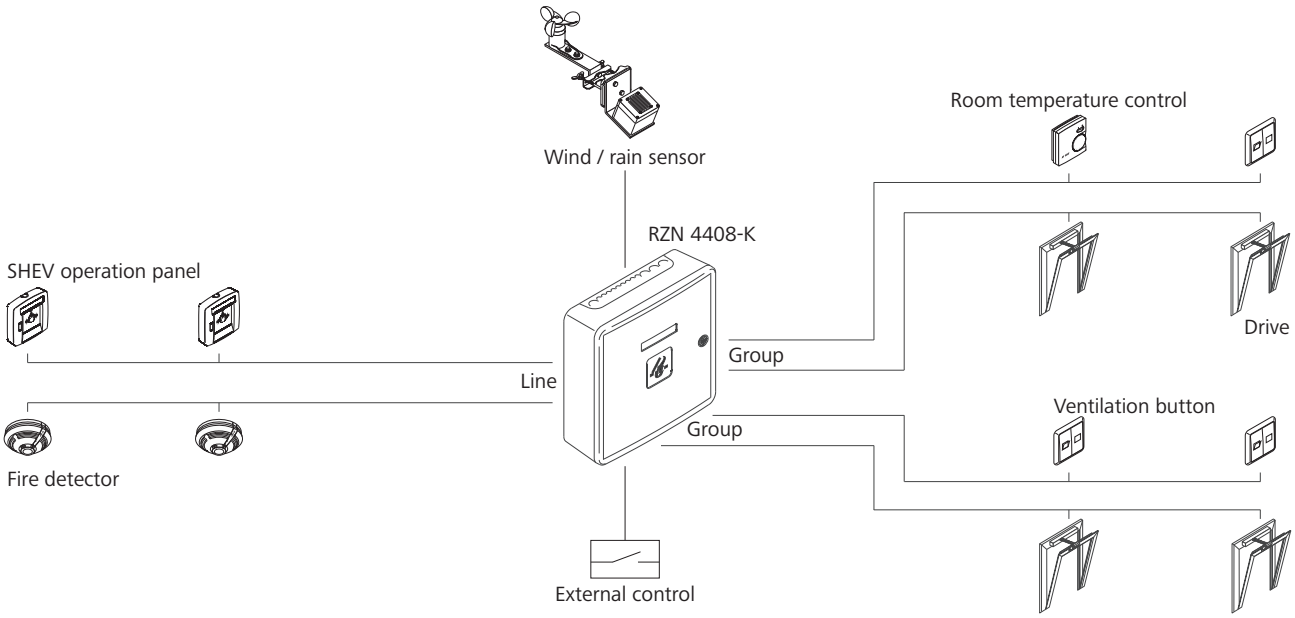

Technical data

Supply	230 V AC / 50 Hz / 240 VA
Stand-by power	4.5 W
Output	24 V DC / 8 A
Ripple	< 2 Vss
Mode of operation monitoring	Continuous duty
Mode of operation Alarm / Ventilation	Short-time duty 30 % duty cycle
Temperature range	-5 °C ... +40 °C
Line / Group	1 / 2
Battery type	Typ 8 (2x)

Batteries must be ordered separately.

Approvals / Certificates

Find out about permission details from your D+H Partner

VdS

0786-CPD-50382

Article also available with the following permissions under other article numbers. Technical data may deviate.

CNBOP-PIB

Design

Type	Art. No.	Type of protection	W x H x D	Weight	Remark
ZP-RZN 4408-K	30.117.30			2.90 kg	With alarm devices = Akku Typ 3 (2x)
RZN 44xx-K/M	30.104.70				Variable equipment possible
GEH-S-RWA	30.105.30	IP 54	400 x 300 x 120 mm	7.25 kg	Sheet steel housing
GEH-KST	63.600.81	IP 30	310 x 310 x 100 mm	1.40 kg	Plastic housing