2A, 600V - 1000V Surface Mount Rectifiers

FEATURES

- Glass passivated chip junction
- Ideal for automated placement
- Low forward voltage drop
- Low leakage current
- Compliant to RoHS Directive 2011/65/EU and in accordance to WEEE 2002/96/EC
- Halogen-free according to IEC 61249-2-21



SMAF

Pb-Free

RoHS COMPLIANT

HALOGEN FREE

MECHANICAL DATA

Case: SMAF

Molding compound: UL flammability classification rating 94V-0

MSL1: per J-STD-020

Packing code with suffix "G" means green compound (halogen-free)

Terminal: Matte tin plated leads, solderable per JESD22-B102

Meet JESD 201 class 1A whisker test

Polarity: Indicated by cathode band

Weight: 35mg (approximately)

Not Recommended

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS (T_A=25°C unless otherwise noted)					
PARAMETER	SYMBOL	S2JF	S2KF	S2MF	UNIT
Maximum repetitive peak reverse voltage	V_{RRM}	600	800	1000	V
Maximum RMS voltage	V_{RMS}	420	560	700	V
Maximum DC blocking voltage	V_{DC}	600	800	1000	V
Maximum average forward rectified current	$I_{F(AV)}$	2			A
Peak forward surge current, 8.3 ms single half sine-wave superimposed on rated load	I_{FSM}	50			A
Maximum instantaneous forward voltage (Note 1) @ 2 A	V_F	1.1			V
Maximum reverse current @ rated V_R T_J=25°C T_J=125°C	I_R	5 50			μA
Typical reverse recovery time (Note 2)	t_{rr}	1.8			μs
Typical junction capacitance (Note 3)	C_J	6			pF
Typical thermal resistance	$R_{\theta JL}$ $R_{\theta JA}$	20 65			°C/W
Operating junction temperature range	T_J	- 55 to +150			°C
Storage temperature range	T_{STG}	- 55 to +150			°C

Note 1: Pulse test with PW=300μs, 1% duty cycle

Note 2: Test conditions: I_F=0.5A, I_R=1.0A, I_{RR}=0.25A

Note 3: Measured at 1 MHz and applied reverse voltage of 4.0V DC.

ORDERING INFORMATION				
PART NO.	PACKING CODE	PACKING CODE SUFFIX	PACKAGE	PACKING
S2xF (Note 1, 2)	R3	G	SMAF	3,000 / 7" Plastic reel
	R2		SMAF	10,000 / 13" Paper reel

Note 1: "x" defines voltage from 600V (S2JF) to 1000V (S2MF)

Note 2: Whole series with green compound

EXAMPLE				
EXAMPLE P/N	PART NO.	PACKING CODE	PACKING CODE SUFFIX	DESCRIPTION
S2JF R3G	S2JF	R3	G	Green compound

RATINGS AND CHARACTERISTICS CURVES

(T_A=25°C unless otherwise noted)

FIG.1 FORWARD CURRENT DERATING CURVE

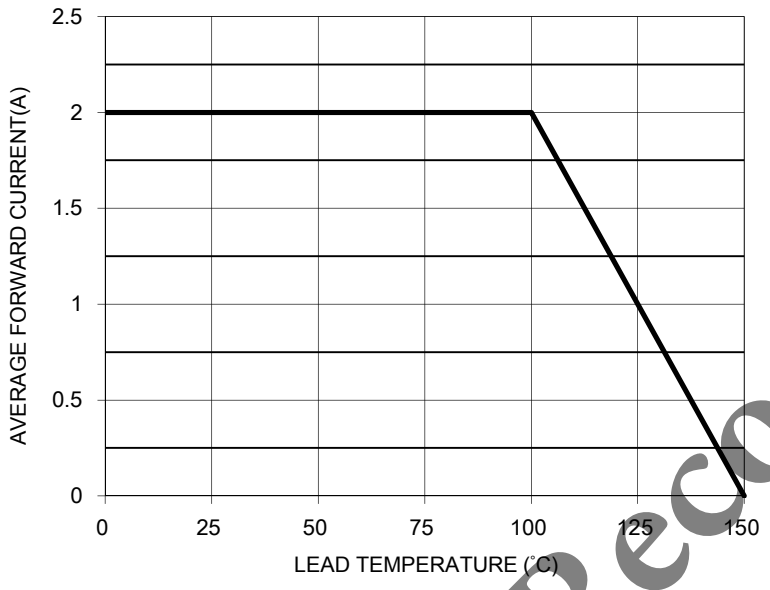


FIG. 2 TYPICAL REVERSE CHARACTERISTICS

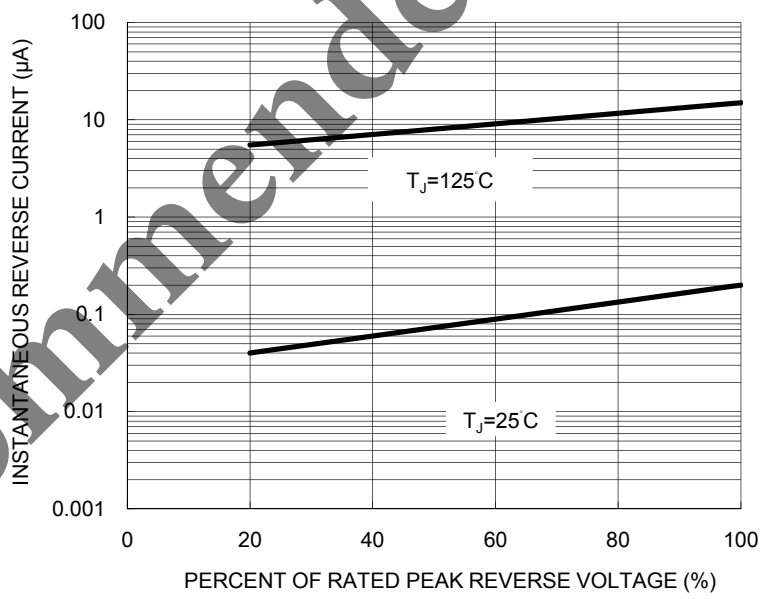


FIG. 3 MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT


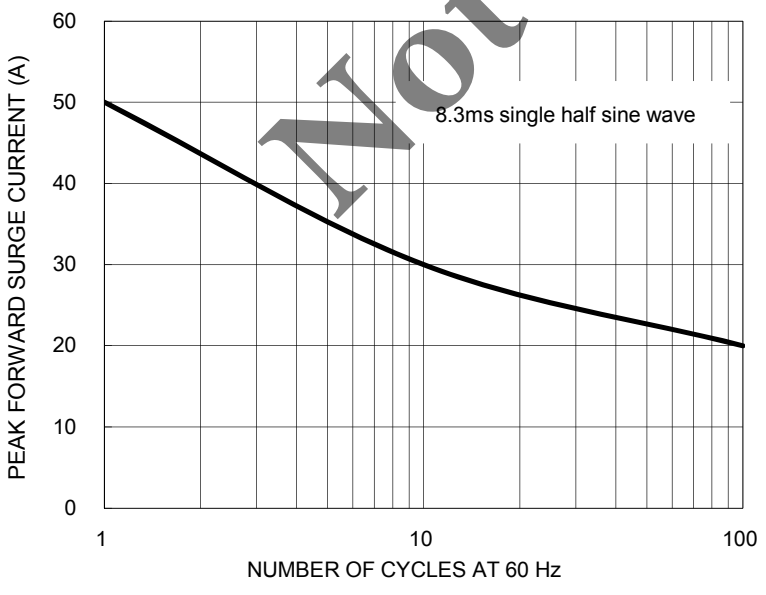



FIG. 4 TYPICAL FORWARD CHARACTERISTICS

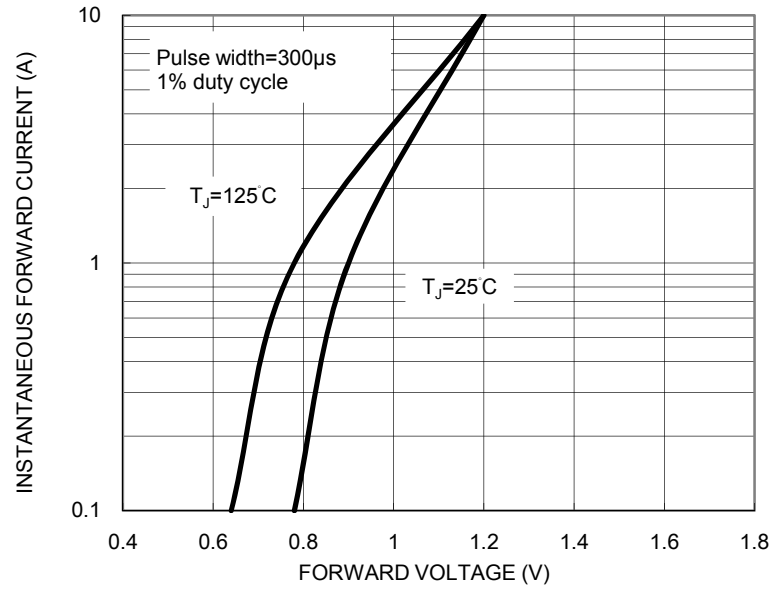

Not Recommended

PACKAGE OUTLINE DIMENSIONS

SMAF

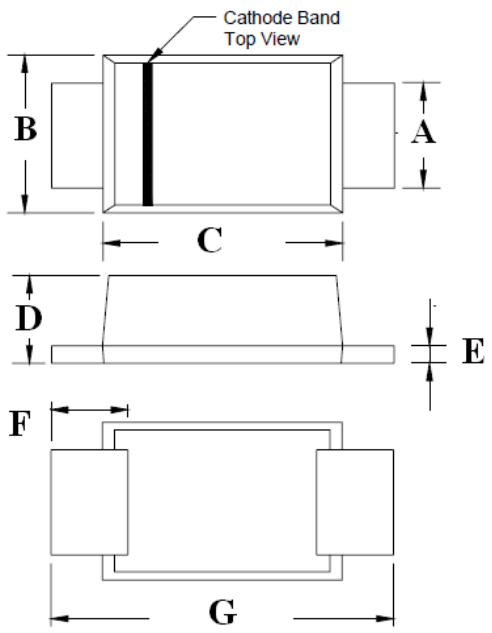

DIM.	Unit (mm)		Unit (inch)	
	Min	Max	Min	Max
A	1.25	1.60	0.049	0.063
B	2.40	2.80	0.094	0.110
C	3.30	4.30	0.130	0.169
D	0.90	1.10	0.035	0.043
E	0.10	0.25	0.004	0.010
F	0.70	1.20	0.028	0.047
G	4.40	5.20	0.173	0.205

MARKING DIAGRAM



P/N = Specific Device Code
G = Green compound Code
YW = Date Code
F = Factory Code

Not Recommended

Not Recommended

Notice

Specifications of the products displayed herein are subject to change without notice. TSC or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, to any intellectual property rights is granted by this document. Except as provided in TSC's terms and conditions of sale for such products, TSC assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of TSC products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify TSC for any damages resulting from such improper use or sale.