

Customer Information Sheet

DRAWING No.: S70-22010X045R


IF IN DOUBT - ASK

©




NOT TO SCALE

THIRD ANGLE PROJECTION


ALL DIMENSIONS IN mm

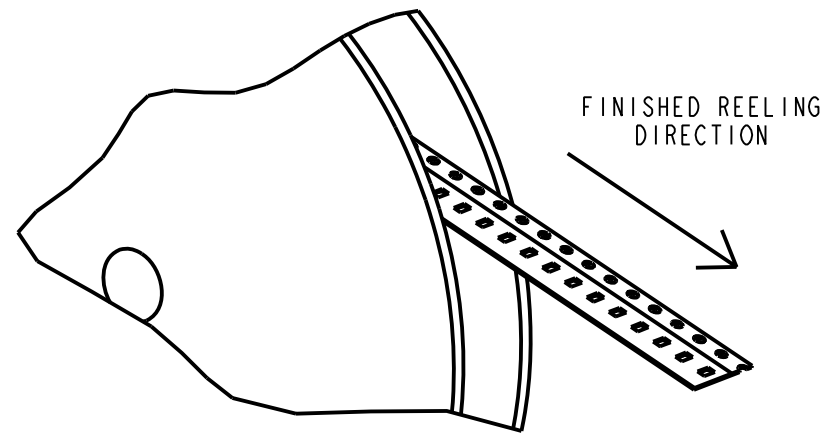


COMPONENT DETAILS

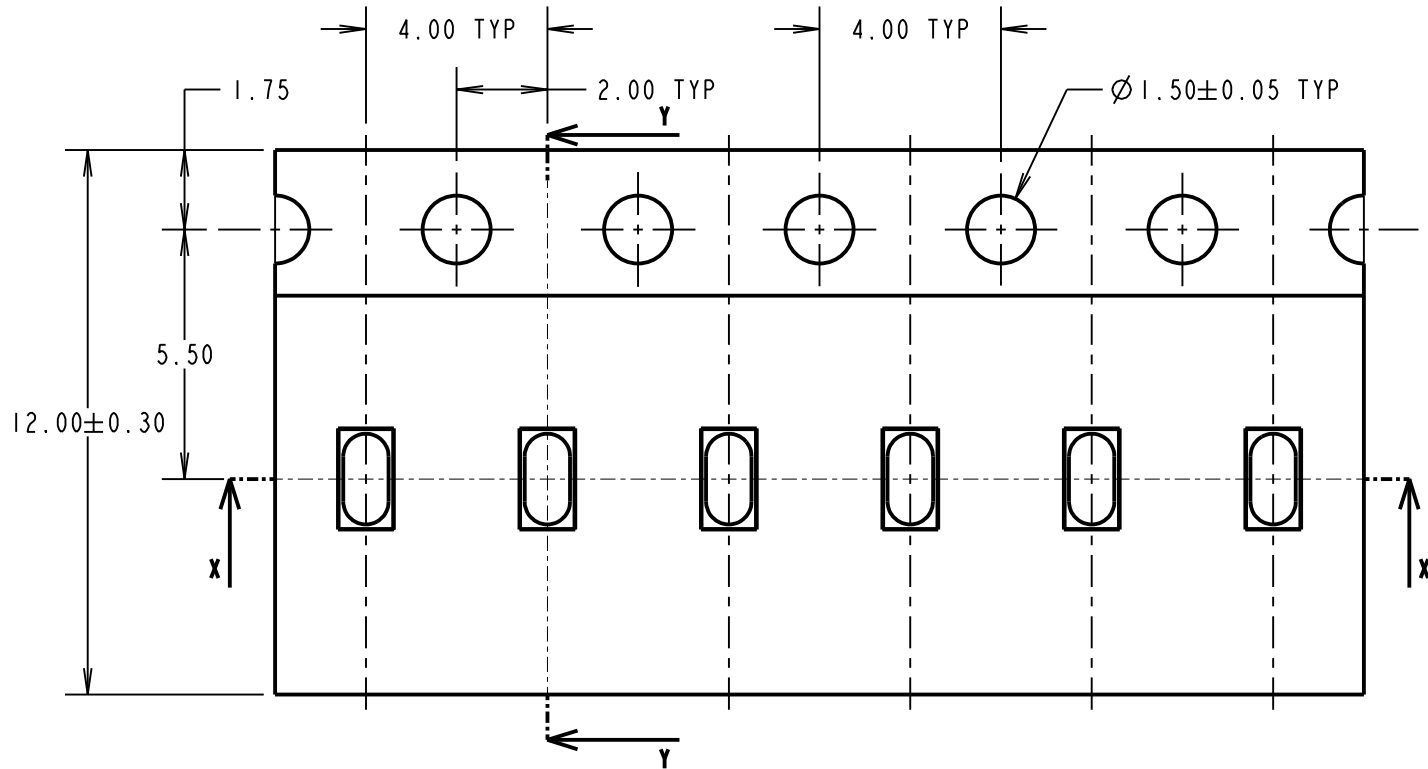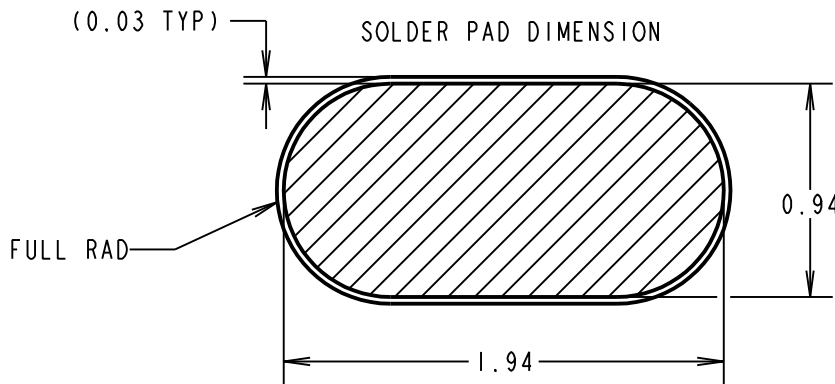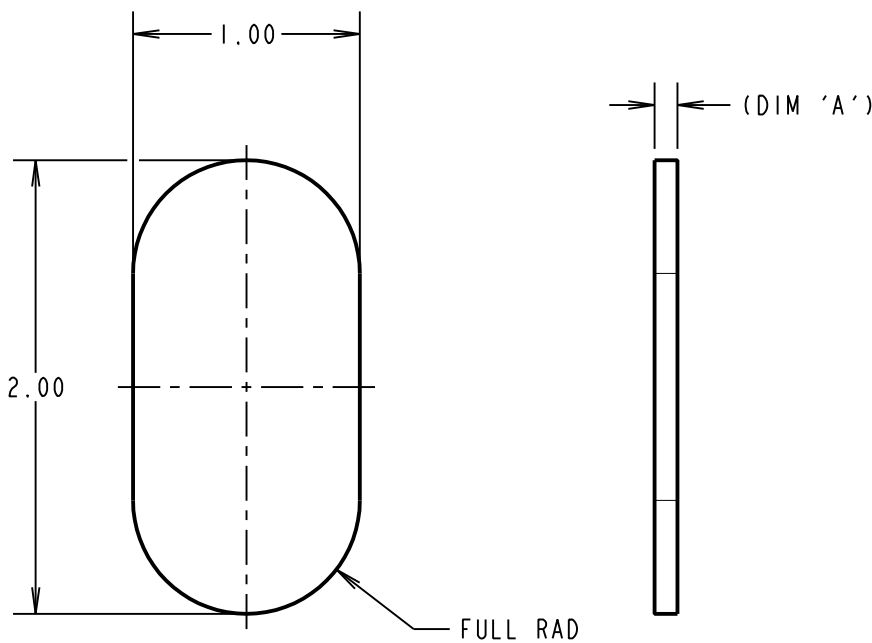


SECTION X-X

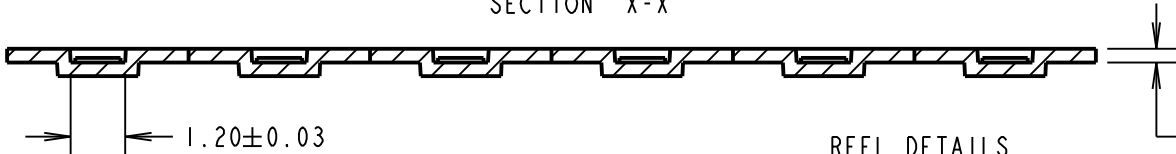

REEL DETAILS

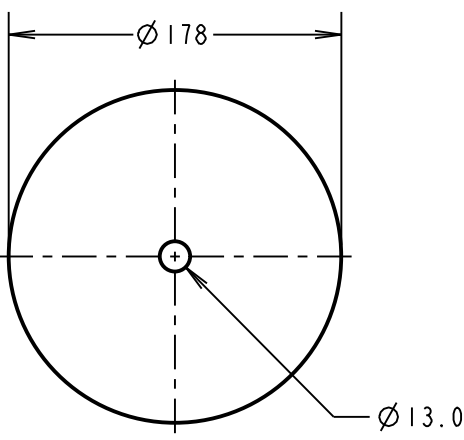

SECTION Y-Y

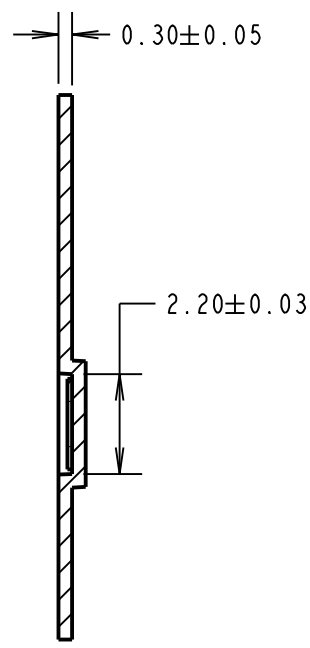

PART	DIM 'A'
S70-220101045R	0.10
S70-220102045R	0.20

ORDER CODE:
S70-22010XX45R

SIZE:
LENGTH
WIDTH
DIM 'A' = THICKNESS

SPECIFICATIONS:
FINISH:
0.025 - 0.075µ GOLD OVER 1.50 - 3µ NICKEL
ELECTRICAL:
CURRENT RATING = 6.0A
CONTACT RESISTANCE = 0.15mΩ
ENVIRONMENTAL:
OPERATING TEMPERATURE = -40°C TO +85°C

NOTES:
1. QUANTITY OF COMPONENTS PER REEL = 9000.
2. PRODUCT IS TAPE AND REELED IN GENERAL ACCORDANCE WITH EIA-481 (ELECTRONIC INDUSTRIES ASSOCIATION).

MSP	3	21.08.17	20727
NAME	ISS.	DATE	C/NOTE
APPROVED: M.PERREN			
CHECKED: M.PLESTED			
DRAWN: M.PERREN			
CUSTOMER REF.:			
ASSEMBLY DRG:			

HARWIN

www.harwin.com
technical@harwin.com

THIS DRAWING AND ANY INFORMATION OR DESCRIPTIVE MATTER SET OUT HEREON ARE CONFIDENTIAL AND COPYRIGHT PROPERTY OF THE HARWIN GROUP AND MUST NOT BE DISCLOSED, LOANED, COPIED OR USED FOR MANUFACTURING, TENDERING OR FOR ANY OTHER PURPOSE WITHOUT THEIR WRITTEN PERMISSION.

TOLERANCES
X. = ±1mm
X.X = ±0.50mm
X.XX = ±0.10mm
X.XXX = ±0.01mm
ANGLES = ±5°
UNLESS STATED

MATERIAL:
BERYLLIUM COPPER
FINISH: CLEAN
S/AREA: mm²

TITLE:
SMT POGO PIN CONTACT PAD
DRAWING NUMBER:
S70-22010XX45R
SHT 2 OF 2