SA06H Series 30 Watts Switching Adapter

FEATURES



- ●Cispr 22'B', Vcci'B', Fcc'B' Compliance
- ●Light Weight: 220g only
- ●Efficiency 84%
- ●Over-Voltage Protective Installation
- ●Short-circuit Protective Installation
- ●Protection Type: Auto-Recover
- ●Operating Temperature 0℃~40℃

SPECIFICATION

Item \ Model	SA06H12~17	SA06H17~24
Output Voltage	12V~17V	17V~24V
Output Rating	30W Max	30W Max
Input Voltage	AC 90~264V	
Input Frequency	47~63Hz	
Input Current	1.0A Maximum	
Inrush Current	60A Maximum	
Line Regulation	2% Maximum	
Load Regulation	± 5%	
Ripple & Noise	1% Maximum	
Efficiency	84% Typical	86% Typical
Temperature Coefficient	0.05%/℃	
Over-Voltage Protection	24V~34V Maximum	34V~48V Maximum
Operating Temperature	0~40℃	
Storage Temperature	-20~85℃	
Safety Description	UL, CUL, TUV, CB	

(＊): Under Development (I/P): In Process

Bothhand USA. e-mail: sales@bothhandusa.com http://www.bothhand.com


462 Boston St - Topsfield, MA 01983 - Phone: 978-887-8050 - Fax: 978-887-5434

ORDERING INFORMATION

SA06H [1 2] - [1] [A]

- [1 2] — Output Voltage
- [1] [A] — Output Plug List

MECHANICAL

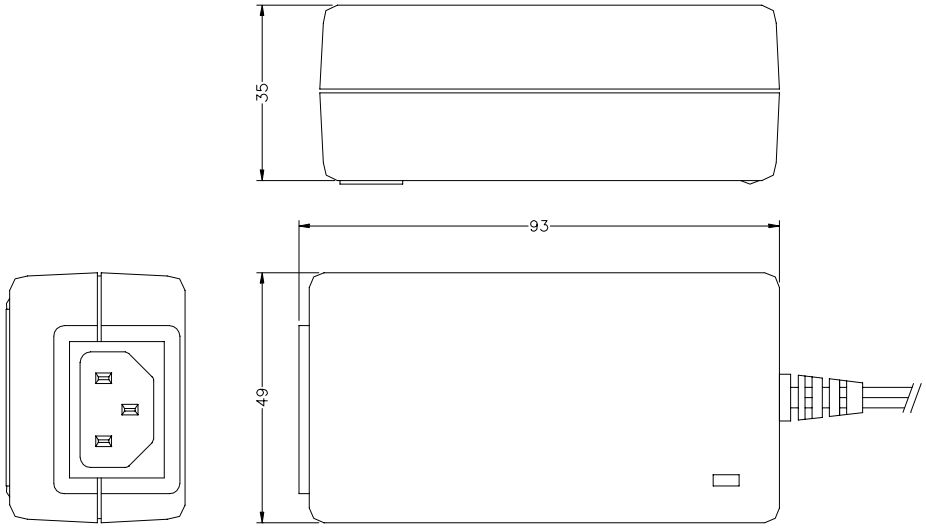

Unit: m.m.

Standard Output Cable:
18AWG, UL SPT-1, 1200mm