

**SB240**

Preliminary

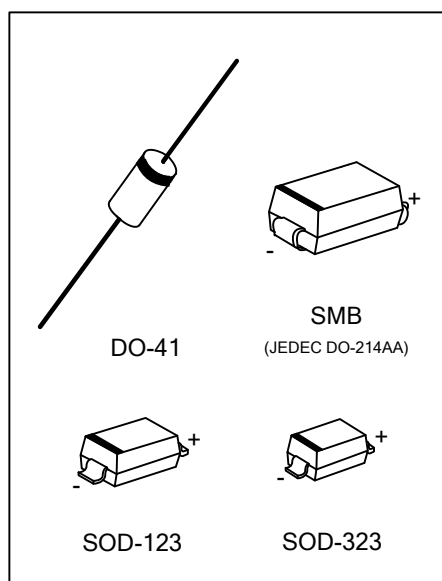
DIODE**2.0A SCHOTTKY BARRIER
RECTIFIER****■ DESCRIPTION**

The UTC **SB240** is a Schottky Rectifier with high current capacity and low forward voltage.

The UTC **SB240** is suitable for polarity protection, low voltage and high frequency inverters and free wheeling applications

■ FEATURES

- * High Current Capability
- * Low Forward Voltage

**■ ORDERING INFORMATION**

Ordering Number		Package	Pin Assignment		Packing
Lead Free	Halogen Free		1	2	
SB240L-SMB-R	SB240G-SMB-R	SMB	K	A	Tape Reel
SB240L-CA2-R	SB240G-CA2-R	SOD-123	K	A	Tape Reel
SB240L-CB2-R	SB240G-CB2-R	SOD-323	K	A	Tape Reel
SB240L-Z41-R	SB240G-Z41-R	DO-41	K	A	Tape Reel

Note: Pin Assignment: A: Anode, K: Cathode

SB240L-SMB-R (1) Packing Type (2) Package Type (3) Lead Free	(1) R: Tape Reel (2) SMB: SMB, CA2: SOD-123, CB2: SOD-323 Z41: DO-41 (3) L: Lead Free, G: Halogen Free
--	---

■ MARKING INFORMATION

PACKAGE	MARKING
SMB	Cathode Band for uni-directional Only UTC S B 2 4 0 → Date Code → L: Lead Free → G: Halogen Free
SOD-123 SOD-323	B2 → Lead Free

DO-41	SB240 → Cathode Band for uni-directional Only L: Lead Free G: Halogen Free → Date Code
-------	---

■ **ABSOLUTE MAXIMUM RATINGS** ($T_A=25^{\circ}\text{C}$ unless otherwise specified.)

PARAMETER	SYMBOL	RATINGS	UNIT
DC Blocking Voltage	V_R	40	V
Peak Repetitive Reverse Voltage	V_{RRM}	40	V
Working Peak Reverse Voltage	V_{RWM}	40	V
RMS Reverse Voltage	$V_{R(RMS)}$	28	V
Average Rectified Output Current	I_O	2.0	V
Non-repetitive Peak Forward Surge Current 8.3 ms Single Half-Sine-Wave	I_{FSM}	80	A
Operating Temperature	T_J	-65~+150	$^{\circ}\text{C}$
Storage Temperature	T_{STG}	-65~+150	$^{\circ}\text{C}$

Note: 1. Absolute maximum ratings are those values beyond which the device could be permanently damaged.

Absolute maximum ratings are stress ratings only and functional device operation is not implied.

2. Measured at ambient temperature at a distance of 9.5mm from the case.

3. Short duration test pulse used to minimize self-heating effect.

■ **THERMAL DATA**

PARAMETER		SYMBOL	RATINGS	UNIT
Junction to Ambient	SMB	θ_{JA}	60	$^{\circ}\text{C/W}$
	SOD-123		200	
	SOD-323		500	
	DO-41		50	

■ **ELECTRICAL CHARACTERISTICS** ($T_A=25^{\circ}\text{C}$ unless otherwise specified.)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Reverse Breakdown Voltage (Note 1)	$V_{(BR)R}$	$I_R=0.50\text{mA}$	40			V
Forward Voltage Drop (Note 3)	V_{FM}	$I_F=2.0\text{A}, T_J=25^{\circ}\text{C}$			0.50	V
		$I_F=2.0\text{A}, T_J=100^{\circ}\text{C}$			0.45	V
Leakage Current (Note 1)	I_{RM}	$V_R=40\text{V}, T_J=25^{\circ}\text{C}$			0.5	μA
		$V_R=40\text{V}, T_J=100^{\circ}\text{C}$			20	mA

Notes: 1. Short duration pulse test used to minimize self-heating effect.

2. Thermal resistance junction to case mounted on heatsink.

3. Pulse width $\leq 300\mu\text{s}$, duty cycle $\leq 2\%$.

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.