


塑封肖特基二极管

PLASTIC SCHOTTKY
BARRIER RECTIFIER

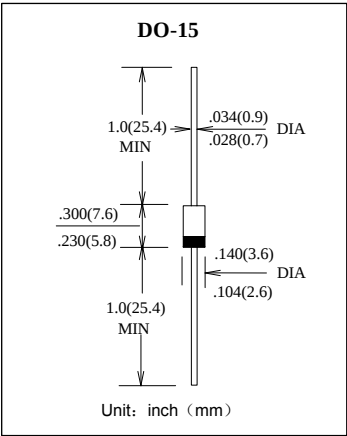

特征 Features

- 大电流承受能力。High Current Capability
- 正向压降低。Low Forward Voltage Drop
- 高温焊接保证 High temperature soldering guaranteed:
260℃/10 秒, 0.375" (9.5mm)引线长度。
260℃/10 seconds, 0.375" (9.5mm) lead length,
- 引线可承受5 磅 (2.3kg) 拉力。 5 lbs. (2.3kg) tension
- 引线 and 管体皆符合RoHS标准 。
Lead and body according with RoHS standard

机械数据 Mechanical Data

- 端子: 镀锡轴向引线 Terminals: Plated axial leads
- 极性: 色环端为负极 Polarity: Color band denotes cathode end
- 安装位置: 任意 Mounting Position: Any

极限值和电参数 TA = 25℃ 除非另有规定。

Maximum Ratings & Electrical Characteristics Ratings at 25℃ ambient temperature unless otherwise specified.

	符号 Symbols	SB 220	SB 230	SB 240	SB 250	SB 260	SB 280	SB 2100	单位 Unit
最大峰值反向电压 Maximum repetitive peak reverse voltage	V _{RRM}	20	30	40	50	60	80	100	V
最大反向有效值电压 Maximum RMS voltage	V _{R(RMS)}	14	21	28	35	42	56	70	V
最大直流阻断电压 Maximum DC blocking voltage	V _{DC}	20	30	40	50	60	80	100	V
最大正向平均整流电流 Maximum average forward rectified current	I _{FM}	2.0							A
最大正向电压降 Maximum forward voltage	IF = 2.0A V _F	0.5			0.7		0.85		V
正向峰值浪涌电流 8.3ms单一正弦半波 Peak forward surge current 8.3 ms single half sine-wave	I _{FSM}	50							A
最大反向漏电流 Maximum reverse current	TA = 25℃ TA = 100℃ I _R	0.5 10							mA
典型热阻 Typical thermal resistance	R _{θJA}	45							℃/W
典型结电容 VR = 4.0V f = 1.0MHz Type junction capacitance	C _j	120			90		80		pF
工作温度和存储温度 Operating junction and storage temperature range	T _j , T _{STG}	-55 --- +150							℃

特性曲线 Characteristic Curves

