


2WAY-0° POWER SPLITTER/COMBINERS

Designer's Kit **K2-SBTC+**

MINI-CIRCUITS DESIGNER'S KITS

SPEED UP
THE SOLUTION!

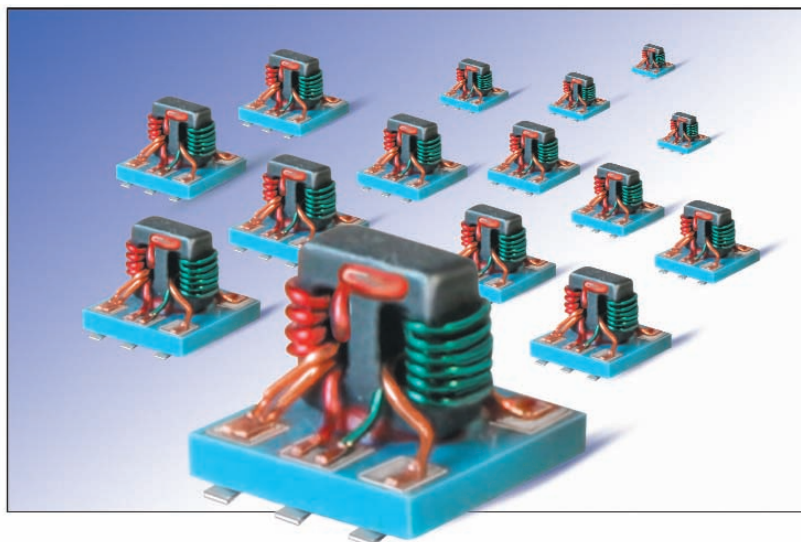

5 to 2500MHz

SBTC-L+ Features

- Wideband, 50Ω
- Excellent amplitude unbalance
- Low insertion loss
- Low cost
- Leaded, open style package
- Micro-miniature size .166" x .150" x .155"
- Temperature stable LTCC base
- Low Temperature Co-fired Ceramic



All models are RoHS compliant

\$51⁹⁵
only *ea. kit (3 models, 5 of each, 15 total)*

Kit K2-SBTC+ Electrical specifications of each model

Model	Freq. Range (MHz)	Isolation (dB)						Insertion Loss (dB) Above 3.0dB						Phase Unbalance (Degrees)			Amplitude Unbalance (dB)			Power Input (W) (as a splitter)
		L*		M		U*		L*		M		U*		L*		M		U*		
		f _L -f _U	Typ.	Min.	Typ.	Min.	Typ.	Min.	Typ.	Max.	Typ.	Max.	Typ.	Max.	Typ.	Max.	Typ.	Max.	Typ.	
SBTC-2-10L+	5-1000	29	20	25	18	21	16	0.3	0.7	0.3	0.8	0.5	1.4	3	3	5	0.6	0.5	0.5	0.5
SBTC-2-20L+	200-2000	—	—	20	14	—	—	—	—	0.8	2.2	—	—	—	10	—	—	0.8	—	0.5
SBTC-2-25L+	1000-2500	—	—	20	14	—	—	—	—	1.4	2.5	—	—	—	14	—	—	1.2	—	1.0

L = low range [f_L to $10f_L$] M = mid range [$10f_L$ to $f_U/2$] U = upper range [$f_U/2$ to f_U]

Protected under U.S. Patent 6,963,255

* When only specification for M range given, specification applies to entire frequency range.

Mini-Circuits®
ISO 9001 ISO 14001 CERTIFIED

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For quick access to product information see MINI-CIRCUITS CATALOG & WEB SITE

RF/IF MICROWAVE COMPONENTS

REV. OR
M104903
K2-SBTC+