


SCC2230-D08

In Production

REACH

Appearance & Shape

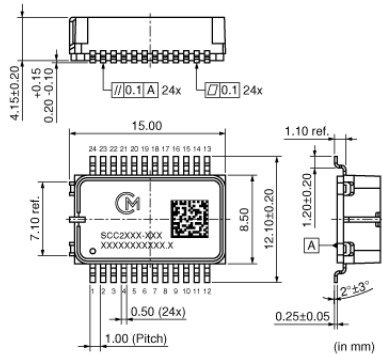

Packaging Information

Packaging	Specifications	Minimum Order Quantity
-05	330mm Embossed Tape	50

Attention
1.This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products n it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
2.This datasheet has only typical specifications because there is no space for detailed specifications.
Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.

SCC2230-D08



Specifications

Output Type	SPI
Supply Voltage	3.0V-3.6V
Axis	3 / 1(Z)
Maximum Range	+/-6g,+/-125deg/s
Sensitivity	5886 LSB/g or 0.010 deg/LSB 50 LSB/(degS)
Offset Temp. Characteristic	+/-10mg +/-0.8dps
Amplitude Response	10/60Hz 10/60Hz

Attention

1.This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
2.This datasheet has only typical specifications because there is no space for detailed specifications.
Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.