



A suffix of "-C" indicates halogen-free & RoHS Compliant



1206 (SOD-123)

FEATURES

Plastic package has Underwriters Laboratory Flammability
Classification 94V-0
Low profile package
Built-in strain relief
Metal to silicon rectifier , majority carrier conduction
Low power loss , High efficiency
High current capability
High surge capacity
RoHS Compliant Product

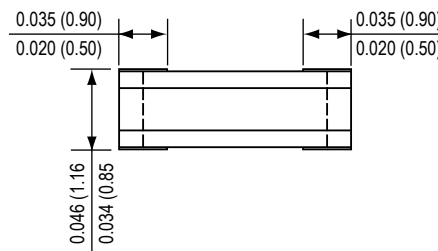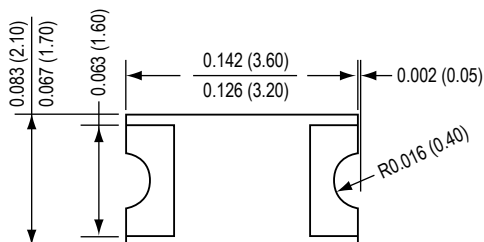

MECHANICAL DATA

Case : Packed with FRP substrate and epoxy underfilled

Terminals : Solder plated , solderable per MIL-STD-750,
Method 2026

Polarity : Laser marking

Weight : 0.02 gram

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating 25°C ambient temperature unless otherwise specified. Single phase half wave, 60Hz, resistive or inductive load. For capacitive load, derate current by 20%.

TYPE NUMBER	SYMBOLS	SCDF103	SCDF104	SCDF105	SCDF106	SCDF107	UNIT
Maximum Recurrent Peak Reverse Voltage	V _{RRM}	200	400	600	800	1000	V
Working Peak Reverse Voltage	V _{RMS}	200	400	600	800	1000	V
Maximum DC Blocking Voltage	V _{DC}	200	400	600	800	1000	V
Maximum Average Forward Rectified Current	I _(AV)	1					A
Peak Forward Surge Current, 8.3ms single half sine-wave superimposed on rated load (JEDEC method)	I _{FSM}	30					A
Maximum Instantaneous Forward Voltage at 1.0A	V _F	1.3					V
Maximum DC Reverse Current Ta=25℃ at Rated DC Blocking Voltage Ta=125℃	I _R	1 30					uA
Maximum reverse recovery time	T _{rr}	250			300		nS
Typical Junction Capacitance (Note 1.)	C _j	15					pF
Operating Temperature Range	T _J	-50 ~ +125					℃
Storage Temperature Range	T _{STG}	-65 ~ +150					℃

NOTES:

1. Measured at 1.0MHz and applied reverse voltage of 4.0 Volts.

2. Marking:

SCDF103 : 37ZD
SCDF104 : 37ZG
SCDF105 : 37ZJ
SCDF106 : 37ZK
SCDF107 : 37ZM

FIG.1 - FORWARD CURRENT DERATING CURVE

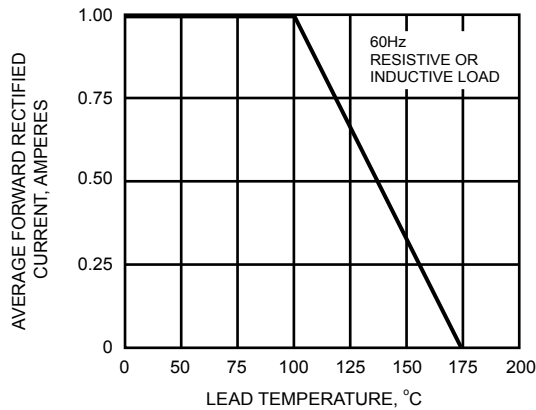


FIG.2 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

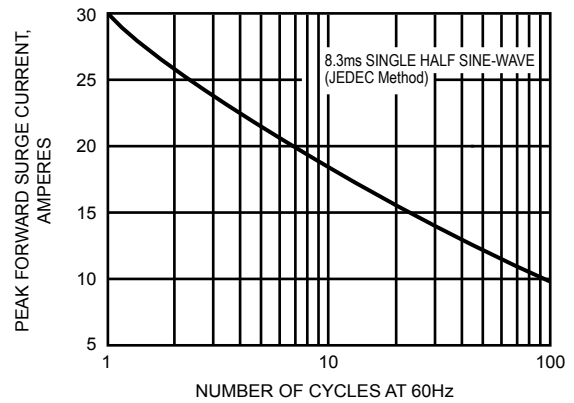


FIG.3 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

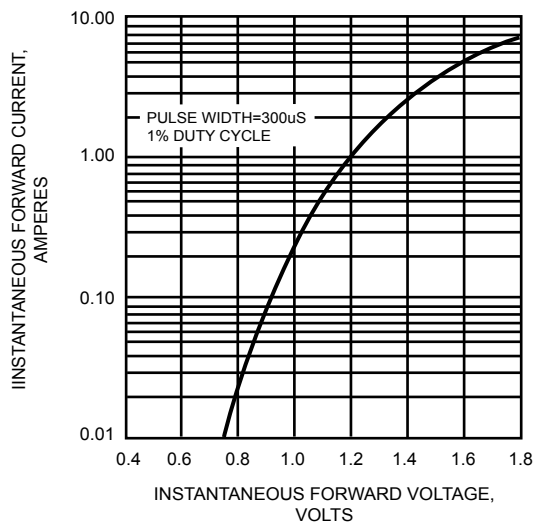


FIG.4 - TYPICAL REVERSE CHARACTERISTICS

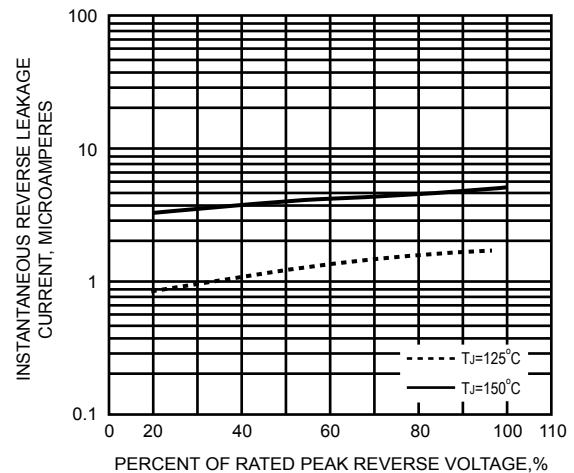


FIG.5 - TYPICAL JUNCTION CAPACITANCE

