




1. Open frame construction.



SCNR4012 Inductance decrease by current

DC current (mA)	Inductance (uH) - 221	Inductance (uH) - 400	Inductance (uH) - 180
10	60	4	1
100	55	3.5	1
500	10	2	1
1000	1	0.5	0.5
2000	-	0.1	0.1

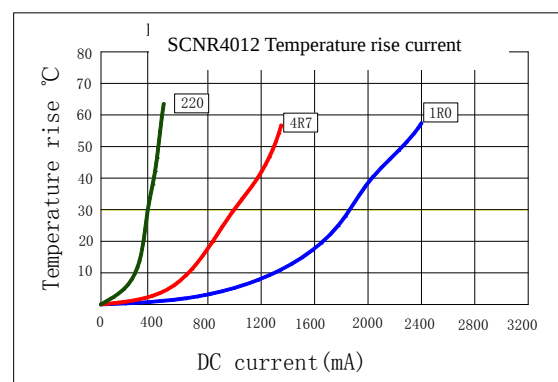

(4).The DC current that results in a 40°C temperature rise from 25°C ambient.

[Click here for QUANTITY PER REEL & PACKING INFORMATION](#)

Custom versions available upon request.

© 2019 Signal Transformer –Specification subject to change without notice. 12.19