

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: 0923152609
Status: Active
Overview: picoflex
Description: Picoflex® PF-50 IDT-to-IDT, 26 Circuits, 0.90m (2.95') Length

Documents:
[3D Model](#) [Product Specification PS-99020-0011 \(PDF\)](#)
[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)

General

Product Family	Cable Assemblies
Series	92315
Connector to Connector	Picoflex® IDT-to-IDT
Overview	picoflex
Product Name	Picoflex®

Physical

Cable Length	0.90m (2.95')
Circuits (Loaded)	26
Color - Resin	Natural
Gender	Female-Female
Lock to Mating Part	None
Material - Metal	Phosphor Bronze
Material - Plating Mating	Tin
Material - Plating Termination	Tin
Material - Resin	Polyester
Packaging Type	Bag
Pitch - Mating Interface (in)	0.050 In
Pitch - Mating Interface (mm)	1.27 mm
Plating min: Mating (µin)	80.00
Plating min: Mating (µm)	2.000
Plating min: Termination (µin)	80.00
Plating min: Termination (µm)	2.00
Single Ended	No
Termination Interface: Style	IDT or Pierce
Waterproof / Dustproof	No
Wire Insulation Diameter	N/A
Wire Size AWG	28
Wire/Cable Type	PVC, Ribbon Cable


Electrical

Current - Maximum per Contact	1.2A
Shielded	No
Voltage - Maximum	250V

Material Info

Reference - Drawing Numbers

Product Specification	PS-99020-0011
Sales Drawing	SD-92315-001

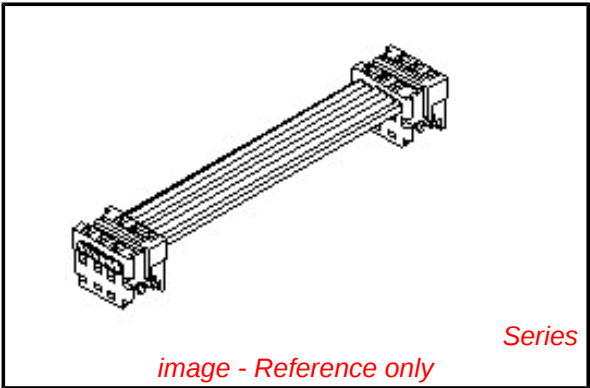

EU RoHS
ELV and RoHS
Compliant
REACH SVHC
Contains SVHC: No
Halogen-Free
Status
Not Reviewed



Need more information on product environmental compliance?


Email productcompliance@molex.com
For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series
92315Series

Mates With
Picoflex® PF-50 Header [90325](#) , [90800](#) ,
[90779](#) , [90715](#) , [90814](#)

PART NO. SEE CHART
Dwg. NO. SD-92315-001

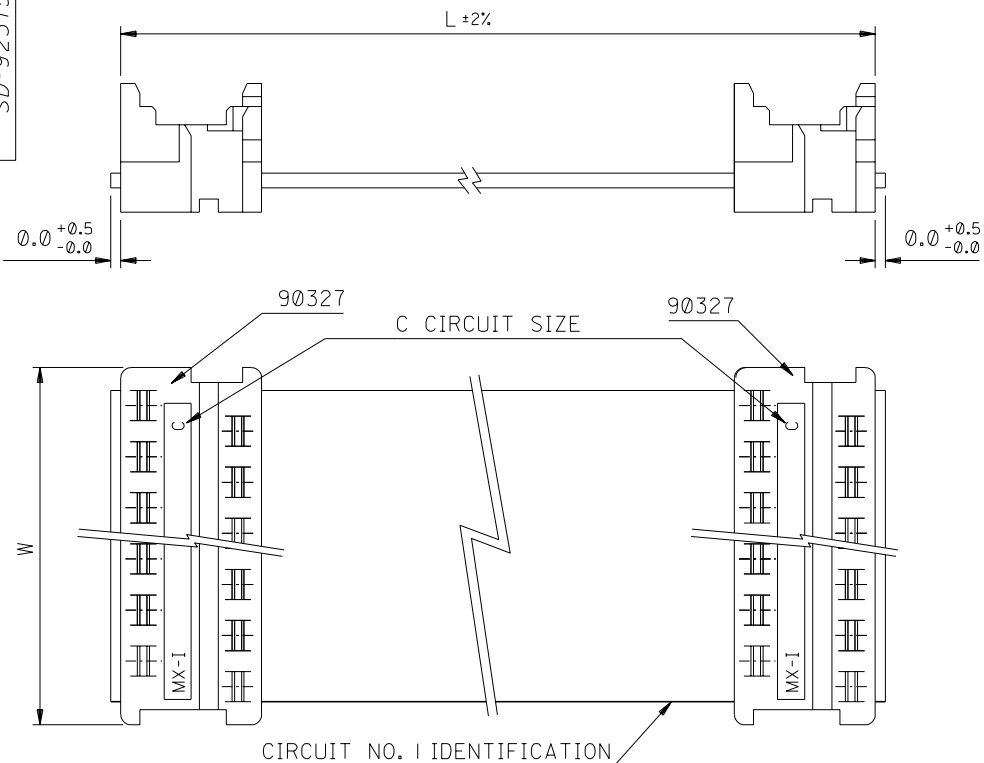

90327 CONNECTOR	
CIRCUIT SIZE	DIMENSION W
4	7.59
6	10.13
8	12.67
10	15.21
12	17.75
14	20.29
16	22.83
18	25.37
20	27.91
22	30.45
24	32.99
26	35.53

CABLE DETAILS:

28 AWG , 1.27 MM PITCH , 7 STRANDS WITH TINNED COPPER ,
GREY PVC INSULATION WITH A COLOURED POLARITY STRIPE
INDICATING CIRCUIT NO. 1 , UL 2651.

ORDERING INFORMATION

92315-****

CIRCUIT SIZE
LENGTH L IN CENTIMETRES

LENGTHS AVAILABLE FROM 6 CM TO 120 CM

e.g. 92315-1208 = 12 CIRCUIT
WITH LENGTH L OF 8 CM.

NOTE : FOR LENGTHS OF
100 CM , THE PART NO. IS 92315-***01
105 CM , THE PART NO. IS 92315-***02
110 CM , THE PART NO. IS 92315-***03
115 CM , THE PART NO. IS 92315-***04
120 CM , THE PART NO. IS 92315-***05

NOTES:

- SEE PRODUCT SPECIFICATIONS PS-99020-0011.
- SEE TERMINATION SPECIFICATION ES-99033-0001.
- SEE CABLE SPECIFICATION ES-99027-0006.
- HARNESSES WILL BE 100% ELECTRICALLY TESTED FOR
SHORTS AND DISCONTINUITIES.

ADDED OPTION EC NO. 2002-1088 DRAWING NO. 020607 CHK: / / APPR: / /		QUALITY SYMBOLS MAJOR = CRITICAL =	GENERAL TOLERANCES: (UNLESS SPECIFIED)		SCALE 4 : 1	DESIGN UNITS ☒ mm ☐ INCH	THIRD ANGLE PROJECTION 	DIMENSIONS: ☐ mm ☐ INCH ☒ mm ONLY		SHT	REV		
			mm	INCH	DRAWN BY & DATE MCURRAN 98/06/19	CHECKED BY & DATE AMcCANN 98/06/19		TITLE: PICO FLEX IDT TO IDT STANDARD ASSEMBLIES		REVISE ON CAD ONLY			
4 PLACES ±0.		ANGULAR: ± 1/2 °	±0.	±.	APPROVED BY & DATE MWILHITE 98/06/19		MATERIAL NO.		DRAWING NO.		SHEET NO. 1 OF 1		
3 PLACES ±0.			±0.	±.	CAD FILENAME S92315X1.DGN		SEE CHART		SD-92315-001				
2 PLACES ±0.			±0.	±.	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.		SIZE B						
1 PLACE ±0.		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS											