
# CRYSTAL CLOCK OSCILLATORS

**Data Sheet 0105C**

**Rev. F**



**Differential Positive ECL (DPECL)**
**Fast Edge**
## SD-A2920 Series

## Description


The **SD-A2920 Series** of quartz crystal oscillators provide DPECL Fast Edge compatible signals. Systems designers may now specify space-saving, cost-effective packaged PECL oscillators to meet their timing requirements.

## Features

- Wide frequency range–75.0MHz to 250.0MHz (Preliminary from180+MHz to 250MHz)
- User specified tolerance available
- Will withstand vapor phase temperatures of 253°C for 4 minutes maximum
- Space-saving alternative to discrete component oscillators
- High shock resistance, to 1000g
- 3.3 volt operation
- Metal lid electrically connected to ground to reduce EMI
- Fast rise and fall times <600 ps
- Low Jitter - Wavecrest jitter characterization available
- High Reliability - NEL HALT/HASS qualified for crystal oscillator start-up conditions
- Overtone technology
- High Q Crystal actively tuned oscillator circuit
- Power supply decoupling internal
- No internal PLL avoids cascading PLL problems
- High frequencies due to proprietary design
- Gold plated pads

### Electrical Connection

| Pin | Connection |
|---|---|
| 1 | Enable/Disable |
| 2 | N.C. |
| 3 | $V_{EE}$ /Ground |
| 4 | Output |
| 5 | /Output |
| 6 | $V_{CC}$ |

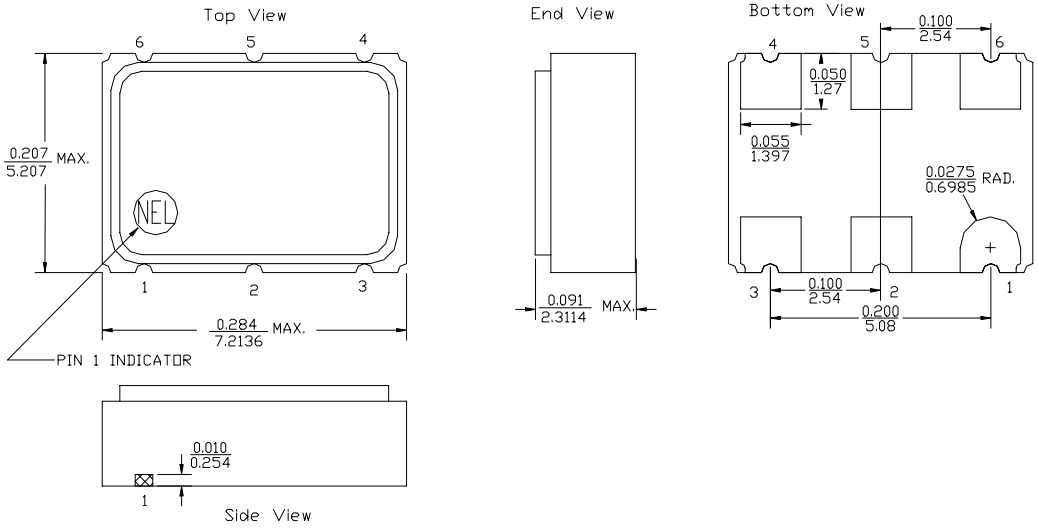



NEL FREQUENCY CONTROLS, INC.

357 Beloit Street, P.O. Box 457, Burlington, WI 53105-0457 U.S.A. Phone 262/763-3591 FAX 262/763-2881
Email: nelsales@nelfc.com www.nelfc.com

Rev. F

**SD-A2920 Series** Continued
Differential Positive ECL (DPECL) Fast Edge

## Operating Conditions and Output Characteristics

### Electrical Characteristics

| Parameter | Symbol | Conditions | Min | Typical | Max |
|---|---|---|---|---|---|
| Frequency | ----- | ----- | 75.0MHz | ----- | 250.0MHz |
| Duty Cycle | ----- | @ $V_{CC}$-1.29V | 45/55% | ----- | 55/45% |
| Logic 0 (2) | $V_{OL}$ | ----- | 1.35V | ----- | 1.70V |
| Logic 1(2) | $V_{OH}$ | ----- | 2.28V | ----- | 2.56V |
| Rise & Fall Time | tr,tf | 20-80%$V_O$ with 50 ohm load to $V_{CC}$-2V | ----- | ----- | 600 psec |
| $T_{pd}$ (4) | ----- | ----- | -200 psec | ----- | +200 psec |
| Jitter, RMS(3) | ----- | ----- | ----- | ----- | 3 psec |
| Enable Voltage(5) | ----- | with $V_{EE}$ = 0V | 2.0V | ----- | ----- |
| Disable Voltage | ----- | with $V_{EE}$ = 0V | ----- | ----- | 0.8V |
| Frequency Stability (1) | dF/F | Overall conditions including: voltage, calibration, temp., 10 yr aging, shock, vibration | -100ppm | ----- | +100ppm |

### General Characteristics

| Parameter | Symbol | Conditions | Min | Typical | Max |
|---|---|---|---|---|---|
| Supply Voltage | $V_{CC}$ | ----- | 3.15V | 3.3V | 3.45V |
| Supply Current | $I_{CC}$ | 50 ohm termination To 2.00V below $V_{CC}$ | 0.0 mA | ----- | 80 mA |
| Output current | $I_O$ | Low level Output Current | 0.0 mA | ----- | ±50.0 mA |
| Operating temperature | $T_A$ | ------ | 0°C | ----- | 70°C |
| Storage temperature | $T_S$ | ----- | -55°C | ----- | 125°C |
| Power Dissipation | $P_D$ | ----- | ----- | ----- | 276 mW |
| Lead temperature | $T_L$ | Soldering, 10 sec. | ----- | ----- | 300°C |
| Load | 50 Ohm to $V_{CC}$-2V or Thevenin Equivalent, Bias Required | | | | |
| Start-up time | $t_S$ | ----- | ----- | 2 ms | 10 ms |

### Environmental and Mechanical Characteristics

| | |
|---|---|
| Mechanical Shock | Per MIL-STD-202, Method 213, Condition E |
| Thermal Shock | Per MIL-STD-833, Method 1011, Condition A |
| Vibration | 0.060" double amplitude 10 Hz to 55 Hz, 35g's 55Hz to 2000 Hz |
| Soldering Condition | 300°C for 10 seconds |
| Hermetic Seal | Leak rate less than 1 x $10^{-8}$ atm.cc/sec of helium |

***Footnotes:***
1) Standard frequency stability (±20,±25,±50ppm & others available)
2) $V_{OL}$, $V_{OH}$, referenced to ground ($V_{EE}$) with $V_{CC}$ = 3.3V
3) Jitter performance is frequency dependent. Please contact factory for full Wavecrest characterization.
4) Tpd is phse shift between the falling edge of pin 4 at 2.0V and the rising edge of pin 5 at 2.01V.
5) Open to enable pin also enables the output.

**Creating a Part Number**

**SD - A292X - FREQ**


**Package Code**
SD 6 pad 5x7mm SMD

**Input Voltage**

| Code | Specification |
|---|---|
| A | 3.3V |
| | 5V |

**Tolerance/Performance**

| | |
|---|---|
| 0 | ±100ppm 0-70°C |
| 1 | ±50ppm 0-70°C |
| 7 | ±25ppm 0-70°C |
| 9 | Customer Specific |
| A | ±20ppm 0-70°C |
| B | ±50ppm -40 to +85°C |
| C | ±100ppm -40 to +85°C |

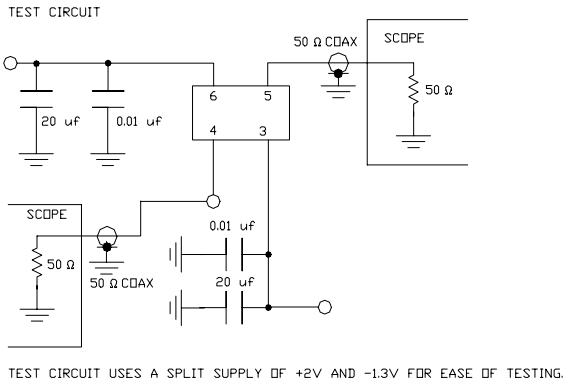


NEL FREQUENCY CONTROLS, INC.
357 Beloit Street, P.O. Box 457, Burlington, WI 53105-0457 U.S.A. Phone 262/763-3591 FAX 262/763-2881
Email: nelsales@nelfc.com www.nelfc.com