
CRYSTAL CLOCK OSCILLATORS

Data Sheet 0306A

Rev. P



Differential Positive ECL (DPECL)
SD-B2980 Series

Description


The **SD-B2980 Series** of quartz crystal oscillators provide DPECL compatible signals. Systems designers may now specify space-saving, cost-effective packaged PECL oscillators to meet their timing requirements.

Features

- Wide frequency range–60.0MHz to 312.5MHz
- User specified tolerance available
- Space-saving alternative to discrete component oscillators
- High shock resistance, to 1000g
- 2.5 volt operation
- Overtone technology
- High Reliability - NEL HALT/HASS qualified for crystal oscillator start-up conditions
- Wavecrest jitter characterization available
- High Q Crystal actively tuned oscillator circuit
- No internal PLL avoids cascading PLL problems
- Power supply decoupling internal
- Metal lid electrically connected to ground to reduce EMI
- Gold plated pads
- RoHS Compliant, Lead Free Construction

Electrical Connection

Pin	Connection
1	Enable/Disable
2	N.C.
3	V_{EE} /Ground
4	Output
5	/Output
6	V_{CC}

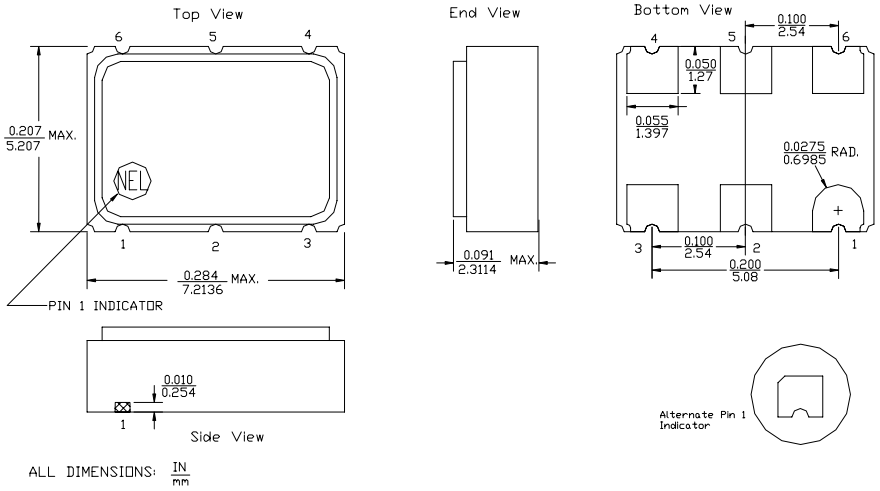

NEL FREQUENCY CONTROLS, INC.

357 Beloit Street, P.O. Box 457, Burlington, WI 53105-0457 U.S.A. Phone 262/763-3591 FAX 262/763-2881
Email: nelsales@nelfc.com www.nelfc.com

Rev. P

SD-B2980 Series Continued
Differential Positive ECL (DPECL)

Operating Conditions and Output Characteristics

Electrical Characteristics

Parameter	Symbol	Conditions	Min	Typical	Max
Frequency	-----	-----	60.0MHz	-----	312.5MHz
Duty Cycle	-----	@ V_{CC}-1.29V	45/55%	-----	55/45%
Logic 0 (2)	V_{OL}	-----	-----	-----	V_{CC}-1.62V
Logic 1(2)	V_{OH}	-----	V_{CC}-1.025V	-----	-----
Rise & Fall Time	tr,tf	20-80%V_O with 50 ohm load to V_{CC}-2V	-----	-----	700 psec
T_{PD} (6)	-----	-----	-200 psec	-----	+200 psec
Jitter, RMS(3)	-----	-----	-----	-----	1 psec
Enable Voltage(4)	-----	with V_{EE} = 0V	1.6V	-----	-----
Disable Voltage	-----	with V_{EE} = 0V	-----	-----	0.4V
Frequency Stability (1)	dF/F	Overall conditions including: voltage, calibration, temp., 10 yr aging, shock, vibration	-100ppm	-----	+100ppm

General Characteristics

Parameter	Symbol	Conditions	Min	Typical	Max
Supply Voltage(5)	V_{CC}	-----	2.375V	2.5V	2.625V
Supply Current	I_{CC}	50 ohm termination To 2.00V below V_{CC}	0.0 mA	-----	80 mA
Output current	I_O	Low level Output Current	0.0 mA	-----	±50.0 mA
Operating temperature	T_A	------	0°C	-----	70°C
Storage temperature	T_S	-----	-55°C	-----	125°C
Power Dissipation	P_D	-----	-----	-----	210 mW
Solder temperature	T_L	4 minutes	-----	-----	253°C
Load	50 Ohm to V_{CC}-2V or Thevenin Equivalent, Bias Required				
Start-up time	t_S	-----	-----	2 ms	10 ms

Environmental and Mechanical Characteristics

Mechanical Shock	Per MIL-STD-202, Method 213, Condition E
Thermal Shock	Per MIL-STD-883, Method 1011, Condition A
Vibration	0.060" double amplitude 10 Hz to 55 Hz, 35g's 55Hz to 2000 Hz
Hermetic Seal	Leak rate less than 1 x 10^{-8} atm.cc/sec of helium

Footnotes:

1) Standard frequency stability (±20,±25,±50ppm & others available)
2) V_{OL}, V_{OH}, referenced to ground (V_{EE}) with V_{CC} = 2.5V
3) Jitter performance is frequency dependent. Please contact factory for full Wavecrest characterization. RMS jitter bandwidth of 12kHz to 20MHz.
4) Open to enable pin also enables the output.
5) Internal high frequency power source decoupling.
6) Tpd is phase shift between the falling edge of pin 4 at 2.0V and the rising edge of pin 5 at 2.01V.

Creating a Part Number

SD - B298X - FREQ


Package Code
SD 6 pad 5x7mm SMD

Input Voltage

Code	Specification
A	3.3V
B	2.5V
	5V

Tolerance/Performance

0	±100ppm 0-70°C
1	±50ppm 0-70°C
7	±25ppm 0-70°C
9	Customer Specific
A	±20ppm 0-70°C
B	±50ppm -40 to +85°C
C	±100ppm -40 to +85°C

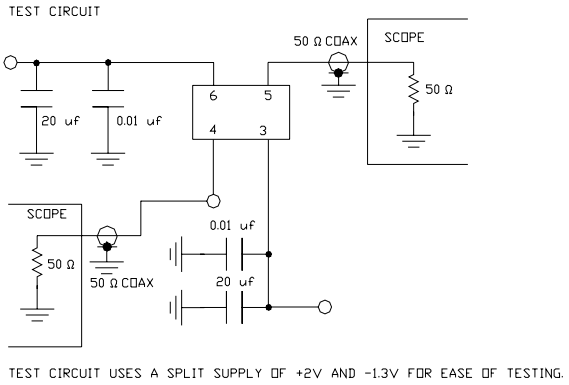

NEL FREQUENCY CONTROLS, INC.
357 Beloit Street, P.O. Box 457, Burlington, WI 53105-0457 U.S.A. Phone 262/763-3591 FAX 262/763-2881
Email: nelsales@nelfc.com www.nelfc.com