

DASH NO.	M CODE	MADE FROM

GSD

1709-1

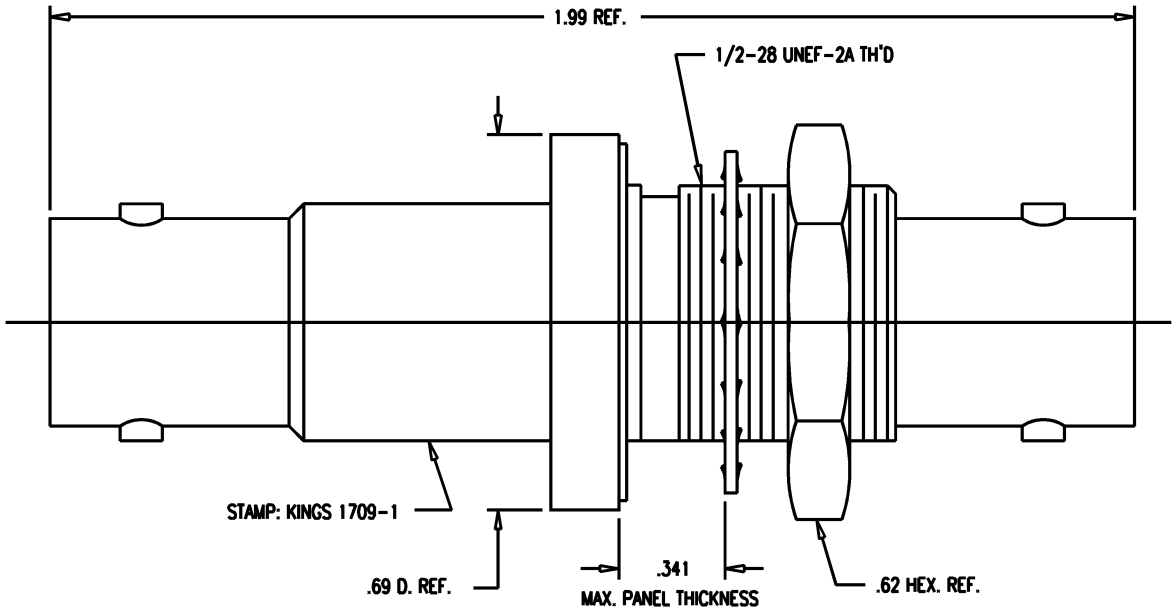



MOUNTING HOLE

NOTES:
1. INTERFACE PER MIL-STD-348, FIG. 314-1.
2. MATERIALS:
   GASKET: SILICONE RUBBER, ZZ-R-765
   INSULATOR: TEFLON, ASTM-D-4894
   LOCKWASHER: PHOSPHOR BRONZE, ASTM-B-103
   ALL OTHER METAL PARTS: BRASS, ASTM-B16
3. FINISHES:
   CENTER CONTACT: GOLD PLATE PER MIL-G-45204
   ALL OTHER METAL PARTS: KINGS TARNISH RESISTANT NICKEL FINISH (TR-5)
4. ELECTRIAL CHARACTERISTICS:
   NOMINAL IMPEDANCE: NON-CONSTANT
   VOLTAGE RATING: 3500 VRMS
   5000 VDC

GSD

REVISIONS

ISSUE	CHANGES
3	CN 36706 C REDRAWN KH 11/30/95

KAM6256

SCALE 4:1	
APPROX SURFACE AREA	
USED ON	
REF:	

ADPT M-M, BKHD, SHV

DRAWN	KH	11/30/92
DESIGN	AR	12/01/92
APPR.		DATE

KINGS
ELECTRONICS CO., INC.
TUCKAHOE, NEW YORK 10707

1709-1