


DASH NO.	M CODE	MADE FROM

GSD

1994-1-9

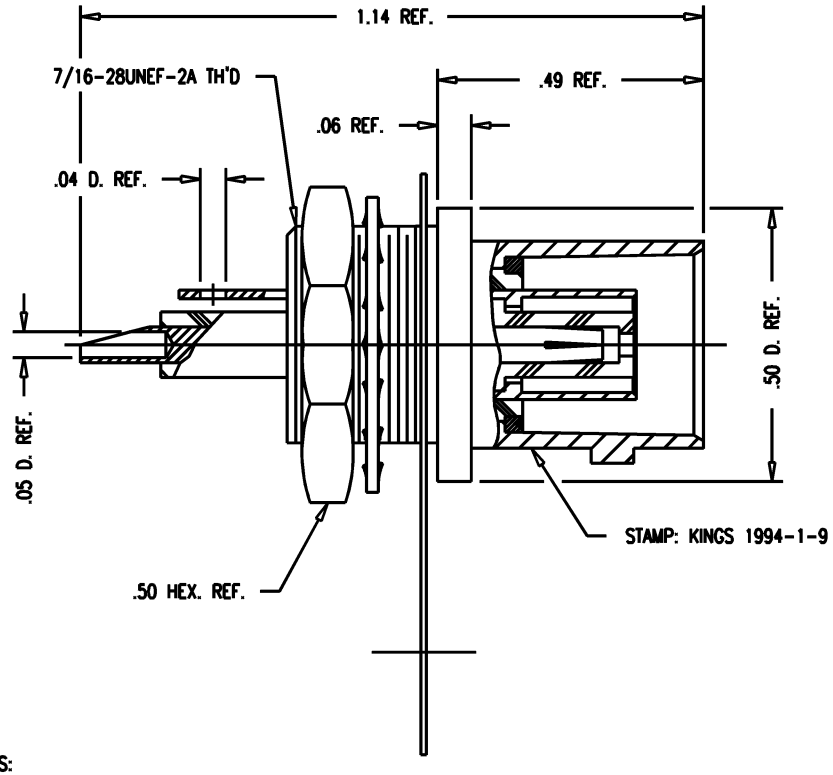

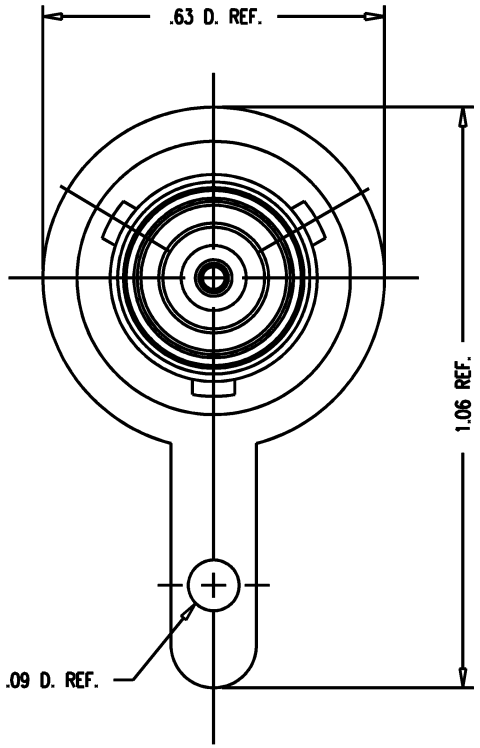



MOUNTING HOLE

NOTES:
1. FOR USE WITH .122 MAX. PANEL THICKNESS.
2. INTERFACE PER MIL-STD-348, FIG. 201-2.
3. MATERIALS:
   INSULATORS: TEFLON, ASTM -D-1457
   CENTER CONTACT: BER. COPPER, ASTM-B-196
   ALL OTHER METAL PARTS: BRASS, QQ-B-626
4. FINISHES:
   ALL CONTACTS: HARD GOLD PLATE, PER MIL-G-45204
   GROUNDING LUG: HOT TIN DIP, PER MIL-T-10727
   ALL OTHER METAL PARTS: KINGS TARNISH RESISTANT FINISH (TR-5)
5. ELECTRICAL CHARACTERISTICS:
   NOMINAL IMPEDANCE: NON-CONSTANT
   WORKING VOLTAGE: 400 VRMS
   FREQUENCY RANGE: DC TO 5 MHz.
6. SAME AS TROMPETER BJ77 IN FORM, FIT & FUNCTION.

GSD

REVISIONS

ISSUE	CHANGES
5	CN 33012 A REDRAWN WJM 04/03/91
6	CN 35074 D MJB 11/09/93

WJM0927

SCALE	4:1
APPROX SURFACE AREA	
WAS: E-4723	
USED ON	
REF:	

RECEPTACLE, BULKHEAD, TRB

DRAWN WJM	DATE 04/04/91
DESIGN VLS	DATE 05/03/91
APPR.	DATE

KINGS
ELECTRONICS CO., INC.
TUCKAHOE, NEW YORK 10707

1994-1-9