PANJIT SEMI CONDUCTOR

DATA SHEET


SD320YS~SD3100YS

SURFACE MOUNT SCHOTTKY BARRIER RECTIFIERS

VOLTAGE 20 to 100 Volts CURRENT - 3 Ampere

TO-252 / DPAK

Unit: inch (mm)

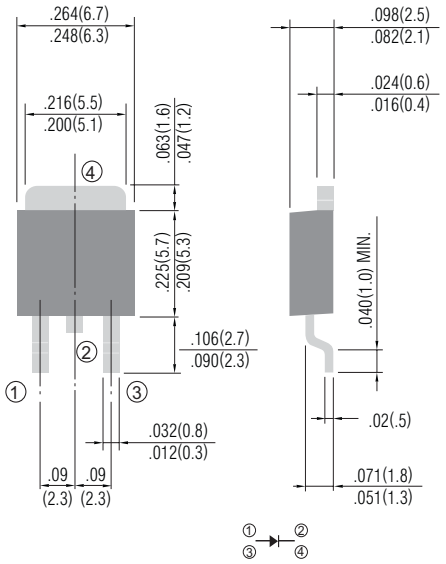

FEATURES

- Plastic package has Underwriters Laboratory Flammability Classification 94V-O
- For surface mounted applications
- Low profile package
- Built-in strain relief
- Low power loss, High efficiency
- High surge capacity
- For use in low voltage high frequency inverters, free wheeling, and polarity protection applications
- High temperature soldering guaranteed:260¢XC/10 seconds at terminals

MECHANICAL DATA

Case: D PAK/TO-252 molded plastic

Terminals: Solder plated, solderable per MIL-STD-750,Method 2026

Polarity: As marking

Standard packaging: 16mm tape (EIA-481)

Weight: 0.015 ounces, 0.4grams.

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load.

For capacitive load, derate current by 20%

	SD320YS	SD330YS	SD340YS	SD350YS	SD360YS	SD380YS	SD3100YS	UNITS
Maximum Recurrent Peak Reverse Voltage	20	30	40	50	60	80	100	V
Maximum RMS Voltage	14	21	28	35	42	56	70	V
Maximum DC Blocking Voltage	20	30	40	50	60	80	100	V
Maximum Average Forward Rectified Current at Tc=75°C	3							A
Peak Forward Surge Current, 8.3 ms single half sine-wave superimposed on rated load (JEDEC method)	75							A
Maximum Instantaneous Forward Voltage at 3.0A (Note 1)	0.50			0.64		0.85		V
Maximum DC Reverse Current at Tc=25°C DC Blocking Voltage per element Tc=100°C	0.2 20							mA
Maximum Thermal Resistance (Note 2)	80							°C/W
Operating and Storage Temperature Range	-55 to +125							°C
Storage Temperature Range	-65 to +150							°C

NOTES:

1. Thermal Resistance Junction to Ambient .

RATING AND CHARACTERISTIC CURVES

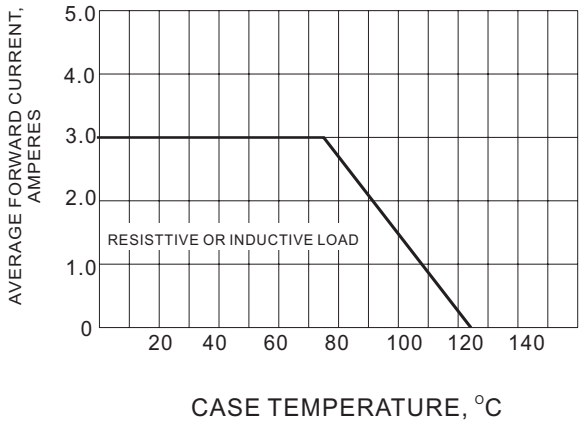


Fig.1- FORWARD CURRENT DERATING CURVE

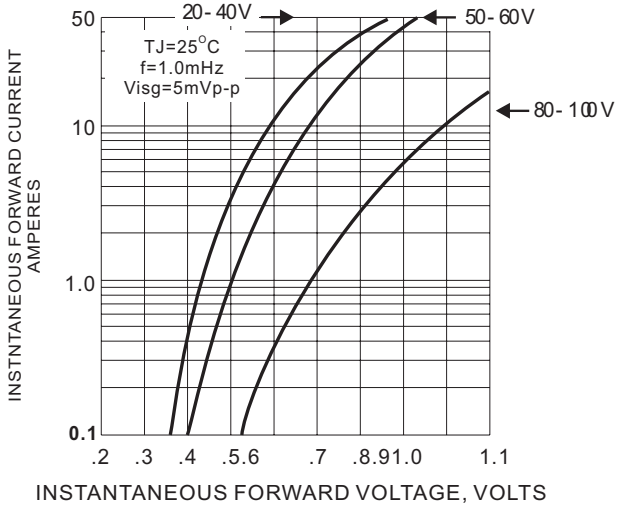


Fig.2- TYPICAL INSTANTANEOUS FORWARD CHARACTERISTIC

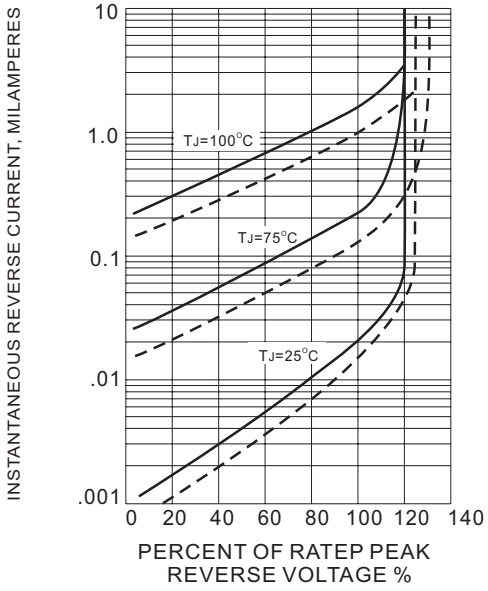


Fig.3- TYPICAL REVERSE CHARACTERISTICS

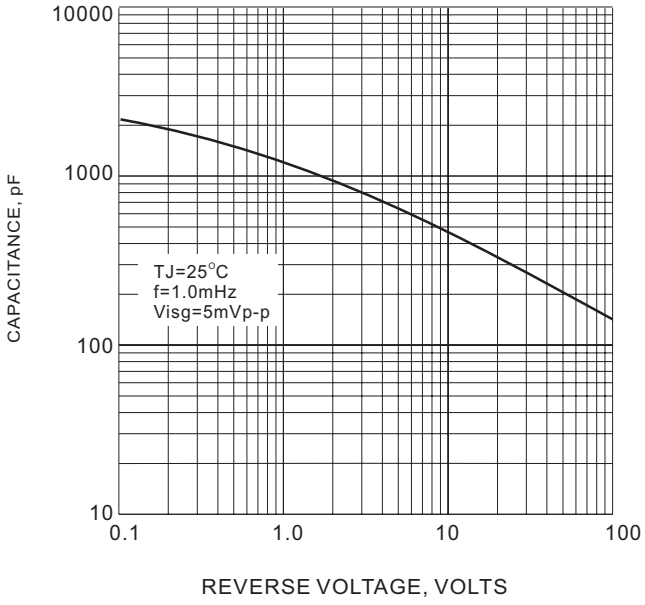


Fig.4- TYPICAL JUNCTION CAPACITANCE

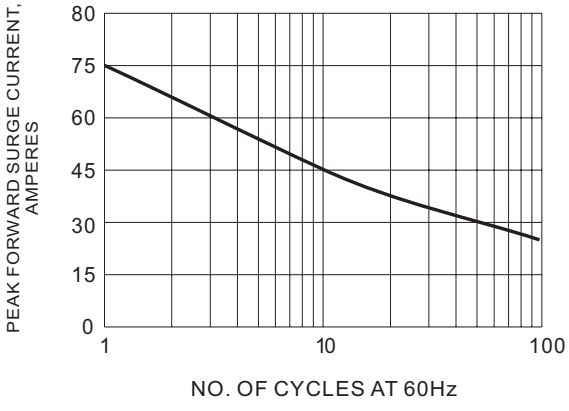


Fig.5- MAXIMUM NON-REPETITIVE SURGE CURRENT