
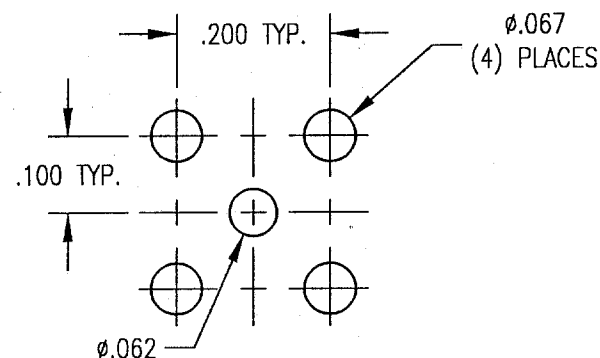
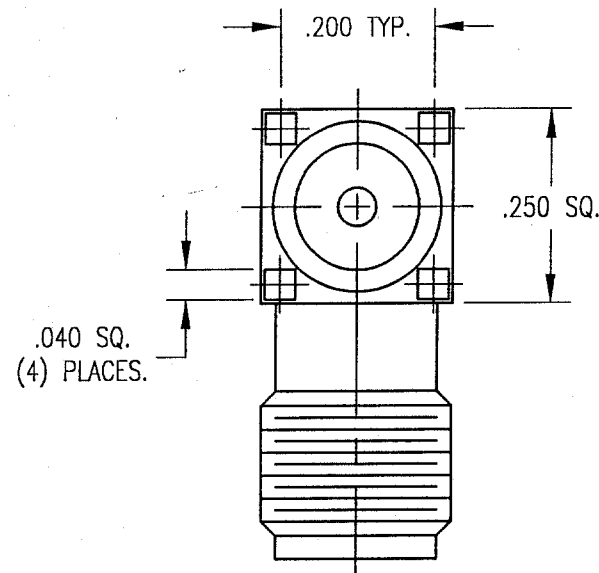


DWC. NO.		353-060-0040H	
REV	DESCRIPTION	BY	APPRO
A	NPR 1669	JED	2/7/00

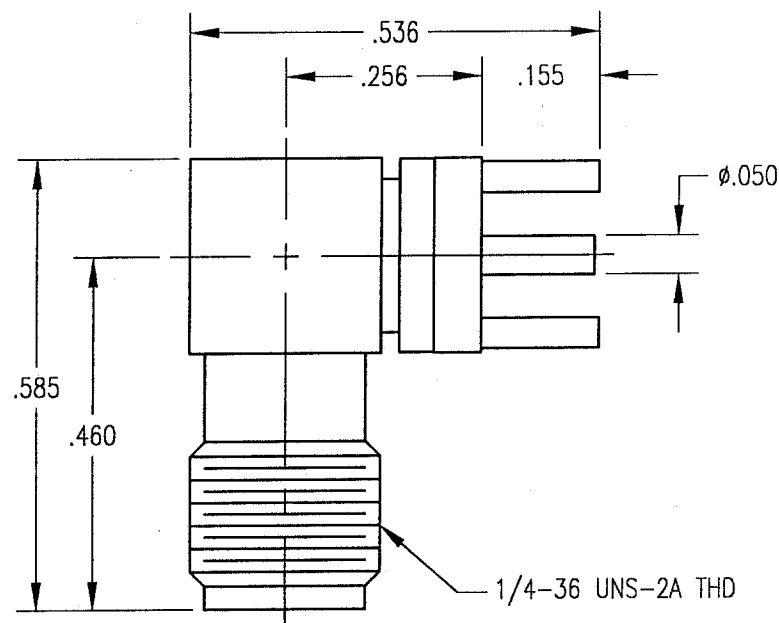

MOUNTING HOLE LAYOUT

NOTES:

1. MATERIALS:

BODY: BRASS PER ASTM B16
 CENTER CONTACT: BERYLLIUM COPPER PER ASTM B196
 INSERT: STAINLESS STEEL PER ASTM A582
 INSULATOR: TEFLON PER ASTM D1710

2. FINISH:

BODY: .000015 MIN. GOLD PER MIL-G-45204 OVER
 .000050 MIN. NICKEL PER QQ-N-290
 CENTER CONTACT: .000030 MIN. GOLD PER MIL-G-45204 OVER
 .000050 MIN. NICKEL PER QQ-N-290
 INSERT: .000005 MIN. GOLD PER MIL-G-45204 OVER
 .000050 MIN. NICKEL PER QQ-N-290

3. ELECTRICAL:

IMPEDANCE: 50 OHMS

PER ASME Y14.5M-1994 UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES (MM) TOLERANCES: DECIMALS .XX ± .01/0.254 .XXX ± .005/0.127 ANGLES ± 2° SCALE: 4:1		Litton Winchester/Retconn 400 Park Road Wallingford, Connecticut 06495	
CUSTOMER DRAWING		TITLE SMA RIGHT ANGLE PCB MOUNT RECEPTACLE	
DRAWN JED	DATE 2/7/00	CHECKED JH 2-8-00	DATE 2/7/00
APPROVED JED	DATE 2/7/00	APPROVED KST	DATE 2/7/00
A 353-060-0040H		SHT. 1 OF 1	REV. A