
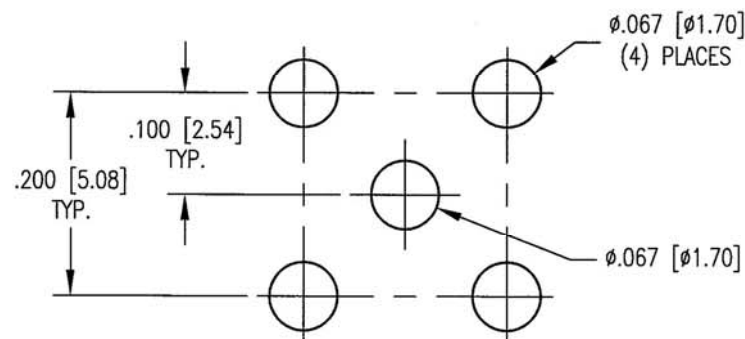
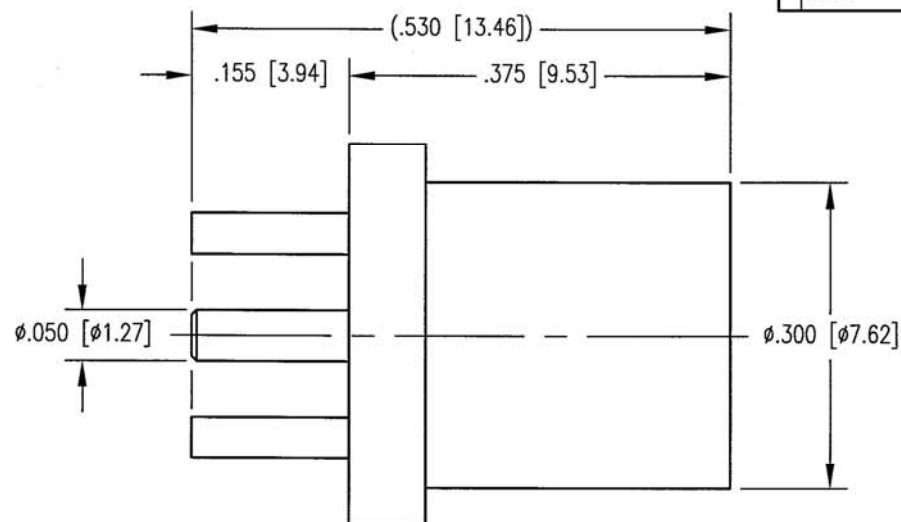


DWG. NO. 361-060-0040H		
REV	DESCRIPTION	BY DATE APPD
A	RELEASED PER ECR 7417	7/22/02

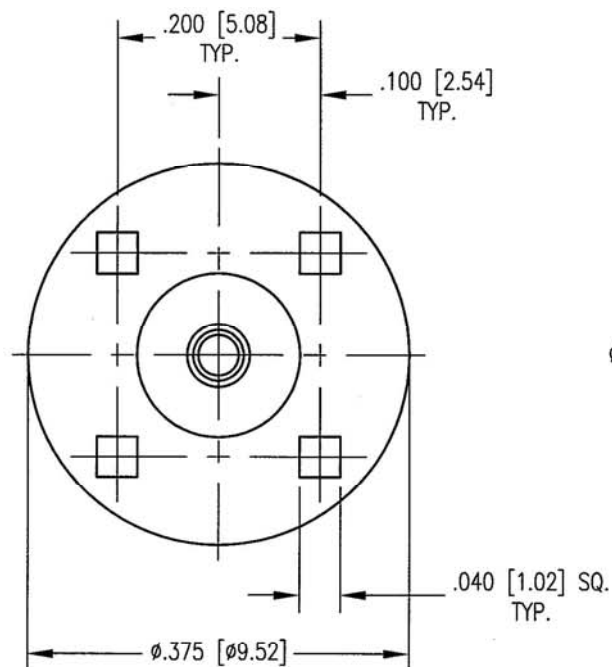

RECOMMENDED MOUNTING HOLE

NOTES:

1. MATERIALS:

CONTACTS: COPPER ALLOY
INSULATOR: TEFLON PER ASTM D1710
ALL OTHER METAL PARTS: BRASS PER ASTM B16

2. FINISH:

CONTACTS AND SHROUD: .000030 MIN. GOLD PER MIL-G-45204 OVER
.000050 MIN. NICKEL PER QQ-N-290
BODY: .000015 MIN. GOLD PER MIL-G-45204 OVER
.000050 MIN. NICKEL PER QQ-N-290

PER ASME Y14.5M-1994 UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES (MM)			
TOLERANCES: DECIMALS .XX ± .01 [0.254] .XXX ± .005 [0.127] ANGLES ± 2° SCALE: 5:1		TITLE BMA STRAIGHT PCB MOUNT RECEPTACLE	
CUSTOMER DRAWING		SHT. 1 OF 1 REV. A	
DRAWN JED	DATE 7/22/02	CHECKED JED	DATE 7/26/02
APPROVED JED	DATE 7/24/02	DATE 7/24/02	DATE 7/24/02