



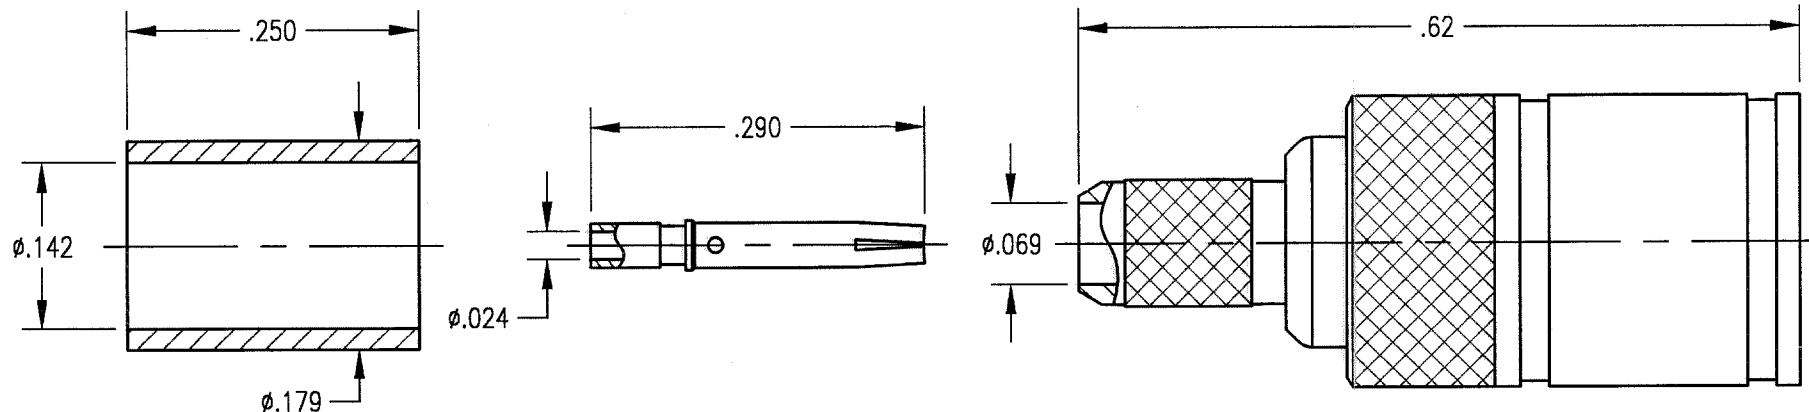

NOTES:

1. MATERIALS:
BODY AND SHROUD: BRASS PER ASTM B16
CONTACT: BERYLLIUM COPPER PER ASTM B196
INSULATOR: TEFLON PER ASTM D1710
RETAINING RING: BERYLLIUM COPPER PER ASTM B194
2. FINISH:
BODY: .000015 MIN. GOLD PER MIL-G-45204 OVER
.000050 MIN. NICKEL PER QQ-N-290
CONTACT: .000030 MIN. GOLD PER MIL-G-45204 OVER
.000050 MIN. NICKEL PER QQ-N-290
ALL OTHER METAL PARTS: .000005 MIN. GOLD PER MIL-G-45204
OVER .000050 MIN. NICKEL PER QQ-N-290
3. FOR USE WITH RG-316 DOUBLE SHIELDED OR EQUIVALENT CABLE.

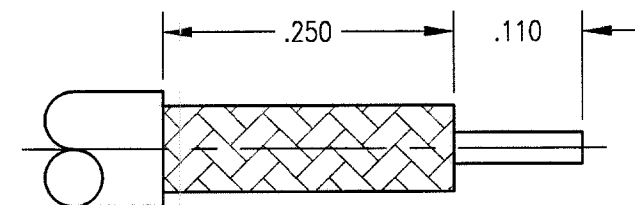

TRIMMING DIMENSIONS

THIS INFORMATION IS PROPRIETARY AND CONFIDENTIAL. IT IS DISCLOSED TO YOU ON
CONDITION NO FURTHER DISCLOSURE IS MADE TO OTHER THAN RETCONN PERSONNEL
WITHOUT WRITTEN AUTHORIZATION FROM RETCONN INC., TORRINGTON, CT.

REV.	DESCRIPTION OF CHANGE	DATE	DRN	APPR
A	ECN 2197	2/19/99	JMC	
-	RELEASED PER NPR 683	1/15/98	KJT	PRP

REVISIONS

UNLESS OTHERWISE SPECIFIED
TOLERANCES: 3 PLACE DECIMALS $\pm .005$ 2 PLACE DECIMALS $\pm .010$
FRACTIONS $\pm 1/64$ ANGLE $\pm 2^\circ$
ALL DIMENSIONS PRIOR TO PLATING
CHAMFER 1ST THREAD 45° TO ROOT DIAMETER
REMOVE ALL BURRS AND SHARP EDGES
ALL DIAMETERS TO BE CONCENTRIC WITHIN $.003$ TIR
SURFACE FINISH SHALL BE 63 MICROINCHES MAXIMUM
DIMENSIONS IN INCHES DO NOT SCALE PRINT

MATERIAL
FINISH

SALES DRAWING				
RETCONN				
A SUBSIDIARY OF SPM 199 W. PEARL ROAD TORRINGTON, CT. 06790 TEL. (860) 489-1220 FAX (860) 496-7307				
TITLE				
STRAIGHT CRIMP/CRIMP SMB PLUG				
DRAWN KJT	DATE 1/15/98	CHECKED JMC	SCALE 6:1	FSCM OI
APPR. PRP	DWG. NO. 510-900-0631H	REV		