

GSD

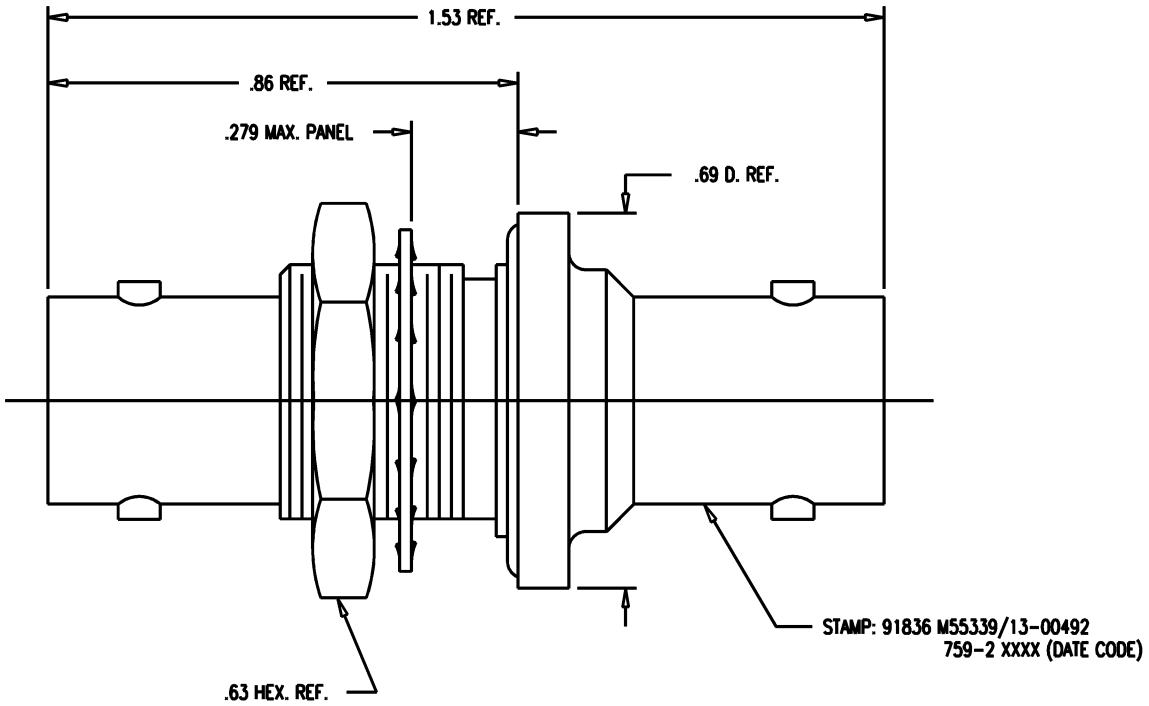


NOTES:
1. INTERFACE PER MIL-STD-348, FIG. 301-2.
2. MATERIALS:
   - INSULATORS: TEFLON, ASTM-D-4894
   - GASKET: SILICONE RUBBER, ZZ-R-765
   - K-GRIP SLEEVE: COMMERCIAL BRONZE, ASTM-B-140
   - LOCKWASHER: PHOSPHOR BRONZE, ASTM-B-103
   - CENTER CONTACT:BER. COP., ASTM-B-196
   - ALL OTHER METAL PARTS: BRASS, ASTM-B16
3. FINISHES:
   - CENTER CONTACT: GOLD PLATE PER MIL-G-45204
   - ALL OTHER METAL PARTS: SILVER PLATE PER QQ-S-365
4. ELECTRICAL CHARACTERISTICS:
   - NOMINAL IMPEDANCE: 50 OHMS
   - FREQUENCY RANGE: DC TO 4 GHZ
   - WORKING VOLTAGE: 500 VRMS
5. ENVIRONMENTAL
   - UNIT WILL SHOW NO LEAKAGE AT 50 P.S.I.
   - LEAKAGE RATE SHALL NOT EXCEED 1 X $10^{-7}$ cc/sec OF TRACER GAS AT ATMOSPHERIC PRESSURE




MOUNTING HOLE

GSD

M55339/13-00492

| REVISIONS | |
|---|---|
| ISSUE | CHANGES |
| 7 | CN 35618 D<br>KH 01/09/95 |

KAM6258

| | |
|---|---|
| SCALE | 4:1 |
| APPROX SURFACE AREA | |
| 759-2 | |
| USED ON | |
| REF: | |

ADAPTER, F-F, BULKHEAD, HERMETIC SEAL, BNC

| | | |
|---|---|---|
| DRAWN | KH | DATE 12/01/95 |
| DESIGN | MJB | DATE 12/02/95 |
| APPR. | | DATE |

KINGS
ELECTRONICS CO., INC.
TUCKAHOE, NEW YORK 10707

M55339/13-00492