


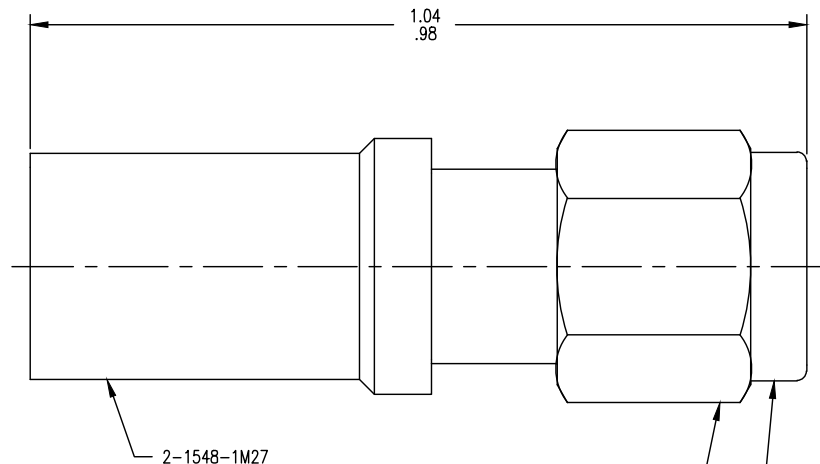

NOTES:

1. FOR USE WITH BOEING BMS13-65-0G AND ADAMS RUSSELL FC20Z CABLES.
2. FOR CABLING INSTRUCTIONS SEE 3-546-1.
3. FOR CRIMPING USE DIE KTH-2242.
4. INTERFACE PER MIL-STD-348, FIG. 310-1.
5. CENTER CONTACT (1-3959-2MA9) SUPPLIED UNASSEMBLED.
6. MARK PACKAGE: HS5940-1
875-100-3 (DATE CODE)
91836

7. MATERIALS:

INSULATOR: TEFLON, ASTM D1710
GASKET: SILICONE RUBBER, A-A-59588
K-GRIP SLEEVE-COM'L BRONZE, ASTM B135
C-RING: BER. COPPER, ASTM B196
ALL OTHER PARTS: STAINLESS STEEL, 303
CONTACT: BRASS, ASTM-B16

8. FINISHES:

CENTER CONTACT: .000050 MIN GOLD PLATE, PER ASTM B488 OVER
.000050 MIN. NICKEL PER AMS-QQ-N-290 (RoHS)
K-GRIP: .000050 MIN NICKEL PER AMS-QQ-N-290
OVER .000050 MIN COPPER PER ASTM B734 (RoHS)
ALL OTHER METAL PARTS: PASSIVATED PER SAE-AMS-QQ-P-35

9. ELECTRICAL CHARACTERISTICS:

NOMINAL IMPEDANCE: 50 OHMS
FREQUENCY RANGE: DC TO 12.4 GHz
WORKING VOLTAGE: 500 VOLTS RMS
VSWR: $1.20 + 0.025 \times F$ (F IN GHz)
INSERTION LOSS (dB): $0.06 \times \sqrt{F}$ (F IN GHz)

10. CONNECTOR WEIGHT: 4.8 GRAMS

.32
.30

MARK: 91836 875-100-3 (DATE CODE)

875-100-3

REVISIONS

ISSUE	CHANGES
3	CN 39554 A DCT 8/3/6
4	CN 39605 C JPK 09/05/06
F	REVISED PER ER23220 GGR 04/13/2010
G	ER35046 KPL 09/22/11
H	REVISED PER DMF304 & ER35768 KPL 11/10/11

CUSTOMER SALES DRAWING

THIS DRAWING, THE DESIGNS AND IDEAS EMBODIED IN THE DEVICE TO WHICH IT RELATES, AND THE METHOD OF PRODUCING THE DEVICE, ARE THE PROPERTY OF WINCHESTER ELECTRONICS CORPORATION AND SHALL NOT BE EMPLOYED, COPIED, OR DISCLOSED TO ANYONE, IN ANY MANNER WITHOUT THE CONSENT OF WINCHESTER ELECTRONICS CORPORATION.

SCALE 6:1

APPROX SURFACE AREA

WAS: E-18857

CAGE CODE: 91836

REF: Mc D. DOUGLAS #HS5940-1 REV. A

PLUG, SMA

DRAWN ME	DATE 06/06/95
DESIGN AR	DATE 06/06/95
APPR.	DATE

WINCHESTER
ELECTRONICS
Winchester Electronics Corporation
62 Barnes Industrial Road North
Wallingford, Connecticut 06492

875-100-3