


GSD

M39012/17-0014

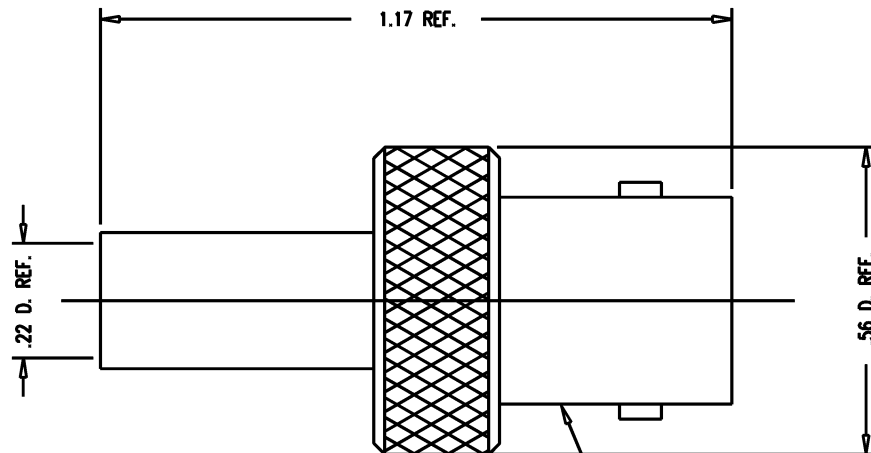

STAMP: 91836 M39012/17-0014  
KC-39-93 XX XX (DATE CODE)

## NOTES:

1. FOR USE WITH RG-142, 223 AND 400/U CABLE.
2. FOR CABLING INSTRUCTIONS SEE CP-465.
3. FOR CABLE TRIMMING USE KTJ-113 AND KTD-166.
4. FOR CRIMPING USE DIE KTH-2001.
5. INTERFACE PER MIL-STD-348, FIG. 301-2.
6. CENTER CONTACT TO BE SUPPLIED UNASSEMBLED.
7. MATERIALS:  
INSULATOR-TEFLON, ASTM-D-1457  
K-GRIP SLEEVE-COMMERCIAL BRONZE, ALLOY 220  
CENTER CONTACT-BER. COP., ASTM-B-196  
ALL OTHER METAL PARTS-BRASS, ASTM-B16
8. FINISHES:  
CENTER CONTACT-GOLD PLATE PER MIL-G-45204  
ALL OTHER METAL PARTS-SILVER PLATE PER QQ-S-365
9. ELECTRICAL CHARACTERISTICS:  
NOMINAL IMPEDANCE-50 OHMS  
FREQUENCY RANGE-DC TO 4 GHZ  
WORKING VOLTAGE-500 VRMS

## REVISIONS

| ISSUE | CHANGES                               |
|-------|---------------------------------------|
| 5     | CN 32278 A<br>LNM 06/13/90            |
| 6     | CN 33690 C<br>REDRAWN<br>JCA 02/18/92 |
| 7     | CN 33780 E<br>JCA 03/01/93            |

KAM1161

SCALE 4:1

APPROX SURFACE AREA

KC-39-93

USED ON

REF:

JACK, BNC

|        |     |      |          |
|--------|-----|------|----------|
| DRAWN  | KH  | DATE | 05/31/91 |
| DESIGN | MJB | DATE | 05/31/91 |
| APPR.  |     | DATE |          |

**KINGS**  
ELECTRONICS CO., INC.  
TUCKAHOE, NEW YORK 10707

M39012/17-0014

GSD