
S-D

M39012/15-0002

S-D

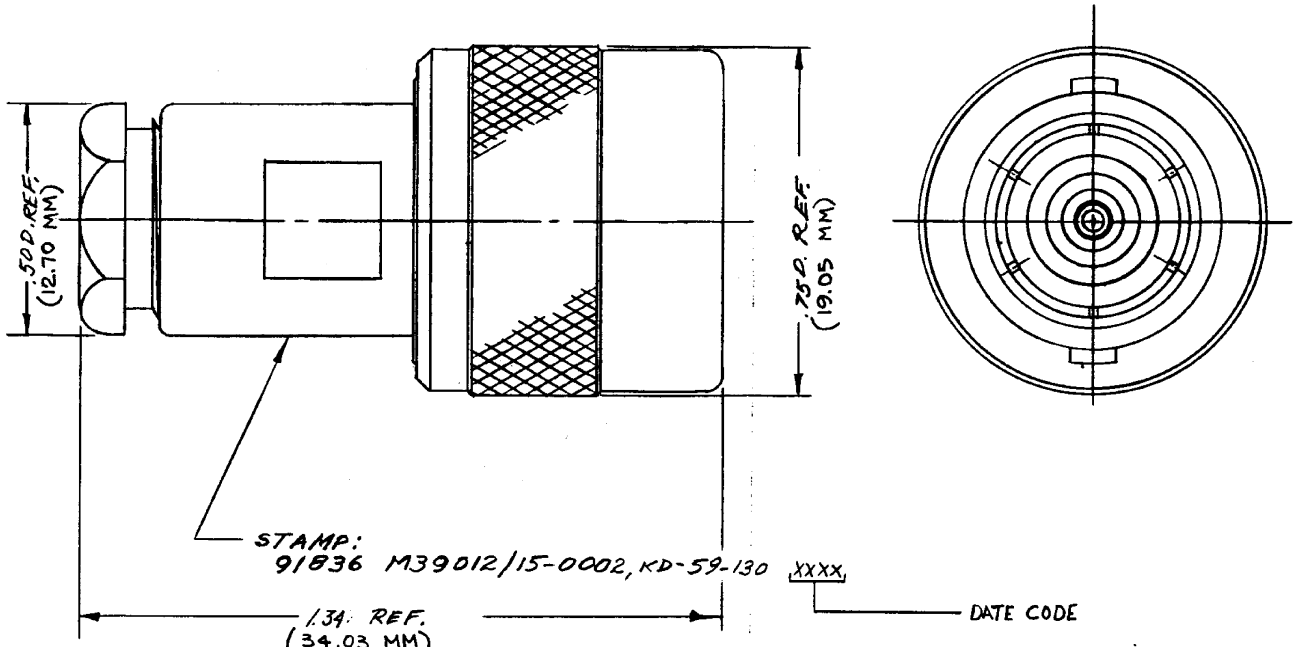

NOTES:
FOR USE WITH RG 55,58 & 223/U CABLE GROUPS.

REVISIONS	
ISSUE	CHANGES
3	CN 23168 E GJG 25 MAR 82
4	CN 32256 A LNM 5 JUN 90
5	CN 38757 E BDH 22 JAN 03

KD-59-130

REF SUPERSEDES
UG 709 B/U

FINISH

SPEC.

MATL.

SPEC.

C PLUG

DRAWN CRS	DATE 13 APR 70
APPR.	DATE

KINGS ELECTRONICS
40 MARBLEDALE ROAD
TUCKAHOE, N. Y. 10707

M39012/15-0002

UNLESS OTHERWISE SPECIFIED:

1. TOLERANCES: FRACTIONS & 2 PLACE DECIMALS ± .010
   3 PLACE DECIMALS ± .004 ANGLES ± 0° 30'
   T. I. R. CONCENTRICITY OF ANY 2 DIAMETERS MAY NOT EXCEED THE SUM OF THEIR TOLERANCES.
2. REMOVE ALL BURRS, BREAK SHARP EDGES .005 MAX.
3. NO FILLETS PERMITTED.
4. SURFACE ROUGHNESS 63 MICROINCHES RMS MAX.
5. ALL DIMENSIONS PRIOR TO PLATING.

ITEM	REQ'D	DESCRIPTION	DRAWING NO.

S-D

DIETZGEN 198M N. B. 10040