


DASH NO.	M CODE	MADE FROM
----------	--------	-----------

GSD

KN-59-148

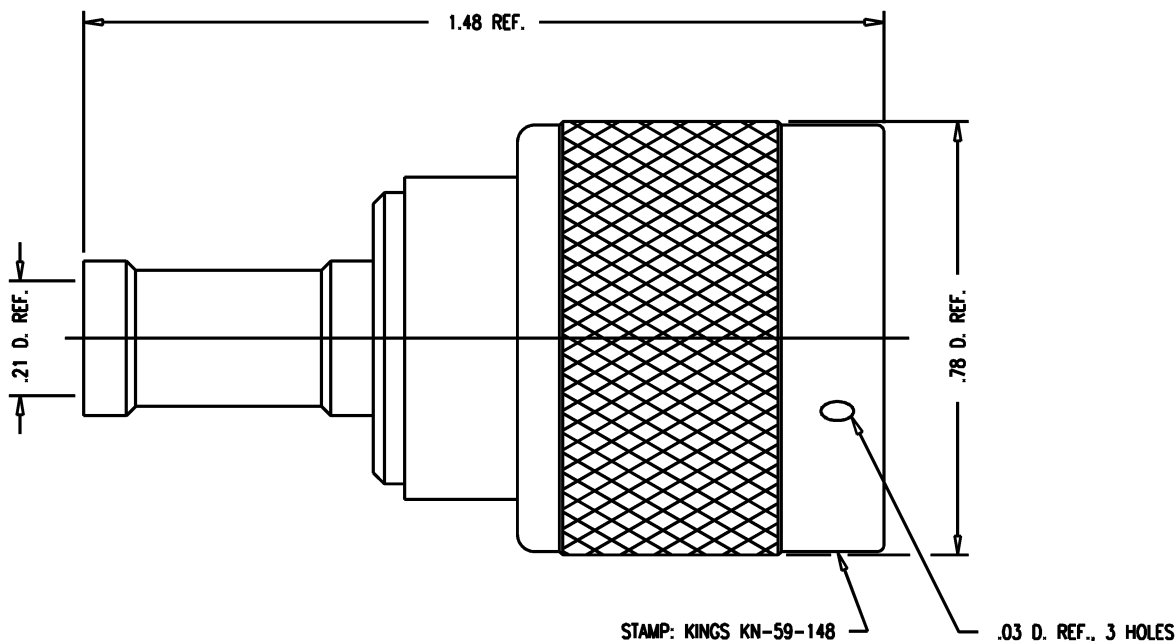

NOTES:

1. FOR USE WITH RG-58, 58A, 58C, 141 & 141A/U CABLE.
2. FOR CABLING INSTRUCTIONS SEE CP-415.
3. FOR CABLE TRIMMING USE KTJ-65 & KTD-38.
4. FOR CRIMPING USE DIE KTH-2061.
5. FOR POSITIONING OF CENTER CONTACT USE KTP-3.
6. INTERFACE PER MIL-STD-348, FIG. 304-1.
7. MATERIALS:
 - INSULATOR: TEFLON, ASTM-D-1457
 - GASKET: SILICONE RUBBER, ZZ-R-765
 - K-GRIP SLEEVE: COM. BRONZE TUBE, ALLOY 220
 - C-RING } PHOSPHOR BRONZE, QQ-B-750
 - OUTER CONTACT }
 - ALL OTHER METAL PARTS: BRASS, ASTM-B16
8. FINISHES:
 - CENTER CONTACT } SILVER PLATE, PER QQ-S-365
 - OUTER CONTACT }
 - ALL OTHER METAL PARTS: KINGS TARNISH RESISTANT FINISH (TR-5)
9. ELECTRICAL CHARACTERISTICS:
 - NOMINAL IMPEDANCE: 50 OHMS
 - WORKING VOLTAGE: 1000 VRMS
 - FREQUENCY RANGE: DC TO 11 GHz.

REVISIONS

ISSUE	CHANGES
6	CN 33385 E REDRAWN WJM 09/23/91

WJM1381

SCALE 4:1

APPROX SURFACE AREA

USED ON

REF:

PLUG, N

DRAWN WJM	DATE 09/23/91
DESIGN MJB	DATE 09/25/91
APPR.	DATE

KINGS
ELECTRONICS CO., INC.
TUCKAHOE, NEW YORK 10707

KN-59-148

GSD