


GSD

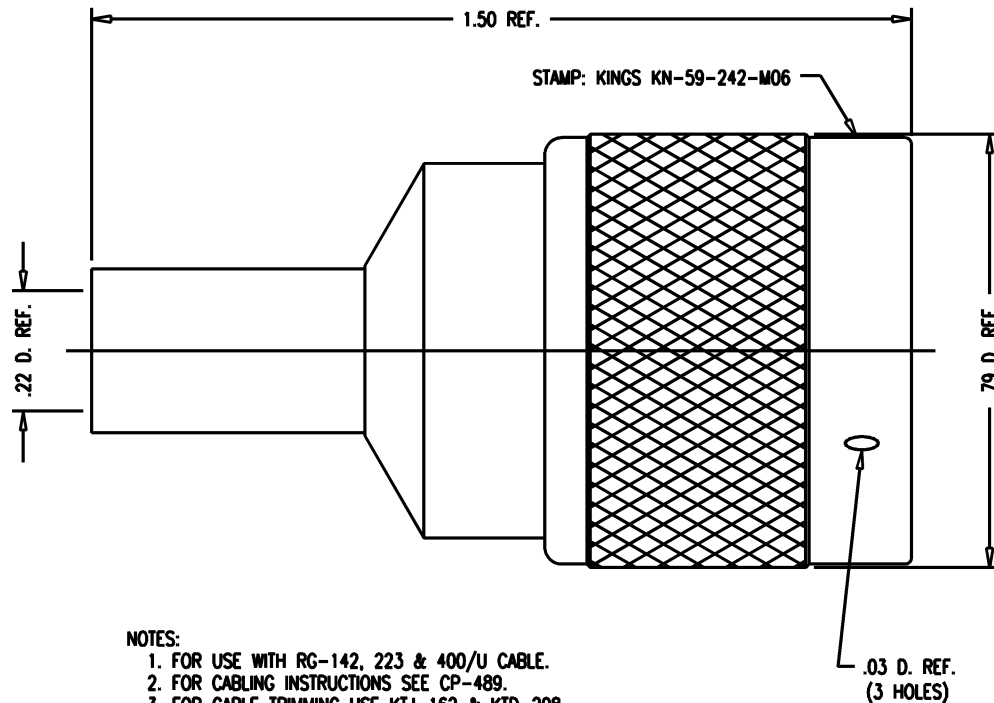

NOTES:

1. FOR USE WITH RG-142, 223 & 400/U CABLE.
2. FOR CABLING INSTRUCTIONS SEE CP-489.
3. FOR CABLE TRIMMING USE KTJ-162 & KTD-208.
4. FOR CRIMPING USE DIE KTH-2042.
5. INTERFACE PER MIL-STD-348, FIG. 304-1.
6. CENTER CONTACT SUPPLIED UNASSEMBLED.
7. MATERIALS:
 - INSULATOR: TEFLON, ASTM-D-1457
 - GASKET: SILICONE RUBBER, ZZ-R-765
 - OUTER CONTACT } PHOSPHOR BRONZE, QQ-B-750
 - C-RING }
 - ALL OTHER METAL PARTS: BRASS, ASTM-B16
8. FINISHES:
 - CONTACT: HARD GOLD PLATE PER MIL-G-45204
 - OUTER CONTACT: SILVER PLATE PER QQ-S-365
 - ALL OTHER METAL PARTS: KINGS TARNISH RESISTANT FINISH (TR-5)
9. ELECTRICAL CHARACTERISTICS:
 - NOMINAL IMPEDANCE: 50 OHMS
 - WORKING VOLTAGE: 1000 VRMS
 - FREQUENCY RANGE: DC TO 11 GHz

REVISIONS

ISSUE	CHANGES
4	CN 34063 C REDRAWN JCA 09/10/92

KN-59-242-M06

JCA3104

SCALE 4:1

APPROX SURFACE AREA

USED ON

REF:

PLUG, N

DRAWN JCA	DATE 09/10/92
DESIGN LJ	DATE 09/11/92
APPR.	DATE

KINGS
ELECTRONICS CO., INC.
TUCKAHOE, NEW YORK 10707

KN-59-242-M06

GSD