



## 240W Single Output Industrial DIN RAIL with PFC Function

**SDR-240** series

## ■ Features :

- High efficiency 94% and low power dissipation
- 150% peak load capability
- Built-in active PFC function, PF>0.93
- Protections: Short circuit / Overload / Over voltage / Over temperature
- Cooling by free air convection
- Can be installed on DIN rail TS-35/7.5 or 15
- UL 508 (industrial control equipment) approved
- EN61000-6-2(EN50082-2) industrial immunity level
- Built-in DC OK relay contact
- 100% full load burn-in test
- 3 years warranty



## SPECIFICATION

| MODEL                                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | SDR-240-24                                                                                                                                                                                                                                                     |  | SDR-240-48 |  |
|-----------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|------------|--|
| OUTPUT                                  | DC VOLTAGE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | 24V                                                                                                                                                                                                                                                            |  | 48V        |  |
|                                         | RATED CURRENT                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | 10A                                                                                                                                                                                                                                                            |  | 5A         |  |
|                                         | CURRENT RANGE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | 0 ~ 10A                                                                                                                                                                                                                                                        |  | 0 ~ 5A     |  |
|                                         | RATED POWER                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | 240W                                                                                                                                                                                                                                                           |  | 240W       |  |
|                                         | PEAK CURRENT                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | 15A                                                                                                                                                                                                                                                            |  | 7.5A       |  |
|                                         | PEAK POWER <small>Note.6</small>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | 360W (3sec.)                                                                                                                                                                                                                                                   |  |            |  |
|                                         | RIPPLE & NOISE (max.) <small>Note.2</small>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | 100mVp-p                                                                                                                                                                                                                                                       |  | 120mVp-p   |  |
|                                         | VOLTAGE ADJ. RANGE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | 24 ~ 28V                                                                                                                                                                                                                                                       |  | 48 ~ 55V   |  |
|                                         | VOLTAGE TOLERANCE <small>Note.3</small>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | ±1.0%                                                                                                                                                                                                                                                          |  | ±1.0%      |  |
|                                         | LINE REGULATION                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | ±0.5%                                                                                                                                                                                                                                                          |  | ±0.5%      |  |
|                                         | LOAD REGULATION                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | ±1.0%                                                                                                                                                                                                                                                          |  | ±1.0%      |  |
|                                         | SETUP, RISE TIME                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | 1500ms, 60ms/230VAC      3000ms, 60ms/115VAC at full load                                                                                                                                                                                                      |  |            |  |
| HOLD UP TIME (Typ.)                     | 20ms/230VAC      20ms/115VAC at full load                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                                                                                                                                                                                                                                                                |  |            |  |
| INPUT                                   | VOLTAGE RANGE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | 88 ~ 264VAC      124 ~ 370VDC                                                                                                                                                                                                                                  |  |            |  |
|                                         | FREQUENCY RANGE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | 47 ~ 63Hz                                                                                                                                                                                                                                                      |  |            |  |
|                                         | POWER FACTOR (Typ.)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 0.93/230VAC      0.99/115VAC at full load                                                                                                                                                                                                                      |  |            |  |
|                                         | EFFICIENCY (Typ.) <small>Note.8</small>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | 94%                                                                                                                                                                                                                                                            |  |            |  |
|                                         | AC CURRENT (Typ.)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | 2.6A/115VAC      1.3A/230VAC                                                                                                                                                                                                                                   |  |            |  |
|                                         | INRUSH CURRENT (Typ.)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 33A/115VAC      65A/230VAC                                                                                                                                                                                                                                     |  |            |  |
|                                         | LEAKAGE CURRENT                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | <1mA / 240VAC                                                                                                                                                                                                                                                  |  |            |  |
| PROTECTION                              | OVERLOAD                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | Normally works within 110 ~ 150% rated output power for more than 3 seconds and then shut down o/p voltage with auto-recovery<br>>150% rated power, constant current limiting with auto-recovery within 2 seconds and may cause to shut down if over 2 seconds |  |            |  |
|                                         | OVER VOLTAGE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | 29 ~ 33V                                                                                                                                                                                                                                                       |  | 56 ~ 65V   |  |
|                                         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | Protection type : Shut down o/p voltage with auto-recovery                                                                                                                                                                                                     |  |            |  |
|                                         | OVER TEMPERATURE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | 95℃ ±5℃ (TSW : detect on heatsink of power switch)<br>Protection type : Shut down o/p voltage, recovers automatically after temperature goes down                                                                                                              |  |            |  |
| FUNCTION                                | DC OK REALY CONTACT RATINGS (max.)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | 60Vdc/0.3A, 30Vdc/1A, 30Vac/0.5A resistive load                                                                                                                                                                                                                |  |            |  |
| ENVIRONMENT                             | WORKING TEMP. <small>Note.5</small>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | -25 ~ +70℃ (Refer to output load derating curve)                                                                                                                                                                                                               |  |            |  |
|                                         | WORKING HUMIDITY                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | 20 ~ 95% RH non-condensing                                                                                                                                                                                                                                     |  |            |  |
|                                         | STORAGE TEMP., HUMIDITY                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | -20 ~ +85℃, 10 ~ 95% RH                                                                                                                                                                                                                                        |  |            |  |
|                                         | TEMP. COEFFICIENT                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | ±0.03%/℃ (0 ~ 50℃ )                                                                                                                                                                                                                                            |  |            |  |
|                                         | VIBRATION                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | Component:10 ~ 500Hz, 2G 10min./1cycle, 60min. each along X, Y, Z axes; Mounting: Compliance to IEC60068-2-6                                                                                                                                                   |  |            |  |
| SAFETY & EMC<br><small>(Note 4)</small> | SAFETY STANDARDS                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | UL508, TUV EN60950-1 approved                                                                                                                                                                                                                                  |  |            |  |
|                                         | WITHSTAND VOLTAGE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | I/P-O/P:3KVAC    I/P-FG:1.5KVAC    O/P-FG:0.5KVAC    O/P-DC OK:0.5KVAC                                                                                                                                                                                         |  |            |  |
|                                         | ISOLATION RESISTANCE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | I/P-O/P, I/P-FG, O/P-FG:>100M Ohms / 500VDC / 25℃ / 70% RH                                                                                                                                                                                                     |  |            |  |
|                                         | EMI CONDUCTION & RADIATION                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | Compliance to EN55022 (CISPR22) Class B                                                                                                                                                                                                                        |  |            |  |
|                                         | HARMONIC CURRENT                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | Compliance to EN61000-3-2,-3                                                                                                                                                                                                                                   |  |            |  |
|                                         | EMS IMMUNITY                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | Compliance to EN61000-4-2,3,4,5,6,8,11, ENV50204, EN55024, EN61000-6-2 (EN50082-2), EN61204-3, heavy industry level, criteria A, SEMI F47, GL approved                                                                                                         |  |            |  |
| OTHERS                                  | MTBF                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | 169.3Khrs min.    MIL-HDBK-217F (25℃ )                                                                                                                                                                                                                         |  |            |  |
|                                         | DIMENSION                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | 63*125.2*113.5mm (W*H*D)                                                                                                                                                                                                                                       |  |            |  |
|                                         | PACKING                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | 1.03Kg; 12pcs/13.4Kg/1.06CUFT                                                                                                                                                                                                                                  |  |            |  |
| NOTE                                    | 1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25℃ of ambient temperature.<br>2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor.<br>3. Tolerance : includes set up tolerance, line regulation and load regulation.<br>4. The power supply is considered a component which will be installed into a final equipment. The final equipment must be re-confirmed that it still meets EMC directives.<br>5. Installation clearances : 40mm on top, 20mm on the bottom, 5mm on the left and right side are recommended when loaded permanently with full power.<br>In case the adjacent device is a heat source, 15mm clearance is recommended.<br>6. 3 seconds max., please refer to peak loading curves.<br>7. Derating may be needed under low input voltage. Please check the derating curve for more details.<br>8. After 30 minutes of burn-in. |                                                                                                                                                                                                                                                                |  |            |  |




240W Single Output Industrial DIN RAIL with PFC Function

SDR-240 series

Mechanical Specification

Case No. 979A    Unit:mm

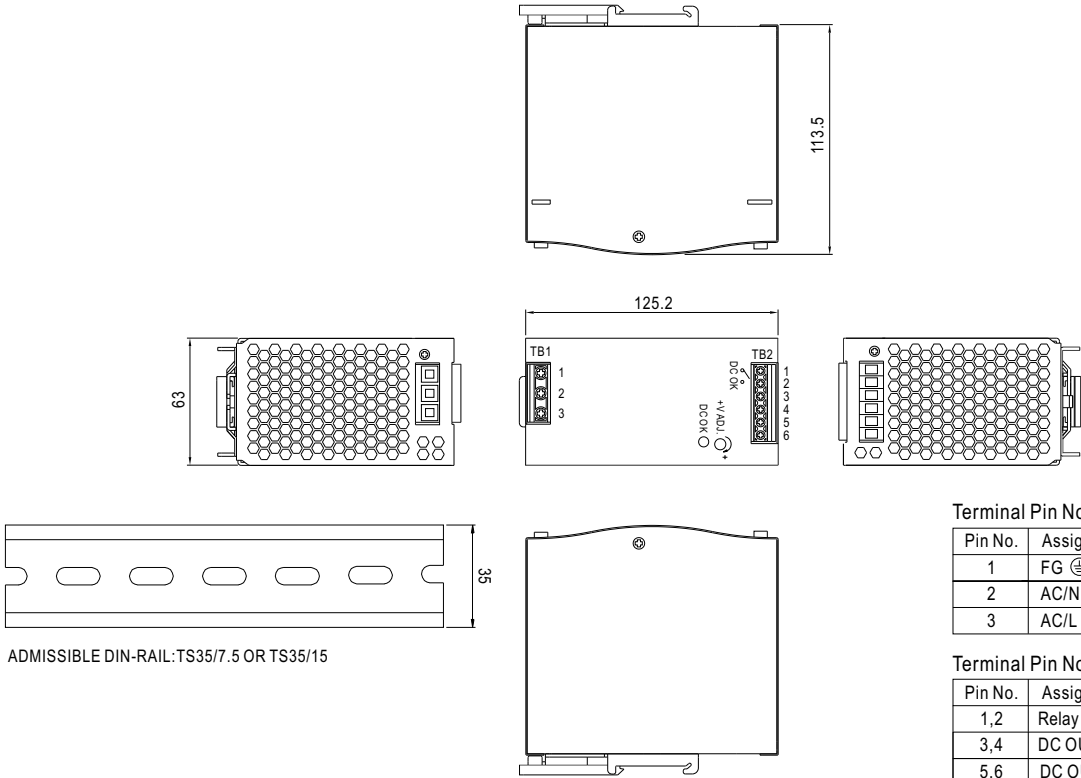


Terminal Pin No. Assignment (TB1)

| Pin No. | Assignment  |
|---------|-------------|
| 1       | FG $\oplus$ |
| 2       | AC/N        |
| 3       | AC/L        |

Terminal Pin No. Assignment (TB2)

| Pin No. | Assignment    |
|---------|---------------|
| 1,2     | Relay Contact |
| 3,4     | DC OUTPUT +V  |
| 5,6     | DC OUTPUT -V  |

Block Diagram

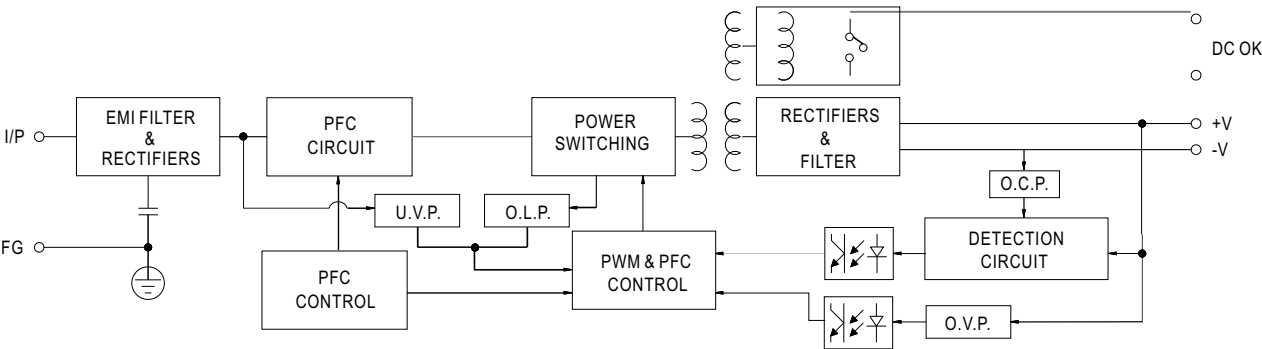

DC OK Relay Contact



|                        |                                                              |
|------------------------|--------------------------------------------------------------|
| Contact Close          | When the output voltage reaches the adjusted output voltage. |
| Contact Open           | When the output voltage drop below 90% output voltage.       |
| Contact Ratings (max.) | 30V/1A resistive load                                        |




240W Single Output Industrial DIN RAIL with PFC Function

SDR-240 series

■ Peak Loading

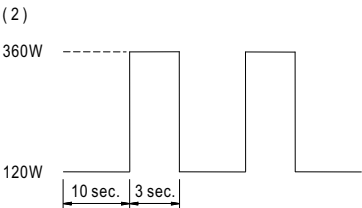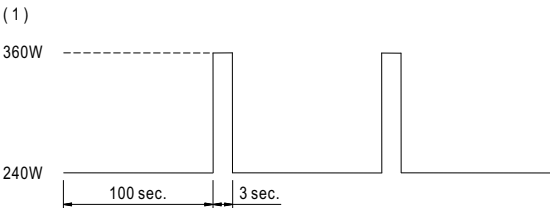

■ Derating Curve

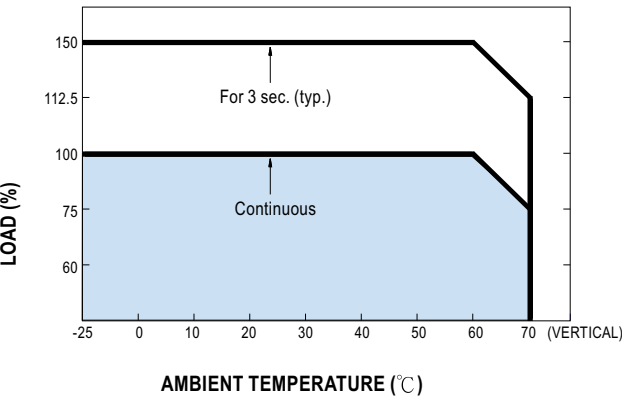

■ Output derating VS input voltage

